

# GlobalEPD

A VERIFIED ENVIRONMENTAL DECLARATION



Environmental  
Product  
Declaration

EN ISO 14025:2010  
EN 15804:2012+A1:2013

# AENOR

Ceramic tiles. Porcelain tiles.  
(Bla classification according to  
UNE-EN 14411:2016)

Date of issue: 27-02-2024  
Expiry date: 27-01-2025

The declared validity is subject to registration and  
publication on [www.aenor.com](http://www.aenor.com)

GlobalEPD Code: GlobalEPD EN 17160 - 026

# ASCALE

## ASCALE ELITE S.L.U.



The EPD holder is responsible for the content of the Declaration. The holder is responsible for keeping the records and documents supporting the content of the Declaration



#### Holder of the Declaration

ASCALE ELITE, S.L.U.  
Ctra. Castellón-Teruel km 117, DS  
Foyes Ferraes  
Tel (+34) 964 77 77 00  
12110 ALCORA (Castellón)  
Spain

Tel. (+34) 964 77 77 00  
Mail [info@ascale.es](mailto:info@ascale.es)  
Web <https://ascale.es/>



Instituto de Tecnología Cerámica

#### LCA Study

Instituto de Tecnología Cerámica –  
(ITC-AICE)  
Campus Universitario Riu Sec,  
Avda. de Vicent Sos Baynat s/n  
12006 Castellón  
Spain

Tel. (+34) 964 34 24 24  
Mail [r\\_medioambiente@itc.uji.es](mailto:r_medioambiente@itc.uji.es)  
Web <http://www.itc.uji.es>



#### Program operator GlobalEPD

AENOR CONFÍA, S.A.U.  
C/ Génova 6  
28009 Madrid  
Spain

Tel. (+34) 902 102 201  
Mail [aenordap@aenor.com](mailto:aenordap@aenor.com)  
Web [www.aenor.com](http://www.aenor.com)

AENOR is a founding member of the European ECO Platform  
Association of Administrators of the EPD Verification Programme

GlobalEPD-RCP-002 rev. 1

CEN standard EN 15804:2012+A1:2013 serves as the core RCP

Independent verification of the declaration and data, according to, EN  
ISO 14025:2010

Interna

Externa

Verification Body

**AENOR**

## 1. General information

### 1.1. The organization

PAMESA CERÁMICA is the parent company of the Pamesa Group, which aims to be a leading benchmark in the design, manufacture and marketing of ceramic products that satisfies its customers' needs and guarantees excellent quality, design and value for money.

### 1.2. Scope of the Declaration

This Environmental Product Declaration includes environmental information about a product aggrupation manufactured by PAMESA CERÁMICA and commercialized by ASCALE ELITE S.L.U, in the geographical and technological environment of Spain in the year 2018.

The results shown present the environmental behaviour of the ceramic coverings belonging the average Bla group, as well as the environmental data of the tiles which present a minimum and maximum impact, thus delimitating the results obtained in the LCA for the average product. The scope of this Environmental Product Declaration (from now on EPD) is from cradle-to-gate.

### 1.3. Lyfe cycle and conformity

This EPD was drafted and verified in accordance with the EN ISO 14025:2010 and EN 15804:2012+A1:2013 Standards and the Product Category Rules (PCR) listed in table 1.

This EPD includes the lifecycle stages listed in table 2. The EPD type is cradle-to-gate.

**Table 1** Information about the PCR

|                    |                          |
|--------------------|--------------------------|
| Title              | Ceramic tiles.           |
| Registration code  | GlobalEPD-RCP-002 rev. 1 |
| Issue date         | 2018-07-11               |
| Conformity         | UNE EN 15804             |
| Programme          | GlobalEPD                |
| Programme Operator | AENOR                    |

This EPD may not be comparable with those developed in other programs or under different reference documents; it may not be comparable with EPD that are not developed under EN 15804:2012+A1:2013 standard. In the same way, Environmental Product Declarations cannot be subject to comparison if the origin of the data is different (the databases, for example), if not all relevant information modules are included, or if they are not based on the same scenarios.

Comparison of construction products shall be based on the same function, using the same functional unit at building level (or architectural or civil engineering works), i.e. including the performance of the product during the life cycle and the requirements stated in EN ISO 14025:2010.

**Table 2** System boundary. Information modules included

|  |    |   |     |
|--|----|---|-----|
| <b>Product Stage</b>   | A1 | Raw material supply                         | X   |
|  | A2 | Transport to the manufacturer               | X   |
|  | A3 | Manufacturing                               | X   |
| <b>Const.</b>  | A4 | Transport to the building site              | MNA |
|  | A5 | Installation / construction                 | MNA |
| <b>Use stage</b>   | B1 | Use   | NR  |
|  | B2 | Maintenance                                 | MNA |
|  | B3 | Repair                                      | NR  |
|  | B4 | Replacement                                 | NR  |
|  | B5 | Refurbishment                               | NR  |
|  | B6 | Operational energy use                      | NR  |
|  | B7 | Operational water use                       | NR  |
| <b>End of life</b>   | C1 | De-construction / demolition                | NR  |
|  | C2 | Transport                                   | MNA |
|  | C3 | Waste processing                            | MNA |
|  | C4 | Disposal                                    | MNA |
|  | D  | Reuse, recovery and/or recycling potentials | X   |
| X = Module included in the LCA;<br>NR = Not relevant module; MNA = Module not assessed |    |   |     |

## 2. The product

### 2.1. Identification of the product.

This Environmental Product Declaration covers the ceramic tiles pertaining the water absorption group Bla (porcelain stoneware tiles), classification based on EN 14411:2016 (equivalent to ISO13006:2018), this is their water absorption is less than 0.5%.

The porcelain stoneware tiles included in the study cover different models with different formats. The thickness formats included in the scope of this EPD are from 8mm to 14mm, with an average weight of 22.5kg/m<sup>2</sup>.

The results of the formats included in the boundary of the present EDP are shown in the Annexes, they present the maximum and minimum environmental impact, and correspond with the 30x30 cm format of 8mm of thicknesses and 60x60 cm format of 14 mm of thicknesses respectively.

### 2.2. Intended use of the product

The function of the product is to cover surfaces. In this study the environmental behaviour of the porcelain stoneware tiles as indoor house surface covering has been assessed, however, the versatility of these pieces allows them to be installed in other places, such as offices, stores, hospitals, etc, in indoor and outdoor environments, as well as covering walls and other surfaces.

The product features are included in the technical datasheets which can be requested from the manufacturer, being them, the ones required by the EN 14411:2016 standard.

### 2.3. Composition of the product.

None of the end-product components are included in the Candidate List of substances of very high concern for authorisation.

**Table 3** Composition of the product

| Raw materials  | Content | Units             |
|--|---------|-------------------|
| Clay, feldspar, sand, kaolin, deflocculant, unfired and fired tile scrap                           | 96%     | kg/m <sup>2</sup> |
| Feldspar, carbonates, quartz, borates, silicates, kaolin, zirconium oxide, clays, zinc oxide, etc. | 4%      | kg/m <sup>2</sup> |

### 3. Information regarding the LCA

#### 3.1. Life cycle análisis.

The Life Cycle Analysis which is the base of the present EPD has been carried out from the data directly provided by the manufacturer PAMESA CERÁMICA, concerning its porcelain stoneware tiles manufactured in 2018 in six different production centers.

The Life Cycle Analysis in which this declaration is based has been carried out following the ISO 14040 and ISO 14044 standards and the GlobalEPD RCP-002 rev. 1 document of ceramic coverings of the Global EPD Programme administrated by AENOR, which meets the EN 15804:2012+A1:2013 standard.

The results associated to the ceramic tiles of highest and lowest environmental impact (which correspond with 30x30 cm and 8 mm of thickness, and 60x60 cm and 14 mm of thickness formats, respectively), are included in the Annexes I and II. The LCA has been carried out using GaBi 9.1.053 software and the data base version 8.007 (Thinkstep). The characterization factors used are those included in EN 15804:2012+A1:2013 standard.

#### 3.2. Functional Unit.

The functional unit considered is the covering of 1 m<sup>2</sup> surface (floor) for 50 years with ceramic tiles of BIa group.

#### 3.3. Reference service life.

The Service Life of the product is the same as that of the building where it is installed if it is installed correctly, as it is a durable product which does not require substitution. A Reference Service Life of 50 years has been considered.

#### 3.4. Allocation and cut-off criteria.

In this cradle-to-gate LCA study, a cut-off rule of 1% for the energy use (renewable and non -renewable) and 1% of total mass in those unitary processes, whose data is insufficient, have been applied. In total, more than 95% of all mass and energy inputs and outputs of the system have been included, excluding the not available nor quantified data.

The excluded dataset are:

- Diffuse particulate emissions generated by transport and storage of powdery raw materials.
- Non-regulated channeled emissions from combustion stage (spray drying, ceramic tiles drying and firing stage).
- The waste recycling and reuse processes generated throughout the life cycle of ceramic tiles based on Product Category Rules (PCR). However, the waste recycling process and their benefits are considered in module D.
- Industrial machinery and equipment manufacture, owing to the lack of currently available data, the cost/complexity of analysis and the relatively low environmental impact per FU compared to other processes in the case of building products. In addition, these processes are not included in the used databases. Waste generated during the maintenance of this machinery and equipment are also excluded due to the low impact caused


### **3.5. Representativeness, quality and selection of datas.**

The raw data has been directly provided by PAMESA, this data corresponds to six production centres of the enterprise property. The secondary data comes from GaBi database, 8007 compilation and it has been modeled with GaBi 9.1.053 version. All data correspond to a 2018 geographical Spanish scene.

The results presented are representative of ceramic coverings, expressed as average values weighted by the production of the ceramic coverings pertaining Bla group, delimiting it by the products which present the minimum and maximum environmental impact.

### **3.6. Other calculation rules and hypotheses.**

The load assignments applied have been the necessary ones to make it possible to quantify the specific data of covering tiles, as well as to carry out the necessary calculations to assign the associated data to the products which present a maximum and a minimum environmental impact.

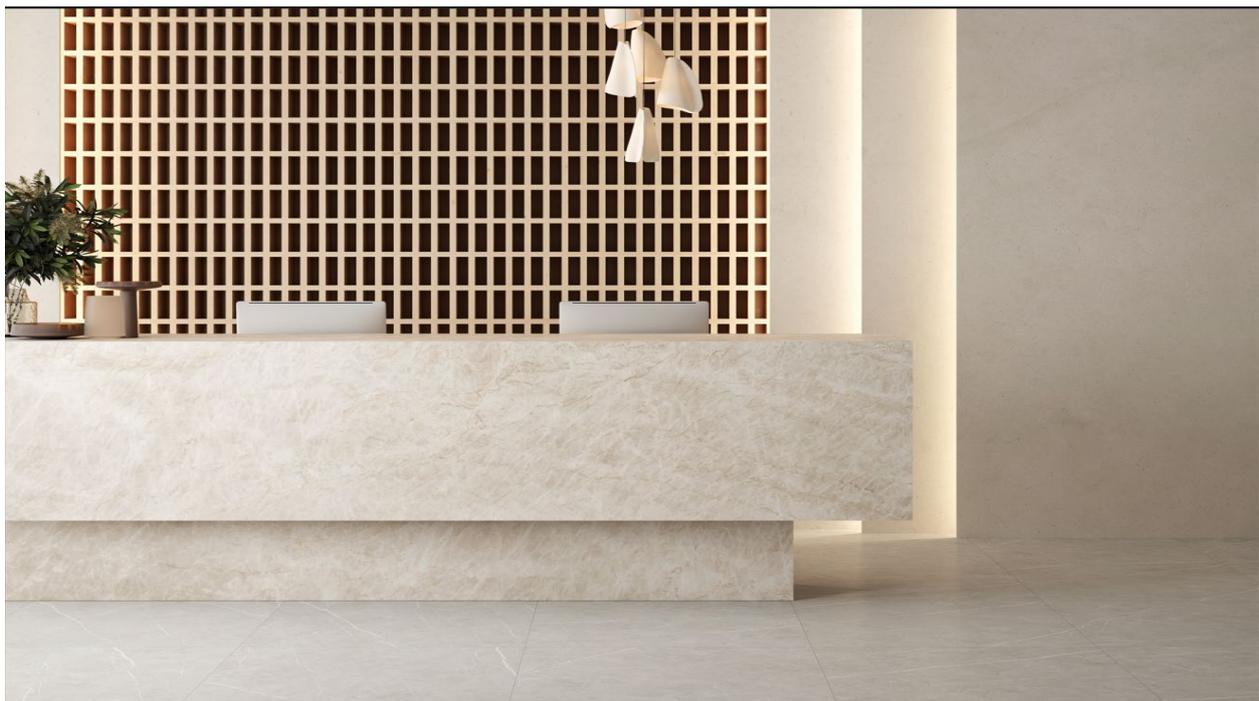


## 4. System boundaries, scenarios and additional technical information

### 4.1. Processes that precede manufacturing (upstream) and manufacturing of the product (A1-A3)

The present environmental product declaration refers to the environmental behaviour of ceramic tiles manufactured by PAMESA.

All the product stage modules relevant for the ceramic coverings according to the RCP have been included.

#### Product Stage

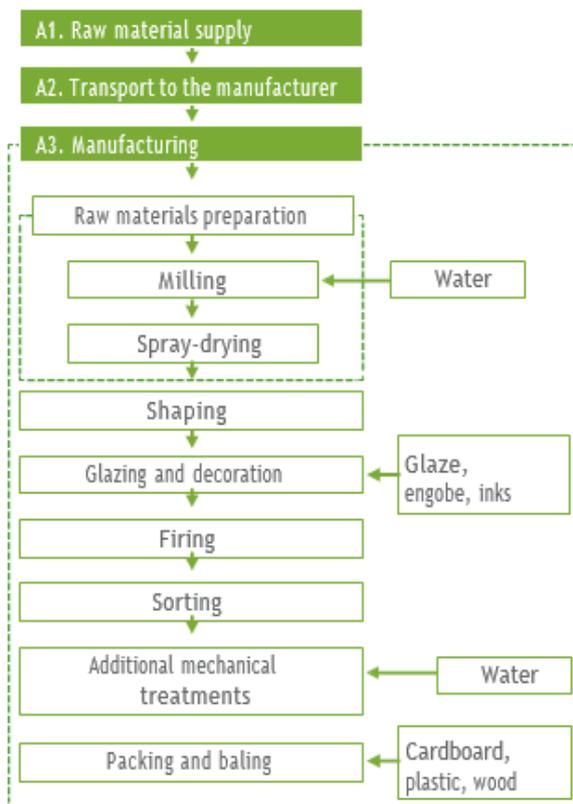

### Raw materials supply and transport (A1 and A2)

The raw materials required for the ceramic tiles manufacturing are classified as: plastic raw materials and non-plastic or degreasing raw materials. In general, it can be accepted that the proportion among these two.

types of raw materials should be such that the mixture obtained is as plastic as necessary to correctly mould the piece, and at the same time, it confers the enough resistance on green tiles to process them. The key plastic raw materials are clays and kaolins. The more common non-plastic or degreasing raw materials are silica sands and alkaline feldspars. Other raw materials to consider are the residues of the own plant, these can be sludge or fired or unfired tile scrap, which are introduced into the raw materials milling stage.

Regarding glaze raw materials, the most used in the formulation are the following ones: quartz, kaolin, alkaline feldspars, nepheline, calcium carbonate, dolomite, zircon, wollastomita, calcined alumina and ceramic frits. Moreover, ceramic pigments prepared in an external company are also used, generally by oxide calcination and additives, (deflocculants, bindings) in order to maintain the optimal rheologic properties of the suspension which would assist the glazing operations and the obtention of the required aspect (texture and colour uniformity).

The ceramic frits are insoluble glasses, prepared in an external company by complete fusion of their original raw materials, called "frits". It is estimated that around 35% of the raw materials used in

the glaze applied on porcelain stoneware tiles are submitted to fritting process.

The raw materials used have different origins according to their nature and properties. The raw materials coming from outside Spain are transported by freighter to the port of Castelló, and from there by truck to the production plants. For sea transport the freighter selected is a transoceanic one, whose distance traversed depends on the origin of each case, whereas for road transport a 27t truck which meets the Euro6 standard has been chosen. All raw materials are transported in bulk, that is, they do not require packaging material, except the decoration materials which are transported in a 17,3t payload truck which meets the Euro 5 standard, from the frits and glaze factory to PAMESA CERÁMICA plants.

### **Manufacturing (A3)**

The raw material preparation of PAMESA CERÁMICA is carried out by enterprises of the same business group. In this process the origin and the proportion of raw materials is defined, adjusting it to the production process characteristics and the final performance required.

Once the spray – dried granule has been obtained, it is transported to the manufacturing plants. This process and the following treatments applied to the tiles are carried out in PAMESA's facilities. The procedure is the following: the spray-dried powder is discharged in storage hoppers and with a feed system based in conveyor belts with weight control, this granule is sent to the forming stage by uniaxial dry pressing, carried out by hydraulic or oleodinamic presses. This is the most indicated method to control the pressing cycle.

The pieces formed are placed in a continuous dryer to reduce their humidity, duplicating or triplicating their mechanical resistance, which allows for their subsequent processing.

The tiles coming from the dryer are covered with one or more thin layers of engobe and glaze, which are applied over the ceramic body through spraying and digital glaze techniques. Then, they are decorated using different types of applications, where the most widespread is the inkjet one and to a lesser extent, the decoration using grains and photogravure. This treatment is used to confer the product surface a series of technique and aesthetic features, as impermeability, ease of cleaning, brightness, colour, superficial texture, chemical and mechanical resistance.

Firing is the most important stage of the ceramic tiles production process, as it is when the pieces, previously shaped, experience a fundamental modification of their features, resulting in a tough, water and chemical resistant product. The ceramic pieces are subject to a single firing single-deck roller kiln.

Once the quality controls are met, the classified pieces are packaged in primary cardboard packs and wood pallets. Finally, they are covered with film.

### **4.2. Benefits and loads beyond the system.**

It has been considered that loads are avoided in the gestion of packing residues (cardboard, plastic and wood) generated during the manufacturing stage.

## 5. Declaration of the environmental parameters of the LCA and LCI

The following table includes the averaged data of the LCA parameters.

The results associated with ceramic tiles that have a greater and lesser environmental impact are presented in Annexes I and II

**Table 4.** Parameters describing environmental impacts defined in EN 15804

| Parameters  | A1      | A2      | A3       | A4  | A5  | B1 | B2  | B3 | B4 | B5 | B6 | B7 | C1 | C2  | C3  | C4  | D         |
|---|---------|---------|----------|-----|-----|----|-----|----|----|----|----|----|----|-----|-----|-----|-----------|
|  GWP  | 2,1     | 4,3E-01 | 7,1      | MNA | MNA | NR | MNA | NR | NR | NR | NR | NR | NR | MNA | MNA | MNA | -3,3E- 03 |
|  ODP  | 5,6E-08 | 2,2E-11 | -2,2E-10 |     |     |    |     |    |    |    |    |    |    |     |     |     | -3,0E-11  |
|  AP   | 8,5E-03 | 3,7E-03 | 8,9E-03  |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,9E-05  |
|  EP   | 1,7E-03 | 4,0E-04 | 7,7E-04  |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,2E-06  |
|  POCP | 6,9E-04 | 2,3E-04 | 8,2E-04  |     |     |    |     |    |    |    |    |    |    |     |     |     | -2,3E-06  |
|  ADPE | 1,7E-06 | 2,5E-08 | 1,8E-07  |     |     |    |     |    |    |    |    |    |    |     |     |     | -2,5E-10  |
|  ADPF | 30,2    | 5,8     | 117,0    |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,1E-01  |

**GWP [kg CO<sub>2</sub> eq]** Global warming potential. **ODP [kg CFC-11 eq]** Depletion potential of the stratospheric ozone layer. **AP [kg SO<sub>2</sub> eq]** Depletion potential of the stratospheric ozone layer. **EP [kg (PO)<sub>3</sub>- eq]** Eutrophication potential. **POCP [kg etileno eq]** Formation potential of tropospheric ozone. **ADPE [kg Sb eq]** Abiotic depletion potential for non fossil resource. **ADPF [MJ]** Abiotic depletion potential for fossil resources

**Table 5.** Parameters describing resource use

| Parameters | A1   | A2      | A3      | A4  | A5  | B1 | B2  | B3 | B4 | B5 | B6 | B7 | C1 | C2  | C3  | C4  | D        |
|------------|------|---------|---------|-----|-----|----|-----|----|----|----|----|----|----|-----|-----|-----|----------|
| PERE       | 13,6 | 2,5E-01 | 1,7     | MNA | MNA | NR | MNA | NR | NR | NR | NR | NR | NR | MNA | MNA | MNA | -1,6E-01 |
| PERM       | 0    | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| PERT       | 13,6 | 2,5E-01 | 1,7     |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,6E-01 |
| PENRE      | 34,8 | 5,8     | 118,0   |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,1E-01 |
| PENRM      | 0    | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| PENRT      | 34,8 | 5,8     | 118,0   |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,1E-01 |
| SM         | 0    | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| RSF        | 0    | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| NRSF       | 0    | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| FW         | 4,1  | 2,1E-02 | 3,8E-01 |     |     |    |     |    |    |    |    |    |    |     |     |     | 1,1E-04  |

**PERE [MJ]** Use of renewable primary energy excluding renewable primary energy resources used as raw materials **PERM [MJ]** Use of renewable primary energy resources used as raw materials. **PERT [MJ]** Total use of renewable primary energy resources. **PENRE [MJ]** Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials **PENRM [MJ]** Use of non renewable primary energy resources used as raw materials. **PENRT [MJ]** Total use of non renewable primary energy resources. **SM [MJ]** Use of secondary material. **RSF [MJ]** Use of renewable secondary fuels. **NRSF [MJ]** Use of non renewable secondary fuels. **FW [m<sup>3</sup>]** Net use of fresh water

**Table 6** Parameters describing output flows and waste categories

| Parameters | A1      | A2      | A3      | A4  | A5  | B1  | B2  | B3  | B4  | B5  | B6  | B7  | C1  | C2  | C3  | C4  | D        |
|------------|---------|---------|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| HWD        | 2,5E-03 | 0       | 1,8E-02 | MNA | 1,7E-06  |
| NHWD       | 9,8     | 1,8E-02 | 37,4    |     |     |     |     |     |     |     |     |     |     |     |     |     | -1,4E-04 |
| RWD        | 1,5E-03 | 7,7E-06 | 0       |     |     |     |     |     |     |     |     |     |     |     |     |     | -3,5E-07 |
| CRU        | 0       | 0       | 0       |     |     |     |     |     |     |     |     |     |     |     |     |     | 0        |
| MFR        | 0       | 0       | 0       |     |     |     |     |     |     |     |     |     |     |     |     |     | -1,1E-02 |
| MER        | 0       | 0       | 0       |     |     |     |     |     |     |     |     |     |     |     |     |     | 0        |
| EE         | 0       | 0       | 0       |     |     |     |     |     |     |     |     |     |     |     |     |     | 0        |
| EET        | 0       | 0       | 0       |     |     |     |     |     |     |     |     |     |     |     |     |     | 0        |

**HWD [kg]** Hazardous waste disposed **NHWD [kg]** Non hazardous waste disposed. **RWD [kg]** Radioactive waste disposed. **CRU [kg]** Components for re-use. **MFR [kg]** Materials for recycling. **MER [kg]** Materials for energy recovery. **EE [kg]** Exported electric energy. **EET [kg]** Exported thermal energy

## 6. Additional environmental information.

### 6.1. Indoor emissions.

During the manufacturing process of ceramic tiles, they are put through a thermal process that exceeds 1000 °C. At such temperatures, any organic compound present in the compositions breaks down, with the result of producing an inert end product that is free of volatile organic compounds that can be emitted in its use phase.

### 6.2. Release to soil and water.

The ceramic tiles do not emit any compounds into the land or into water once installed by the customer in their end use stage, since the product is virtually inert and so does not undergo physical, chemical or biological transformations, is neither soluble nor combustible, does not react either physically or chemically or in any other way, is not biodegradable, does not negatively affect other materials with which it comes into contact in a way that may give rise to environmental pollution or to damage to human health. It is a non-leaching product, so that it does not endanger the quality of surface water or groundwater.

## ANEXO I. Declaration of the environmental parameters of the LCA and the LCI for the format of MINIMUM environmental impact.

**Table 7.** Parameters describing environmental impacts defined in EN 15804

| Parameters | A1      | A2      | A3       | A4  | A5  | B1 | B2  | B3 | B4 | B5 | B6 | B7 | C1 | C2  | C3  | C4  | D         |
|------------|---------|---------|----------|-----|-----|----|-----|----|----|----|----|----|----|-----|-----|-----|-----------|
| GWP        | 1,3     | 3,4E-01 | 5,9      |     |     |    |     |    |    |    |    |    |    |     |     |     | -9,0E- 03 |
| ODP        | 3,2E-08 | 3,4E-12 | -1,0E-10 |     |     |    |     |    |    |    |    |    |    |     |     |     | -4,9E-11  |
| AP         | 6,7E-03 | 2,5E-03 | 1,2E-02  |     |     |    |     |    |    |    |    |    |    |     |     |     | -5,0E-05  |
| EP         | 1,5E-03 | 2,6E-04 | 7,6E-04  | MNA | MNA | NR | MNA | NR | NR | NR | NR | NR | NR | MNA | MNA | MNA | -2,9E-06  |
| POCP       | 5,2E-04 | 1,6E-04 | 8,7E-04  |     |     |    |     |    |    |    |    |    |    |     |     |     | -6,0E-06  |
| ADPE       | 8,8E-07 | 2,1E-08 | 3,7E-07  |     |     |    |     |    |    |    |    |    |    |     |     |     | -6,8E-10  |
| ADPF       | 18,9    | 4,7     | 95,3     |     |     |    |     |    |    |    |    |    |    |     |     |     | -2,9E-01  |

**GWP [kg CO2 eq]** Global warming potential. **ODP [kg CFC-11 eq]** Depletion potential of the stratospheric ozone layer. **AP [kg SO2 eq]** Depletion potential of the stratospheric ozone layer. **EP [kg (PO)3- eq]** Eutrophication potential. **POCP [kg etileno eq]** Formation potential of tropospheric ozone. **ADPE [kg Sb eq]** Abiotic depletion potential for non fossil resource. **ADPF [MJ]** Abiotic depletion potential for fossil resources

**Table 8.** Parameters describing resource use.

| Parameters | A1   | A2   | A3   | A4  | A5  | B1 | B2  | B3 | B4 | B5 | B6 | B7 | C1 | C2  | C3  | C4  | D        |
|------------|------|------|------|-----|-----|----|-----|----|----|----|----|----|----|-----|-----|-----|----------|
| PERE       | 7,9  | 7,9  | 7,9  | MNA | MNA | NR | MNA | NR | NR | NR | NR | NR | NR | MNA | MNA | MNA | -2,6E-01 |
| PERM       | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| PERT       | 7,9  | 7,9  | 7,9  |     |     |    |     |    |    |    |    |    |    |     |     |     | -2,6E-01 |
| PENRE      | 21,6 | 21,6 | 21,6 |     |     |    |     |    |    |    |    |    |    |     |     |     | -3,2E-01 |
| PENRM      | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| PENRT      | 21,6 | 21,6 | 21,6 |     |     |    |     |    |    |    |    |    |    |     |     |     | -3,2E-01 |
| SM         | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| RSF        | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| NRSF       | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| FW         | 2,3  | 2,3  | 2,3  |     |     |    |     |    |    |    |    |    |    |     |     |     | 3,4E-04  |

**PERE [MJ]** Use of renewable primary energy excluding renewable primary energy resources used as raw materials **PERM [MJ]** Use of renewable primary energy resources used as raw materials. **PERT [MJ]** Total use of renewable primary energy resources. **PENRE [MJ]** Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials **PENRM [MJ]** Use of non renewable primary energy resources used as raw materials. **PENRT [MJ]** Total use of non renewable primary energy resources. **SM [MJ]** Use of secondary material. **RSF [MJ]** Use of renewable secondary fuels. **NRSF [MJ]** Use of non renewable secondary fuels. **FW [m<sup>3</sup>]** Net use of fresh water

**Table 9.** Parameters describing output flows and waste categories.

| Parameters | A1      | A2      | A3      | A4  | A5  | B1 | B2  | B3 | B4 | B5 | B6 | B7 | C1 | C2  | C3  | C4  | D         |
|------------|---------|---------|---------|-----|-----|----|-----|----|----|----|----|----|----|-----|-----|-----|-----------|
| HWD        | 1,1E-03 | 0       | 4,3E-02 | MNA | MNA | NR | MNA | NR | NR | NR | NR | NR | NR | MNA | MNA | MNA | 4,4E-06   |
| NHWD       | 6,9     | 1,4E-02 | 15,7    |     |     |    |     |    |    |    |    |    |    |     |     |     | 1,6E-04   |
| RWD        | 1,0E-03 | 6,2E-06 | 2,0E-03 |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,5E- 06 |
| CRU        | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0         |
| MFR        | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | -2,1E- 02 |
| MER        | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0         |
| EE         | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0         |
| EET        | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0         |

**HWD [kg]** Hazardous waste disposed **NHWD [kg]** Non hazardous waste disposed. **RWD [kg]** Radioactive waste disposed. **CRU [kg]** Components for re-use. **MFR [kg]** Materials for recycling. **MER [kg]** Materials for energy recovery. **EE [kg]** Exported electric energy. **EET [kg]** Exported thermal energy

## ANEXO II. Declaration of the environmental parameters of the LCA and the LCI for the format of MAXIMUM environmental impact.

**Table 10.** Parameters describing environmental impacts defined in EN 15804

| Parameters | A1      | A2      | A3       | A4  | A5  | B1 | B2  | B3 | B4 | B5 | B6 | B7 | C1 | C2  | C3  | C4  | D        |
|------------|---------|---------|----------|-----|-----|----|-----|----|----|----|----|----|----|-----|-----|-----|----------|
| GWP        | 2,4     | 6,4E-01 | 10,8     |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,7E-02 |
| ODP        | 5,9E-08 | 6,6E-12 | -1,9E-10 |     |     |    |     |    |    |    |    |    |    |     |     |     | -9,2E-11 |
| AP         | 8,8E-03 | 4,7E-03 | 2,1E-02  |     |     |    |     |    |    |    |    |    |    |     |     |     | -9,3E-05 |
| EP         | 1,8E-03 | 4,9E-04 | 1,4E-03  | MNA | MNA | NR | MNA | NR | NR | NR | NR | NR | NR | MNA | MNA | MNA | -5,5E-06 |
| POCP       | 7,6E-04 | 2,9E-04 | 1,6E-03  |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,1E-05 |
| ADPE       | 1,7E-06 | 3,9E-08 | 6,3E-07  |     |     |    |     |    |    |    |    |    |    |     |     |     | -1,3E-09 |
| ADPF       | 35,3    | 8,7     | 175,0    |     |     |    |     |    |    |    |    |    |    |     |     |     | -5,5E-01 |

**GWP [kg CO<sub>2</sub> eq]** Global warming potential. **ODP [kg CFC-11 eq]** Depletion potential of the stratospheric ozone layer. **AP [kg SO<sub>2</sub> eq]** Depletion potential of the stratospheric ozone layer. **EP [kg (PO)<sub>3</sub>-eq]** Eutrophication potential. **POCP [kg etileno eq]** Formation potential of tropospheric ozone. **ADPE [kg Sb eq]** Abiotic depletion potential for non fossil resource. **ADPF [MJ]** Abiotic depletion potential for fossil resources

**Table 11.** Parameters describing resource use

| Parameters | A1   | A2   | A3   | A4  | A5  | B1 | B2  | B3 | B4 | B5 | B6 | B7 | C1 | C2  | C3  | C4  | D        |
|------------|------|------|------|-----|-----|----|-----|----|----|----|----|----|----|-----|-----|-----|----------|
| PERE       | 14,8 | 14,8 | 14,8 |     |     |    |     |    |    |    |    |    |    |     |     |     | -4,9E-01 |
| PERM       | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| PERT       | 14,8 | 14,8 | 14,8 |     |     |    |     |    |    |    |    |    |    |     |     |     | -4,9E-01 |
| PENRE      | 40,3 | 40,3 | 40,3 |     |     |    |     |    |    |    |    |    |    |     |     |     | -5,9E-01 |
| PENRM      | 0    | 0    | 0    | MNA | MNA | NR | MNA | NR | NR | NR | NR | NR | NR | MNA | MNA | MNA | 0        |
| PENRT      | 40,3 | 40,3 | 40,3 |     |     |    |     |    |    |    |    |    |    |     |     |     | -5,9E-01 |
| SM         | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| RSF        | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| NRSF       | 0    | 0    | 0    |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| FW         | 4,3  | 4,3  | 4,3  |     |     |    |     |    |    |    |    |    |    |     |     |     | 6,2E-04  |

**PERE [MJ]** Use of renewable primary energy excluding renewable primary energy resources used as raw materials **PERM [MJ]** Use of renewable primary energy resources used as raw materials.  
**PERT [MJ]** Total use of renewable primary energy resources. **PENRE [MJ]** Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials  
**PENRM [MJ]** Use of non renewable primary energy resources used as raw materials. **PENRT [MJ]** Total use of non renewable primary energy resources. **SM [MJ]** Use of secondary material.  
**RSF [MJ]** Use of renewable secondary fuels. **NRSF [MJ]** Use of non renewable secondary fuels. **FW [m3]** Net use of fresh water

**Table 12.** Parameters describing output flows and waste categories.

| Parameters | A1      | A2      | A3      | A4  | A5  | B1 | B2  | B3 | B4 | B5 | B6 | B7 | C1 | C2  | C3  | C4  | D        |
|------------|---------|---------|---------|-----|-----|----|-----|----|----|----|----|----|----|-----|-----|-----|----------|
| HWD        | 2,1E-03 | 0       | 8,1E-02 | MNA | MNA | NR | MNA | NR | NR | NR | NR | NR | NR | MNA | MNA | MNA | 8,2E-06  |
| NHWD       | 12,8    | 2,7E-02 | 52,4    |     |     |    |     |    |    |    |    |    |    |     |     |     | 3,0E-04  |
| RWD        | 1,9E-03 | 1,2E-05 | 3,2E-03 |     |     |    |     |    |    |    |    |    |    |     |     |     | -2,7E-06 |
| CRU        | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| MFR        | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | -3,9E-02 |
| MER        | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| EE         | 0       | 0       | 0       |     |     |    |     |    |    |    |    |    |    |     |     |     | 0        |
| EET        | 0       | 0       | 0       | 0   |     |    |     |    |    |    |    |    |    |     |     |     |          |

**HWD [kg]** Hazardous waste disposed **NHWD [kg]** Non hazardous waste disposed. **RWD [kg]** Radioactive waste disposed. **CRU [kg]** Components for re-use. **MFR [kg]** Materials for recycling. **MER [kg]** Materials for energy recovery. **EE [kg]** Exported electric energy. **EET [kg]** Exported thermal energy

## References

- [1] General Instructions of the GlobalEPD Programme, 1st revision. AENOR. February 2016
- [2] EN ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures (ISO 14025:2006)
- [3] EN 15804:2012+A1:2013 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
- [4] GlobalEPD-RCP-002 Ceramic coverings.AENOR. July 2018
- [5] Life cycle assessment according to GlobalEPD Programme for ceramic coverings. Annex I C194573 of Instituto de Tecnología Cerámica

---

## Index

|   |    |
|---|----|
| 1. General information.....   | 3  |
| 2. The product.....   | 5  |
| 3. Information regarding the LCA.....                                     | 6  |
| 4. System boundaries, scenarios and additional technical information..... | 8  |
| 5. Declaration of the environmental parameters of the LCA and LCI.....    | 10 |
| 6. Additional environmental information. ....                             | 12 |
| References.....   | 19 |

# AENOR



Una declaración ambiental verificada

# GlobalEPD