

GlobalEPD

A VERIFIED ENVIRONMENTAL DECLARATION

Environmental Product Declaration

EN ISO 14025:2010

EN 15804:2012+A1:2014

EN 17160:2019

ARCANA
CERÁMICA

ARCANA CERÁMICA, S.A.

AENOR

Ceramic Tiles. Earthenware tiles (water absorption group BIII EN 14411: 2016)

Date of issue: 2021-04-12

Modification date: 2024-12-20

Expiration date: 2026-04-11

Code GlobalEPD: EN 17160 - 002 rev1



The EPD holder is responsible for the content of the Declaration. The holder is responsible for keeping the records and documents supporting the content of the Declaration. The verifier and the program operator do not give any opinion and are not responsible for the legality of the product. EPDs for the same product category from different programs may not be comparable.

Holder of Declaration



ARCANA CERÁMICA, S.A.
Ctra. Castellón, Km 23
12110 L'Alcora (Castellón)
España

Tel (+34) 964 36 70 25
Web <https://www.arcanatiles.com>

LCV Study



Instituto de Tecnología Cerámica

Instituto de Tecnología Cerámica – (ITC-AICE)
Campus Universitario Riu Sec,
Avda. de Vicent Sos Baynat s/n
12006 Castellón
España

Tel (+34) 964 34 24 24
Mail r_medioambiente@itc.uji.es
Web <http://www.itc.uji.es>

Operator of the GlobalEPD



AENOR CONFÍA, S.A.U.
Génova 6
28004 Madrid
España

Tel (+34) 902 102 201
Mail aenordap@aenor.com
Web www.aenor.com

AENOR is a founding member of ECO Platform, the European Association of Environmental Declarations Verification Programmes

The PCRs for ceramic tiles (EN 17160:2019) serve as the basis for the PCRs for this EPD.

Verificación independiente de la Declaración y de los datos, de acuerdo con la Norma EN ISO 14025:2010

☐

Internal

☒

External

Organismo de verificación

AENOR

Product certification body accredited by ENAC with accreditation No. 1/C-PR468

1 General Information

1.1 The organization

Since 1997, Arcana Cerámica has been working to be at the forefront of ceramic production, exporting its products all over the world and adapting to the latest trends. Thanks to the most innovative production techniques and a highly qualified team, Arcana is able to provide constant progress in the design, format and finishes of its ceramic products. As part of its corporate social responsibility, Arcana Cerámica is deeply committed to providing the best technical quality to meet the most demanding needs of each specific market.

With a philosophy based on dedication to work, Arcana's main objective is to offer its customers the best possible quality. That is why the variety and beauty of our tile, stoneware and porcelain collections together with our customer service have consolidated Arcana's expansion and presence in all five continents.

1.2. Scope of the Declaration

This Environmental Product Declaration includes environmental information about a product aggrupation marked by ARCANA CERÁMICA, S.A. and manufactured by two of the company's production sites, in the geographical and technological environment of Spain in the year 2019.

The results shown present the environmental behaviour of the ceramic coverings belonging the earthenware tiles, as well as the environmental data of the tiles which present a minimum and maximum impact, thus delimitating the results obtained in the LCA for the average product. The scope of this Environmental Product Declaration (from now on EPD) is from cradle-to-grave.

1.3. Life Cycle and conformity

This EPD was drafted and verified in accordance with the ISO 14025:2006, EN 15804:2012+A1:2013 and EN 17160:2019 (PCR for ceramic tiles).

This EPD may not be comparable with those developed in other programs or under different reference documents; it may not be comparable with EPD that are not developed under EN 15804:2012+A1:2013 standard. In the same way, EPDs cannot be subject to comparison if the origin of the data is different (the databases, for example), if not all relevant information modules are included, or if they are not based on the same scenarios.

Comparison of construction products shall be based on the same function, using the same functional unit at building level (or architectural or civil engineering works), i.e. including the performance of the product during the life cycle and the requirements stated in ISO 14025:2006.

1.4. Differences from previous versions of this EPD.

This EPD is modified to include ENAC accreditation.

2 The product

2.1 Identification of the product

The 16 ceramic sizes included in this EPD covers the ceramic tiles pertaining group BIII (earthenware tiles), classification based on EN 14411:2016 (equivalent to ISO13006:2018), this is their water absorption is higher than 10% and its forming is by pressing.

The earthenware tiles included in the study cover different models with different formats. The thickness formats included in the scope of this EPD are from 7.5mm to 11mm, with an average weight of 16.2kg/m².

The results of the formats included in the boundary of the present EDP are shown in the Annexes, they present the minimum and maximum environmental impact, and correspond with the 20x20 cm size of 7.5mm of thicknesses and 13x13 cm size of 11 mm of thicknesses respectively.

The product CPC code is 37310.

2.2 Intended use of the product

The function of the product is to cover surfaces. In this study the environmental behaviour of the earthenware tiles as indoor house surface covering (walls) has been

assessed, however, the versatility of these pieces allows them to be installed in other places, such as offices, stores, hospitals, etc, in indoor and outdoor environments, as well as covering walls and other surfaces.

The product features are included in the technical datasheets which can be requested from the manufacturer, being them, the ones required by the EN 14411:2016 standard.

2.3 Composition of the product

None of the final product components are included in the Candidate List of Very Concerning Substances submitted to Authorisation.

Table 1. Main product components

	Composition	Content
Ceramic body	Clay, feldspars, sands, kaolin, carbonates and unfired ceramic scraps	96%
DECORATION	Feldspars, carbonates, quartz, silicates, kaolin, zirconium oxides, clays, alumina, zinc oxide, etc.	4%

3 Information regarding the LCA

3.1 LCA Study

The LCA has been carried out using GaBi 10.0.0.71 [5] software and the data base version 2020.1. (SP40.0) [6] (SpheraSolutions). The characterization factors used are those included in EN 15804:2012+A1:2013 standard.

3.2 Functional unit

The Functional Unit considered is **“To cover 1 m² of a surface (walls) of a residential area for 50 years with earthenware tiles”**.

3.3 Reference Service Life (RSL)

The Reference Service Life (RSL) of the product is the same as that of the building where it is installed provided that it is installed correctly, as it is a durable product which does not require substitution. A Reference Service Life of 50 years has been considered (see Table 2).

Table 2 Reference Service Life.

Parameter	Result (expressed per functional unit)
Reference Service Life	Minimum 50 years
Declared product properties (on gate), coatings, etc.	Minimum values of the relevant characteristics according to Annex L of the EN 14411 standard. For more information request technical data sheets according to model.
Design parameters of the application (manufacturer's instructions), including references to good practices.	For more information request technical data sheets according to model.
Estimated quality of work, when installed according to the manufacturer's specifications	For more information request technical data sheets according to model.
Estimation of the quality of work, when installed from outside environment (for outdoor applications), e.g. weathering, pollutants, UV radiation and wind exposure, building orientation, shading, temperature, etc.	Minimum values of the relevant characteristics according to Annex L of the EN 14411 standard. For more information request technical data sheets according to model.
Indoor environment (for indoor applications), e.g. temperature, humidity, chemical exposure	Minimum values of the relevant characteristics according to Annex L of the EN 14411 standard. For more information request technical data sheets according to model.
Conditions of use, e.g.: frequency of use, mechanical exposure, etc.	For more information request technical data sheets according to model.
Maintenance, e.g.: required frequency, type and quality and replacement of replaceable components	For more information request technical data sheets according to model.

3.4. Allocation and cut off criteria

In this cradle-to-grave LCA study, a cut-off rule of 1% for the energy use (renewable and non -renewable) and 1% of total mass in those unitary processes, whose data is insufficient, have been applied. In total, more than 95% of all mass and energy inputs and outputs of the system have been included, excluding the not available nor quantified data.

The excluded data are the following:

- Diffuse particle emissions to the atmosphere during the transportation and storage of powdery nature raw materials.
- Non-regulated channel emissions generated during combustion stages (spray drying, piece drying and firing).
- The recycling and reutilization of the residues generated during the life cycle of the ceramic coverings according to PCR. However, the recycling process of the residues and the benefits obtained from this recycled will be quantified in module D.
- Some consumable auxiliary materials production used in tiles manufacturing: polishing wheels, etc., which represent less than 0.01% of the total mass. Waste management has not been included either.
- Waste management and transport to landfill have not been included in glaze manufacturing.
- Machinery and industrial equipment production.

3.5. Representativeness, quality and selection of data

The raw data has been directly provided by ARCANA, this data corresponds to two production centres of the enterprise property. For the secondary data, the most updated GaBi ts databases [6] have been used and modelled with GaBi version 10.0.0.71[5]. All data belong to a geographical scenario of Spain 2019.

The results presented are representative of ceramic coverings, expressed as average values weighted by the production of the ceramic coverings pertaining BIII group, delimiting it by the products which present the minimum and maximum environmental impact.

3.6. Other calculation rules and hypotheses

The load assignments applied have been the necessary ones to make it possible to quantify the specific data of covering tiles, as well as to carry out the necessary calculations to assign the associated data to the products which present a maximum and a minimum environmental impact.

The spray dryer includes a simultaneous heat and electricity cogeneration system by means of gas turbines, using natural gas as fuel. The combustion of natural gas provides hot gases directly to the drying stage. The electrical energy generated is partly used in the industrial plant, thus reducing the electrical requirements of the grid, and the rest is fed into the grid for sale and subsequent distribution. In this study, the generation of electricity sold to the grid has been considered as a moved load, specifically, to thermoelectric production from fuel oil/gas, according to the rate reported in Eurostat 2018.

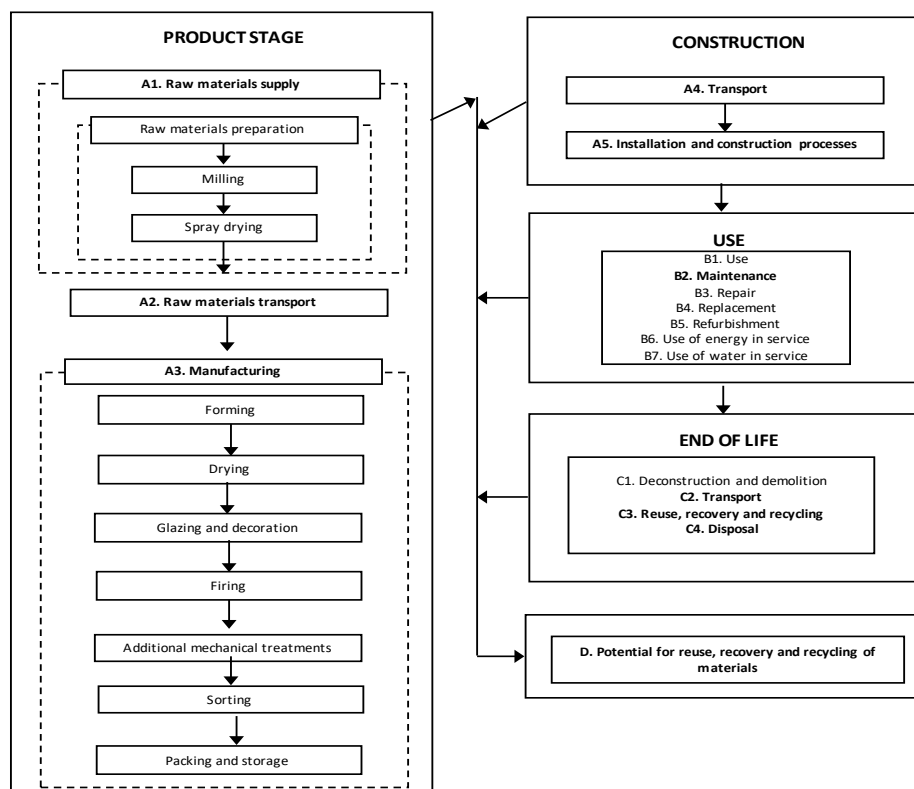


Figure 1 Installed product.

4 System boundaries, scenarios and additional technical information

All the product stage modules relevant for the ceramic coverings according to the PCR have been included.

Figure 3 System boundaries



The modules included are presented in the following table

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				D
Raw materials extraction	Transport	Manufacturing	Transport from the factory gate to the construction site	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Use of energy in service	Use of water in service	Deconstruction Demolition	Transporte	Waste treatment	Disposal	Benefits and burdens beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	NR	X	NR	NR	NR	NR	NR	NR	X	X	X	X

*NR: Not Relevant module

4.1. Processes that precede manufacturing (upstream)

Raw materials supply and transport (A1 y A2)

The raw materials required for the ceramic tiles manufacturing are classified as: plastic raw materials and non-plastic or degreasing raw materials. Specifically, the raw materials included in the composition of the support are clays, feldspars and sands, as well as waste from the factory itself, which can be sludge or ceramic pieces generated before and after the firing stage, introduced in the grinding stage of the raw materials.

Regarding glaze raw materials, the most used in the formulation are the following ones: quartz, kaolin, alkaline feldspars, nepheline, calcium carbonate, dolomite, zircon, wollastonite, calcined alumina and ceramic frits.

The ceramic frits are insoluble glasses, prepared in an external company by complete fusion of their original raw materials, called "frits". It is estimated that around 79% of the raw materials used in the glaze applied on earthenware tiles are submitted to fritting process.

The raw materials used have different origins according to their nature and properties. The raw materials coming from outside Spain are transported by freighter to the port of Castelló, and from there by truck to the production plants. For sea transport the freighter selected is a transoceanic one, whose distance traversed depends on the origin of each case, whereas for road transport a 27t truck which meets the Euro6 standard has been chosen. All raw materials are transported in bulk, that is, they do not require packaging material, except the decoration materials which are transported in a 17,3t payload truck, from the frits and glaze factory to ARCANA plants.

The preparation of raw materials for the ceramic body of ARCANA ceramic tiles is carried out in the factories of the spray-dried granule suppliers. In this process, the proportion of raw materials is defined and their origin is adjusted to the characteristics of the production process and the final performance required.

The spray-dried granules are obtained by wet milling of the raw materials and subsequent spray drying. ARCANA's supplier companies have installed heat and power cogeneration systems in their spray dryers. All hot gases are used in the spray dryer and the electricity generated is partly used in the production process, thus reducing the electrical requirements of the grid, and partly sold to the grid.

Once the spray – dried granule has been obtained, it is transported to the manufacturing plants.

4.2. Product Manufacturing

Manufacturing (A3)

This process and the following treatments applied to the tiles are carried out in ARCANA's facilities. The procedure is the following: the spray-dried powder is discharged in storage hoppers and with a feed system based in conveyor belts with weight control, this granule is sent to the forming stage by uniaxial dry pressing, carried out by hydraulic or oleodynamic presses. This is the most indicated method to control the pressing cycle.

The pieces formed are placed in a continuous dryer to reduce their humidity, duplicating or triplicating their mechanical resistance, which allows for their subsequent processing.

The tiles coming from the dryer are covered with one or more thin layers of engobe and glaze, which are applied over the ceramic body through spraying and digital glaze techniques. This treatment is used to confer the product surface a series of technique and aesthetic features, as impermeability, ease of cleaning, brightness, colour, superficial texture, chemical and mechanical resistance.

Firing is the most important stage of the ceramic tiles production process, as it is when the pieces, previously shaped, experience a fundamental modification of their features, resulting in a tough, water and chemical resistant product. The ceramic pieces are subject to a single firing single-deck roller kilns.

Once the quality controls are met, the classified pieces are packaged in primary cardboard packs and wood pallets. Finally, they are covered with film LDPE.

4.3. Construction process

Transport (A4)

Product distribution is as follows: 24% in Spain, 38% in Europe and 38% to the rest of the world.

For road transport, a 27t truck classified Euro 6 has been considered (national transport and European, average distance of 300km and 1390km, respectively). For transcontinental transport, an average transoceanic freighter has been estimated (transport to the rest of the world, 6520km), as indicated in EN 17160.

Table 3 Transport to the site

Stage of the construction process.	Transport to the construction site
Parameter	Result (expressed per functional or declared unit)
Fuel type and consumption	According to the destinations in the distribution as described above: 0.2103 l diesel (truck Euro 6 de 27 t) 0.0384 l fueloil (freighter)
Distance	300 km national distribution: 24% 1390 km European distribution: 38% 6520 km rest of the world distribution: 38%
Capacity utilisation (including no-load return)	85% in truck 100% freighter
Bulk density of transported products	415,4 kg/m ³
Usable capacity factor (factor: =1 or < 1 or ≥ 1 for products that are packed compressed or nested)	Not applicable

Product installation and construction process (A5)

Once the product is unpacked, it is installed. According to the PCRs for ceramic tiles, it has been established that the application of mortar is required for installation.

Glue mortars are cementitious adhesives consisting of a mixture of hydraulic binders, mineral fillers and organic additives, which only need to be mixed with water or liquid addition just before use. They consist of a mixture of white or grey cement, mineral fillers of siliceous and/or limestone nature and organic additives: water retaining agents, water re-dispersible polymers, rheology modifiers, fibres, etc.

The waste derived from the packaging of the pieces is managed separately according to the geographical location of the installation site. Otherwise, 3% of product losses have been considered at the installation stage.



Figure 3 Picture of an earthenware tile

Table 4 Installation of the product in the building.

TECHNICAL INFORMATION. Stage of the construction process. Installation in the building	
Parameter	Result (expressed per functional or declared unit)
Supplementary materials for installation	3,3kg
Water use	0,8 l
Use of other resources	Not applicable
Quantitative description of the type of energy (regional mix) and consumption during the installation process	Not applicable
Waste of materials at the construction site before processing of waste generated at the product installation (specified by type)	Product losses: 486g Packaging wastes: - Cardboard: 159,1 g - Plastic: 12,1g - Wood: 350,7 g
Output of materials (specified by type) as a result of waste treatment waste at the construction site, e.g. from waste collected for recycling, energy recovery, disposal (specified by route)	Product losses for recycling: 340g Product losses for final deposition: 146g Cardboard for incinerating: 14 g Cardboard for recycling: 105g Cardboard for final deposition: 40 g Plastic for incinerating: 2 g Plastic for recycling: 17g Plastic for final deposition: 7 g Wood for incinerating: 33 g Wood for recycling: 228 g Wood for final deposition: 90 g
Direct emissions to ambient air, soil and water	Not applicable

4.4. Use linked to the structure and performance of the building

Use (B1)

Once installed, the tiles do not require any energy input for their use, nor do they require maintenance after installation, except for normal cleaning operations. For this reason, of all the aforementioned modules, only the environmental loads attributable to product maintenance (module B2) are considered.

Maintenance (B2)

Cleaning is done with a damp cloth and, if the surface is dirty or greasy, cleaning agents such as detergents or bleaches can be used. In this study, water and disinfectant consumption has been considered for a wall covering installed in a residential scenario, i.e. cleaning once every three months with water and detergent during the 50-year life span.

Table 5 Use linked to the structure of the building.

TECHNICAL INFORMATION. Stage of use relating to the building	
Parameter	Result (expressed per functional or declared unit)
B2 MAINTENANCE	
Maintenance process	According to RCP for ceramic tiles (EN17160) residential wall cleaning scenario
Maintenance cycle	Washing once every three months with water and detergent
Auxiliary materials for maintenance (e.g. cleaning products) (specify each material)	Detergente: 1,34E-04 kg/m ²
Material wastage during maintenance (specify type)	Not applicable
Net tap water consumption	0.1 l/m ²
Energy input during maintenance (e.g. vacuum cleaning), type of energy carrier (e.g. electricity) and amount, if applicable and relevant	Not applicable

4.5. End of life

Deconstruction and demolition (C1)

At the end of its service life, the product will be removed, either as part of a building renovation or during demolition. In the context of the demolition of a building, the impacts attributable to the removal of the product are negligible.

Transport (C2)

The product waste is transported in a heavy-duty truck (27 t) that complies with Euro 6 standards to be managed either by deposition in inert landfills or recycling. An average distance of 20km from the building site to the container and treatment plant (by truck) and 30km from the container or treatment plant to the destination is considered. Also included is the return of the trucks (100% empty return).

Waste management for reuse, recovery and recycling (C3)

It has been estimated that 70% of tiles are recycled and/or reused, as indicated in the PCR.

Final disposal (C4)

It is estimated that 30% of the product is sent to controlled landfill after the end of its service life.

Tabla 6 End of life.

TECHNICAL INFORMATION. End of life	
Parameter	Result (expressed per functional or declared unit)
Collection process, specified by type	19,6 kg/m ²
Recovery system, specified by type	13.7 kg recycled as filler material
Disposal, specified by type	5.9 kg to controlled landfill
Assumptions for scenario development (e.g.: transport)	The product waste is transported in a heavy-duty truck (24 t) that complies with Euro 6 standards to be managed either by deposition in inert landfills or recycling. An average distance of 20km from the building site to the container and treatment plant (by truck) and 30km from the container or treatment plant to the destination is considered. Also included is the return of the trucks (100% empty return).

4.6. Benefits and loads outside the boundaries of the building system

Module D Potential environmental benefits and burdens of reuse, recovery and recycling activities

The environmental burdens and benefits of obtaining secondary material from waste generated at the manufacturing stage (waste such as cardboard, plastic and wood), at the installation stage (product losses, tile packaging waste: cardboard, plastic and wood) and at the end of life of the product have been considered.



Figure 4 Picture of an earthenware tile

5 Declaration of LCA and LCI environmental parameters

The following tables include the LCA and LCI parameter data.

The results associated with the tiles having the minimum and maximum environmental impact are presented in Annexes I and II.

Environmental impacts

Parameters	Unit	A1-A3	A4	A5	B1	B2	B3-B7	C1	C2	C3	C4	D
GWP	kg CO2 eq	10.5	5.9E-01	9.7E-01	N.R.	2.5E-02	N.R.	N.R.	7.3E-02	0	7.5E-02	-1.7E-01
ODP	kg CFC11 eq	1.3E-09	9.2E-17	4.0E-11		1.6E-08			1.2E-17	0	7.6E-14	-2.6E-09
AP	kg SO2 eq	6.5E-02	3.6E-03	3.0E-03		1.7E-04			5.0E-05	0	4.4E-04	-5.0E-04
EP	kg (PO4)3- eq	1.5E-02	4.2E-04	6.5E-04		4.0E-05			8.6E-06	0	6.0E-05	-7.4E-05
POCP	kg etileno eq	4.2E-03	2.3E-04	2.1E-04		5.7E-05			7.7E-06	0	3.5E-05	-4.3E-05
ADPE	kg Sb eq	1.0E-05	3.8E-08	1.5E-06		1.4E-09			5.3E-09	0	8.0E-09	-4.3E-08
ADPF	MJ	165.5	7.8	8.4		1.3E-01			9.9E-01	0	9.7E-01	-2.7

GWP = Potencial de calentamiento global; **ODP** = Potencial de agotamiento de la capa de ozono estratosférico; **AP** = Potencial de acidificación del suelo y de los recursos de agua; **EP** = Potencial de eutrofización; **POCP** = Potencial de formación de ozono troposférico; **ADPE** = Potencial de agotamiento de recursos abióticos para recursos no fósiles; **ADPF** = Potencial de agotamiento de recursos abióticos para recursos fósiles **N.R.** = Módulos No Relevantes

Resources use

Parameters	Unit	A1-A3	A4	A5	B1	B2	B3-B7	C1	C2	C3	C4	D
PERE	MJ	27,9	3,7E-01	1,7	N.R.	6,4E-01	N.R.	N.R.	5,6E-02	0	1,2E-01	2,4E-01
PERM	MJ	0	0	0		0			0	0	0	0
PERT	MJ	27,9	3,7E-01	1,7		6,4E-01			5,6E-02	0	1,2E-01	2,4E-01
PENRE	MJ	178,6	7,9	9,1		1,6E-01			9,9E-01	0	1,0	1,0
PENRM	MJ	0	0	0		0			0	0	0	0
PENRT	MJ	178,6	7,9	9,1		1,6E-01			9,9E-01	0	1	1,0
SM	kg	0	0	0		0			0	0	0	0
RSF	MJ	0	0	0		0			0	0	0	0
NRSF	MJ	0	0	0		0			0	0	0	0
FW	m3	3,7E-02	4,3E-04	2,5E-03		1,2E-02			6,4E-05	0	1,9E-04	-1,5E-03

PERE = Uso de energía primaria renovable excluyendo los recursos de energía primaria renovable utilizada como materia prima; **PERM** = Uso de energía primaria renovable utilizada como materia prima; **PERT** = Uso total de la energía primaria renovable; **PENRE** = Uso de energía primaria no renovable, excluyendo los recursos de energía primaria no renovable utilizada como materia prima; **PENRM** = Uso de la energía primaria no renovable utilizada como materia prima; **PENRT** = Uso total de la energía primaria no renovable; **SM** = Uso de materiales secundarios; **RSF** = Uso de combustibles secundarios renovables; **NRSF** = Uso de combustibles secundarios no renovables; **FW** = Uso neto de recursos de agua corriente. **N.R.** = Módulos No Relevantes

Output flows and residues categories.

Parameters	Unit	A1-A3	A4	A5	B1	B2	B3 - B7	C1	C2	C3	C4	D
HWD	kg	7,4E-07	3,0E-07	5,6E-08	N.R	8,4E-11	N.R	N.R	4,6E-08	0	0	0
NHWD	kg	32,9	1,1E-03	1,2		3,4E-03			1,5E-04	0	4,7	0
RWD	kg	4,6E-03	9,6E-06	2,7E-04		1,7E-06			1,2E-06	0	1,4E-05	2,4E-06
CRU	kg	0	0	0		0			0	0	0	0
MFR	kg	1,1E-02	0	4,0E-01		0			0	10,8	0	0
MER	kg	0	0	0		0			0	0	0	0
EE	MJ	0	0	0		0			0	0	0	0

HWD = Residuos peligrosos eliminados; **NHWD** = Residuos no peligrosos eliminados; **RWD** = Residuos radiactivos eliminados; **CRU** = Componentes para su reutilización; **MFR** = Materiales para el reciclaje; **MER** = Materiales para valorización energética; **EE** = Energía exportada; **N.R.** = Módulos No Relevantes

6 Additional environmental information

6.1 Indoor air emissions

In the ceramic covering manufacturing process, tiles are subjected to a thermal process above 1000°C. At these temperatures, any organic compound in the compositions decomposes, yielding an inert end-product free of any volatile organic compounds that might be released in the stage use

6.2 Release to soil and water

Ceramic coverings release no compounds into the soil or water during their use stage, because a completely inert product is involved that undergoes no physical, chemical, or biological transformations, is neither soluble nor combustible, and does not react physically or chemically or in any other way, is not biodegradable, and does not adversely affect to other materials with which it enters into contact such that it might produce environmental pollution or harm human health. It is a non-leaching product, so that it does not endanger the quality of surface water or groundwater

ANNEX I Declaration of the environmental parameters of the LCA and LCI

for the format with minimum impacts

Environmental impacts

Parámetros	Unit	A1-A3	A4	A5	B1	B2	B3-B7	C1	C2	C3	C4	D
GWP	kg CO2 eq	8,4	4,6E-01	7,6E-01	N.R.	1,9E-02	N.R.	N.R.	5,6E-02	0	5,8E-02	-1,3E-01
ODP	kg CFC11 eq	1,6E-09	7,2E-17	4,9E-11		1,3E-08			9,2E-18	0	5,9E-14	-2,1E-09
AP	kg SO2 eq	6,4E-02	2,8E-03	2,8E-03		1,3E-04			3,9E-05	0	3,4E-04	-3,9E-04
EP	kg (PO4)3- eq	1,5E-02	3,3E-04	6,0E-04		3,1E-05			6,7E-06	0	4,6E-05	-5,8E-05
POCP	kg etileno eq	4,1E-03	1,8E-04	1,9E-04		4,4E-05			6,0E-06	0	2,7E-05	-3,3E-05
ADPE	kg Sb eq	1,3E-05	3,0E-08	2,0E-06		1,1E-09			4,1E-09	0	6,2E-09	-3,3E-08
ADPF	MJ	140,2	6,1	6,9		1,0E-01			7,6E-01	0	7,5E-01	-2,1

GWP = Potencial de calentamiento global; **ODP** = Potencial de agotamiento de la capa de ozono estratosférico; **AP** = Potencial de acidificación del suelo y de los recursos de agua; **EP** = Potencial de eutrofización; **POCP** = Potencial de formación de ozono troposférico; **ADPE** = Potencial de agotamiento de recursos abióticos para recursos no fósiles; **ADPF** = Potencial de agotamiento de recursos abióticos para recursos fósiles. **N.R.** = Módulos No Relevantes

Resources use

Parámetros	Unit	A1-A3	A4	A5	B1	B2	B3-B7	C1	C2	C3	C4	D
PERE	MJ	23,4	2,9E-01	1,3	N.R.	4,9E-01	N.R.	N.R.	4,3E-02	0	9,1E-02	1,8E-01
PERM	MJ	0	0	0		0			0	0	0	0
PERT	MJ	23,4	2,9E-01	1,3		4,9E-01			4,3E-02	0	9,1E-02	1,8E-01
PENRE	MJ	151,3	6,1	7,5		1,2E-01			7,7E-01	0	7,8E-01	7,8E-01
PENRM	MJ	0	0	0		0			0	0	0	0
PENRT	MJ	151,3	6,1	7,5		1,2E-01			7,7E-01	0	7,8E-01	7,8E-01
SM	kg	0	0	0		0			0	0	0	0
RSF	MJ	0	0	0		0			0	0	0	0
NRSF	MJ	0	0	0		0			0	0	0	0
FW	m3	3,1E-02	3,4E-04	2,0E-03		9,4E-03			5,0E-05	0	1,5E-04	-1,2E-03

PERE = Uso de energía primaria renovable excluyendo los recursos de energía primaria renovable utilizada como materia prima; **PERM** = Uso de energía primaria renovable utilizada como materia prima; **PERT** = Uso total de la energía primaria renovable; **PENRE** = Uso de energía primaria no renovable, excluyendo los recursos de energía primaria no renovable utilizada como materia prima; **PENRM** = Uso de la energía primaria no renovable utilizada como materia prima; **PENRT** = Uso total de la energía primaria no renovable; **SM** = Uso de materiales secundarios; **RSF** = Uso de combustibles secundarios renovables; **NRSF** = Uso de combustibles secundarios no renovables; **FW** = Uso neto de recursos de agua corriente. **N.R.** = Módulos No Relevantes

Output flows and residues categories

Parámetros	Unit	A1-A3	A4	A5	B1	B2	B3 - B7	C1	C2	C3	C4	D
HWD	kg	8,3E-07	2,4E-07	5,1E-08	N.R	6,5E-11	N.R	N.R	3,6E-08	0	0	0
NHWD	kg	25,3	8,8E-04	9,2E-01		2,7E-03			1,2E-04	0	3,6	0
RWD	kg	3,6E-03	7,4E-06	2,1E-04		1,3E-06			9,5E-07	0	1,1E-05	1,5E-06
CRU	kg	0	0	0		0			0	0	0	0
MFR	kg	8,3E-03	0	3,1E-01		0			0	8,4	0	0
MER	kg	0	0	0		0			0	0	0	0
EE	MJ	0	0	0		0			0	0	0	0

HWD = Residuos peligrosos eliminados; **NHWD** = Residuos no peligrosos eliminados; **RWD** = Residuos radiactivos eliminados; **CRU** = Componentes para su reutilización; **MFR** = Materiales para el reciclaje; **MER** = Materiales para valorización energética; **EE** = Energía exportada; **N.R.** = Módulos No Relevantes

ANNEX II Declaration of the environmental parameters of the LCA and LCI for the format with maximum impacts

Environmental impacts

Parámetros	Unit	A1-A3	A4	A5	B1	B2	B3-B7	C1	C2	C3	C4	D
GWP	kg CO2 eq	12,8	7,5E-01	1,2	N.R.	3,1E-02	N.R.	N.R.	9,3E-02	0	9,5E-02	-2,1E-01
ODP	kg CFC11 eq	1,6E-09	1,2E-16	4,8E-11		2,1E-08			1,5E-17	0	9,7E-14	-3,4E-09
AP	kg SO2 eq	6,9E-02	4,6E-03	3,4E-03		2,2E-04			6,4E-05	0	5,6E-04	-6,3E-04
EP	kg (PO4)3- eq	1,5E-02	5,4E-04	7,3E-04		5,1E-05			1,1E-05	0	7,6E-05	-9,5E-05
POCP	kg etileno eq	4,5E-03	2,9E-04	2,4E-04		7,3E-05			9,8E-06	0	4,4E-05	-5,4E-05
ADPE	kg Sb eq	1,5E-05	4,8E-08	1,8E-06		1,8E-09			6,8E-09	0	1,0E-08	-5,5E-08
ADPF	MJ	194,1	10,0	10,2		1,7E-01			1,3	0	1,2	-3,4

GWP = Potencial de calentamiento global; **ODP** = Potencial de agotamiento de la capa de ozono estratosférico; **AP** = Potencial de acidificación del suelo y de los recursos de agua; **EP** = Potencial de eutrofización; **POCP** = Potencial de formación de ozono troposférico; **ADPE** = Potencial de agotamiento de recursos abióticos para recursos no fósiles; **ADPF** = Potencial de agotamiento de recursos abióticos para recursos fósiles. N.R. = Módulos No Relevantes

Resources use

Parámetros	Unit	A1-A3	A4	A5	B1	B2	B3-B7	C1	C2	C3	C4	D
PERE	MJ	34,7	4,7E-01	2,1	N.R.	8,1E-01	N.R.	N.R.	7,1E-02	0	1,5E-01	3,0E-01
PERM	MJ	0	0	0		0			0	0	0	0
PERT	MJ	34,7	4,7E-01	2,1		8,1E-01			7,1E-02	0	1,5E-01	3,0E-01
PENRE	MJ	211,0	10,0	11,1		2,0E-01			1,3	0	1,3	1,3
PENRM	MJ	0	0	0		0			0	0	0	0
PENRT	MJ	211,0	10,0	11,1		2,0E-01			1,3	0	1,3	1,3
SM	kg	0	0	0		0			0	0	0	0
RSF	MJ	0	0	0		0			0	0	0	0
NRSF	MJ	0	0	0		0			0	0	0	0
FW	m3	4,2E-02	5,5E-04	3,1E-03		1,5E-02			8,2E-05	0	2,4E-04	-1,9E-03

PERE = Uso de energía primaria renovable excluyendo los recursos de energía primaria renovable utilizada como materia prima; **PERM** = Uso de energía primaria renovable utilizada como materia prima; **PERT** = Uso total de la energía primaria renovable; **PENRE** = Uso de energía primaria no renovable, excluyendo los recursos de energía primaria no renovable utilizada como materia prima; **PENRM** = Uso de la energía primaria no renovable utilizada como materia prima; **PENRT** = Uso total de la energía primaria no renovable; **SM** = Uso de materiales secundarios; **RSF** = Uso de combustibles secundarios renovables; **NRSF** = Uso de combustibles secundarios no renovables; **FW** = Uso neto de recursos de agua corriente. N.R. = Módulos No Relevantes

Output flows and residues categories

Parámetros	Unit	A1-A3	A4	A5	B1	B2	B3 - B7	C1	C2	C3	C4	D
HWD	kg	9,0E-07	3,9E-07	7,0E-08	N.R.	1,1E-10	N.R.	N.R.	5,9E-08	0	0	0
NHWD	kg	41,6	1,5E-03	1,5		4,4E-03			1,9E-04	0	5,9	0
RWD	kg	5,7E-03	1,2E-05	3,4E-04		2,1E-06			1,6E-06	0	1,8E-05	3,0E-06
CRU	kg	0	0	0		0			0	0	0	0
MFR	kg	1,4E-02	0	5,1E-01		0			0	13,8	0	0
MER	kg	0	0	0		0			0	0	0	0
EE	MJ	0	0	0		0			0	0	0	0

HWD = Residuos peligrosos eliminados; **NHWD** = Residuos no peligrosos eliminados; **RWD** = Residuos radiactivos eliminados; **CRU** = Componentes para su reutilización; **MFR** = Materiales para el reciclaje; **MER** = Materiales para valorización energética; **EE** = Energía exportada; **N.R.** = Módulos No Relevantes

References

- [1] EN 17160:2019 Product Category rules for ceramic tiles
- [2] ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations - Principles and procedures
- [3] EN 15804:2012+A1:2014 Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products
- [4] Estudio de Análisis de Ciclo de Vida de Gres porcelánico y azulejo – VIVES Anexo I from report. Erratum N°1 C202428 version 2, March 2021; Instituto de Tecnología Cerámica.
- [5] GaBi v 10 software-system. SpheraSolutions. Compilation 10.0.0.71. More information: <http://www.gabi-software.com>
- [6] GaBi database. Database for Life Cycle Engineering. SpheraSolutions Upgrade 2020 Edition (February 20, 2020 - SP 40). More information: <http://www.gabi-software.com/spain/databases/>
-

Index

1	General information	3
2	Product	4
3	Information regarding the LCA	5
4	System boundaries, scenarios and additional technical information	7
5	Declaration of environmental parameters of the LCA and LCI	13
6	Additional environmental information	14
	Anexo I - Declaration of the environmental parameters of the LCA and LCI for the format with minimum impacts	15
	Anexo II - Declaration of the environmental parameters of the LCA and LCI for the format with maximum impacts	17
	References	19

AENOR



Una declaración ambiental verificada

GlobalEPD

A VERIFIED ENVIRONMENTAL DECLARATION