

GlobalEPD

A VERIFIED ENVIRONMENTAL DECLARATION



Environmental
product
declaration

EN ISO 14025:2010

EN 50693:2019



N1VC7V-K UE 0,6/1 kV

AENOR

Cable Family N1VC7V-K Multipolar


Issue Date: 2025-10-28

Valid to: 2030-10-27

The declared validity is subject to registration and publication on www.aenor.com

Registration code: GlobalEPD EN 50693 - 040

Bruno Baldassari & F.lli S.p.A.



The holder of this Declaration is responsible for its contents and for keeping the records and the documentation that supports data and statements included during the validity period.



Holder of the Declaration

BRUNO BALADASSARI & F.LLI S.P.A.
Viale Europa 118-120
55013 Lammari (LU), Italy

Tel. (+39) 0583 43521
Mail export@baldassari.it
Web www.baldassaricavi.it



Life cycle assessment

LIFE CYCLE ENGINEERING S.P.A..
Via Livorno 60 – Environmental Park,
10144 Torino, Italy

Tel. (+39) XXX
Mail info@lcengineering.eu
Web www.lcengineering.eu.it



Program operator GlobalEPD

AENOR CONFIA, S.A.U
C/ Génova 6
28004 – Madrid,
Spain

Tel. (+34) 902 102 201
mail aenordap@aenor.com
web www.aenor.com

AENOR is a founding member of ECO Platform, the European Association of Environmental Product Declaration Verification Programs

The European standard EN 50693:2019 serves as PCR for this EPD

Independent verification of the declaration and data in accordance with EN ISO 14025:2010

☐ Internal

☒ External

Verification body

AENOR

1. General Information

1.1. The organization

Baldassari Cavi, founded in 1963, is one of the leading manufacturers of low voltage electrical cables, confirming the path taken of constant growth over the years in terms of turnover and production range.

Baldassari Cavi products represent the qualitative excellence achieved through years of research and experimentation, starting from raw materials selected and transformed with the most modern production processes to create cables that exceed all the requirements of the regulations. The quality of the products, which has always been a priority of the company, is recognized nationally and internationally and is confirmed by the numerous approvals obtained over the years.

Baldassari Cavi produces a wide range of cables that can be used for all types of use and works with the most important certification bodies in the cable market such as IMQ, AENOR, LCIE, VDE, CEBC and others.

The company has been ISO 9001 certified since 1996 and ISO 14001 since 2014.

1.2. Scope of the declaration

This declaration describes N1VC7V-K multipolar cable family, manufactured in the plants of the Bruno Baldassari & F.lli company, located in:

- Marlia (Lucca, Italy) for the copper conductor
- Lammari (Lucca, Italy) for the insulation
- Salanetti (Lucca, Italy) for the packaging.

This declaration refers to the year 2023.

Reference rules for product selection

- In the absence of sales data for the inventory reference year, data from years with available sales are used (2024 and 2025).
- Where it is not possible to identify the best-selling product, the selection is based on the best-selling section of the formation with the closest technical and dimensional characteristics.
- If the largest or smallest product has never been sold, quantities are estimated by assuming 1 km of product as the functional unit, with the corresponding weight expressed in tonnes.
- For cables intended for the transmission of electrical energy, the LCA analysis included all configurations with 2, 3, 4, and 5 cores, in order to ensure a comprehensive and detailed assessment of the environmental impacts associated with the different constructions and cross-sections available in the product range.
- For control and signal cables, which are characterized by a high number of cores and limited cross-sections mainly of 1.5 mm² and 2.5 mm², the evaluation focused instead on representative configurations with 7, 16, and 27 cores. This selection reflects the typical structure and functional complexity of this category, allowing for effective coverage of environmental impact variability without the need to analyze every possible combination.

This approach ensures a balance between representativeness, accuracy, and practicality of analysis, in accordance with the principles of standard EN 50693 and the guidelines of the GlobalEPD program by AENOR.

For each selected subfamily, the LCA assessment was conducted on the configurations with the smallest, best-selling, and largest cross-sections.

Therefore, to describe the cable family, the data of the following cables are reported:

Subfamily with two conductors (2x):

- N1VC7V-K 2x6, the representative cable of the subfamily;
- N1VC7V-K 2x1.5, the cable with the smallest cross-section;
- N1VC7V-K 2x95, The cable with the largest section;

Subfamily with three conductors (3x):

- N1VC7V-K 3x1.5, the representative cable of the subfamily and the cable with the smallest cross-section;
- N1VC7V-K 3x240, The cable with the largest cross-section;

Subfamily with four conductors (4x):

- N1VC7V-K 4x1.5 the cable with the smallest cross-section;
- N1VC7V-K 4x6, the representative cable of the subfamily;
- N1VC7V-K 4x25, The cable with the largest cross-section;

Subfamily with five conductors (5x):

- N1VC7V-K 5x1.5, the cable with the smallest cross-section;
- N1VC7V-K 5x6, the representative cable of the subfamily;
- N1VC7V-K 5x25, The cable with the largest cross-section;

Subfamily with seven conductors (7x):

- N1VC7V-K 7x1.5, the cable with the smallest cross-section;
- N1VC7V-K 7x2.5, The representative cable of the subfamily and largest cross-section;

Subfamily with sixteen conductors (16x):

- N1VC7V-K 16x1.5, the cable with the smallest cross-section;
- N1VC7V-K 16x2.5, The representative cable of the subfamily and the cable with the largest cross-section;

Subfamily with twenty seven conductors (27x):

- N1VC7V-K 27x1.5 the representative cable of the subfamily and the cable with the smallest and largest cross-section;

1.3. Lifecycle and compliance.

This EPD has been developed and verified in accordance with EN ISO 14025:2010 and EN 50693:2019 standards and the following Category Rule:

ABOUT CATEGORY RULES PRODUCT	
Title	Product category rules for life cycle assessments of electronic and electrical products and systems
Registration code and version	EN 50693:2019.
Issue Date	March 2020
Compliance	EN 50693:2019
Program Operator	AENOR

This Environmental Statement covers the following life cycle phases:

System limitations. Modules considered

Manufacturing	Raw materials	X
	Raw materials transport	X
	Manufacturing	X
Distribution	Distribution	X
Installation	Installation, process and waste	X
Use	Use	X
	Maintenance	NA
End of life stage	Deinstallation	NA
	Transport	X
	Waste treatment	X
	Waste disposal	X
	Benefits and loads beyond the life cycle	X

*NA: Not Aplicable

This EPD may not be comparable with those developed in other programs or according to different reference documents, in particular it may not be comparable with EPDs not drafted in accordance with the EN 50693:2019.

Similarly, this EPD may not be comparable if the source of the data is different (e.g. databases), if not all relevant modules are included, or if they are not based on the same scenarios.

The comparison of construction products must be carried out on the same function, applying the same functional unit and at the level of the building (or the architectural work or engineering), i.e. including the behavior of the product throughout its life cycle, as well as the specifications of section 6.7.2 of the EN ISO 14025 standard.

2.The product

2.1 Product Identification

The N1VC7V-K family of cables consists of power, signalling and control cable PVC insulated, copper tape screened, with PVC sheath, not propagating fire with reduced corrosive gas emission, with special fire reaction characteristics according to Construction Products Regulation (CPR)

The CPC code is 4634.

The applicable regulations are:

- Construction Products Regulation: EU Reg. 305/11.
- Class in accordance with EN 50575:2014 + A1:2016 and EN 13501-6:2014: Eca
- Build and requirements: XP C 32-321:2014
- Flame spread: NF EN 60332-1-2
- Low Voltage Directive: 2014/35/EU

Formation	Ø <u>approx. conducteur</u>	Épaisseur moyenne isolant	Épaisseur moyenne gaine	Ø <u>approx. production</u>	Poids approx. <u>câble</u>	Résistance électrique max à 20° C	Intensité admissible <u>Portata di corrente</u>	
Formazione	Ø <u>indicativa conduttore</u>	Spessore medio isolante	Spessore medio guaina	Ø <u>indicativa produzione</u>	Peso <u>indicativo cavo</u>	Resistenza elettrica max a 20°C	Sous conduit à l'air <u>In tufo, in aria</u> 30° C	Enterré <u>Interrato</u> 20° C
m ² x mm ²	mm	mm	mm	mm	kg/km	ohm/km	A	A
2 x 1,5	1,6	0,8	1,8	11,8	197	13,3	16,5	19
2 x 2,5	1,9	0,8	1,8	12,8	241	7,98	23	25
2 x 4	2,5	1,0	1,8	15,1	342	4,95	30	33
2 x 6	3,0	1,0	1,8	16,3	416	3,30	38	41
2 x 10	4,0	1,0	1,8	18,6	573	1,91	52	56
2 x 16	5,0	1,0	1,8	21,2	778	1,21	69	73
2 x 25	6,2	1,2	1,8	24,8	1099	0,780	90	94
2 x 35	7,3	1,2	1,8	26,8	1387	0,554	146	136
2 x 50	8,9	1,4	1,8	31,2	1899	0,386	175	168
2 x 70	10,5	1,4	1,9	34,0	2398	0,272	221	207
2 x 95	11,9	1,6	2,0	38,2	3081	0,206	265	245
3 x 1,5	1,6	0,8	1,8	11,9	220	13,3	15	16
3 x 2,5	1,9	0,8	1,8	13,0	274	7,98	20	21
3 x 4	2,5	1,0	1,8	15,4	391	4,95	27	28
3 x 6	3,0	1,0	1,8	16,7	482	3,30	34	35
3 x 10	4,0	1,0	1,8	19,2	679	1,91	46	47
3 x 16	5,0	1,0	1,8	22,0	933	1,21	62	61
3 x 25	6,2	1,2	1,8	25,8	1330	0,780	80	79
3 x 240	19,5	2,2	3,0	64,10	1701	0,0801	398	360
4 x 1,5	1,6	0,8	1,8	12,7	252	13,3	15	16
4 x 2,5	1,9	0,8	1,8	13,9	318	7,98	20	21
4 x 4	2,5	1,0	1,8	16,5	456	4,95	27	28
4 x 6	3,0	1,0	1,8	17,9	576	3,30	34	35
4 x 10	4,0	1,0	1,8	20,7	809	1,91	46	47
4 x 16	5,0	1,0	1,8	23,7	1122	1,21	62	61
4 x 25	6,2	1,2	1,8	28,0	1612	0,780	80	79
5 x 1,5	1,6	0,8	1,8	13,6	288	13,3	15	16
5 x 2,5	1,9	0,8	1,8	14,9	366	7,98	20	21
5 x 4	2,5	1,0	1,8	17,9	531	4,95	27	28
5 x 6	3,0	1,0	1,8	19,5	664	3,30	34	35
5 x 10	4,0	1,0	1,8	22,5	954	1,91	46	47
5 x 16	5,0	1,0	1,8	25,9	1328	1,21	62	61
5 x 25	6,2	1,2	1,8	30,6	1917	0,780	80	79
7 x 1,5	1,6	0,8	1,8	15,3	360	13,3	15	16
10 x 1,5	1,6	0,8	1,8	18,4	488	13,3	15	16
12 x 1,5	1,6	0,8	1,8	19,1	558	13,3	15	16
16 x 1,5	1,6	0,8	1,8	21,0	684	13,3	15	16
19 x 1,5	1,6	0,8	1,8	22,3	769	13,3	15	16
24 x 1,5	1,6	0,8	1,8	25,6	988	13,3	15	16
27 x 1,5	1,6	0,8	1,8	25,5	1042	13,3	15	16
7 x 2,5	1,9	0,8	1,8	17,0	473	7,98	20	21
10 x 2,5	1,9	0,8	1,8	21,2	680	7,98	20	21
12 x 2,5	1,9	0,8	1,8	21,8	768	7,98	20	21
16 x 2,5	1,9	0,8	1,8	23,7	930	7,98	20	21
19 x 2,5	1,9	0,8	1,8	25,0	1035	7,98	20	21
24 x 2,5	1,9	0,8	1,8	28,8	1335	7,98	20	21

2.2 Product Performance

The environmental performance of the cable are shown for 1 km of cable for each module (upstream, core, downstream) and for each stage (Manufacturing, Distribution, Installation, Use and End-of-life) of the life cycle.

The environmental impact indicators are quantified using the characterisation factors and impact assessment methods specified in EN 50693:2019 (Table B.1, Annex B).

The manufacturer declares the following information on the technical specifications of the product:

Product Performance

Cable	2x1,5	2x6	2x95	3x1,5	3x240	4x1,5	4x6	4x25	5x1,5	5x6
Electrical resistance 20°C (ohm/km)	13,3	3,3	0,206	13,3	0,0801	13,3	3,3	0,780	13,3	3,3
Useful life (a)	30	30	30	30	30	30	30	30	30	30
Utilization Percentage	70%	70%	70%	70%	70%	70%	70%	70%	70%	70%
Actual use life (a)	21	21	21	21	21	21	21	21	21	21

Cable	5x25	7x1,5	7x2,5	16x1,5	16x2,5	27x1,5
Electrical resistance 20°C (ohm/km)	0,780	13,3	7,98	13,4	8,06	13,3
Useful life (a)	30	30	30	30	30	30
Utilization Percentage	70%	70%	70%	70%	70%	70%
Actual use life (a)	21	21	21	21	21	21

2.3 Product composition

The composition declared by the manufacturer is as follows:

Product composition

Cable	2x1,5	2x6	2x95	3x1,5	3x240	4x1,5	4x6	4x25	5x1,5	5x6	5x25
Copper	26.5%	33.4%	53%	29.9%	63%	252%	43,2%	54.7%	43,3%	44,3%	56.9%
PVC	73.5%	66,6%	47%	70.1%	37%	68%	56,8%	45.3%	43,5%	55,7%	43.1%
Cable weight (kg/km)	197	416	3081	220	9699	252	576	1612	288	664	1917

Cable	7x1,5	7x2,5	16x1,5	16x2,5	27x1,5
Copper	34,6%	39,3%	37,1%	41,9%	38,7%
PVC	47,6%	42,8%	43,8%	38,8%	42%
Cable weight (kg/km)	360,37	473,3	684,45	930,11	1041,62

3. LCA information

3.1 Life cycle analysis

This environmental statement aims to analyze the environmental impact of N1VC7V-K Multipolar Range® cables.

The life cycle analysis of the cable family was carried out using a special software developed for Bruno Baldassari S.p.A. by the consulting firm LCE, based on the EN ISO 14040:2006/A1:2020 standard, and the EN 50693:2019.

The software is called “Baldassari WebTool”. The version used is the (1.3.1) and it's based on the processes of Ecoinvent 3.10. This software has been verified by AENOR.

This EPD has been developed according to the GlobalEPD program.

3.2 Declared unit

The functional unit used for energy wires and cables is defined as follow:

“To transmit energy expressed for 1A over a distance of 1 km during 30 years and a 70 % use rate in accordance with the relevant standard”

Therefore, this report has been drawn up considering the following parameters for functional unit definition:

- 1km for manufacturing, distribution, and end of life stages,
- 1km and 1 A for the usage stage, as suggested by the norm.

For all the aggregate data has been considered as allocation rule the percentage of production of the specific cable compared to the total production of the company

3.3 Reference Useful Life (RSL)

The useful life of the product has been considered in accordance with the reference as defined in the table given in Appendix 1 of the specific rules for wire cables and accessories (PSR0001-ed.4-EN-2022 11 16), considering that the company produces building cable for residential, tertiary and industrial use (except LAN), therefore a useful life of 30 years with a use of 70% (therefore 21 effective years).

3.4 Allocation criteria

Some parameters have been assigned in proportion to the tons of cable produced compared to the total tons produced.

These parameters are:

- The auxiliary materials used in the production
- Emissions from the manufacturing process
- Internal transport
- The waste produced
- Production waste
- The shipping packaging of the cables.
- Water consumption

3.5 Representativeness, quality and selection of data

For the development of this study, we have taken into account the data quality requirements established by the standards:

- EN 50693:2019
- EN ISO 14040:2006/A1:2020;
- EN ISO 14044:2006/A2:2020;

Global EPD (managed by Aenor) with reference to PCR of PEP Ecopassport: PCR, PSR wire and cables. The software used for LCA calculations is the “Baldassari Webtool” as describes in 3.1.

Primary inventory data was collected through questionnaires filled out and entered into the tool. The entire product covered by this EPD was manufactured in Italy and distributed in Italy.

The Ecoinvent database 3.10 was used for secondary data.

3.6 Quality data evaluation

Data quality can be classified as follows:

- Primary data: quantified value of a process or an activity obtained from a direct measurement, or a calculation based on direct measurements.
- Site-specific data: primary data obtained within the product system.
- Secondary data: data which do not fulfil the requirements for primary data. They can include data from databases and published literature, default emission factors from national inventories, calculated data, estimates or other representative data, validated by competent authorities.

The aspects of accuracy, completeness, representativeness (temporal, geographical, and technological scope) and consistency have been addressed in the data quality analysis.

Background database to model each involved material and energy flow and other data is Ecoinvent 3.10, implemented in SimaPro 9.6.0.1 software. The evaluation of the used process is reported in LCA report.

Further details on data quality are specified in the following paragraphs, per each phase considered.

3.7 Cut-off criteria

Cut-off criteria are used to exclude from the analysis critical aspects which impact is expected to be low or negligible and which primary data are rather hard to collect. In this study the following flows have been included in the cut-off:

- Packaging of raw materials as they are delivered to the manufacturer.
- Temporary packaging for internal transport.
- Wastewater from core processes.
- Considering the wide range of possible installation of the products, as suggested by reference PCR, installation processes are excluded from the system boundaries. Yet, the packaging treatment of the product is considered as a waste flow in this phase.
- Maintenance, Repair, Replacement and Refurbishment are not part of the life cycle of these products. Their contribution to cable life cycle impacts is considered negligible according to technology review provided by cable manufacturers.
- Considering the wide range of possible removal process of these products, the removal process and/or dismantling of cables are excluded from the perimeter.

3.8 Other calculation Criteria and hypotheses

The main assumptions made during the study are detailed below.

- For Ecoinvent processes, the "Cut-off" criterion applies.
- The analysis refers to the complementary national electricity mix, based on the average composition of energy sources used for electricity generation in the country (e.g., share of renewable energy, natural gas, etc.).
- For the consumption and energy mix data related to the cable manufacturing process, the complementary national electricity mix was used. The company has a self-generated energy only for self-consumption. The impact of the energy is:

0,7843 kgCO₂/Kwh

- For the end-of-life scenario of the waste generated at different stages of the life cycle, recycling landfill and incineration percentages have been applied,
- In the use phase, it was held that energy dissipated based on electrical resistance and service life of each Cable according to the following formula:

$$E[\text{J.km}^{-1}] = R[\Omega.\text{km}^{-1}] \times I^2 [\text{A}^2] \times \Delta t [\text{s}]$$

Consumption is expressed in J*km⁻¹, considering that the functional unit is given for 1A and 1km of cable. Electrical resistance is a characteristic of the cable, described in the data sheets. A service life of 30 years is taken into account, and usage ratio of 70%, as indicated on by the SPECIFIC RULES FOR Wires, Cables and Appendix 1 of PEP ecopassport® – PSR.

Energy consumption

Cable	2x1,5	2x6	2x95	3x1,5	3x240	4x1,5	4x6	4x25	5x1,5
Electrical resistance 20°C (ohm/km)	13,3	3,3	0,206	13,3	0,0801	13,3	3,3	0,780	13,3
Useful life (a)	30	30	30	30	30	30	30	30	30
Utilization Percentage	70%	70%	70%	70%	70%	70%	70%	70%	70%
Actual use life (a)	21	21	21	21	21	21	21	21	21
Energy consumption during the use stage expressed in J.km-1	8,8x10 ⁹	2,2x10 ⁹	1,4x10 ⁸	8,8x10 ⁹	5,3x10 ⁷	8,8x10 ⁹	2,2x10 ⁹	5,2x10 ⁸	8,8x10 ⁹

Cable	5x6	5x25	7x1,5	7x2,5	16x1,5	16x2,5	27x1,5
Electrical resistance 20°C (ohm/km)	3,3	0,780	13,3	7,98	13,3	8,06	13,3
Useful life (a)	30	30	30	30	30	30	30
Utilization Percentage	70%	70%	70%	70%	70%	70%	70%
Actual use life (a)	21	21	21	21	21	21	21
Energy consumption during the use stage expressed in J.km-1	2,2x10 ⁹	5,2x10 ⁸	8,8x10 ⁹	5,3x10 ⁹	8,8x10 ⁹	5,3x10 ⁹	8,8x10 ⁹

4. System boundaries, Scenarios and Additional Technical info

4.1 Manufacturing

Raw Materials:


All raw materials used in the production of all cable components were considered. **The total recycled copper content amounts to 12.7%.** The cables in question are manufactured in the factories of Bruno Baldassari & F.lli S.p.A. located in Capannori, in the province of Lucca, Italy.

Raw material transport

The transport of raw materials was calculated based on the distance between the suppliers and the Bruno Baldassari & F.lli S.p.A. plant. Transport was modelled using Ecoinvent datasets for lorries Euro 3–6, according to the vehicle distribution reported by ACI (2023).

Manufacturing

This module includes all the production that takes place within the Bruno Baldassari & F.lli S.p.A. plants, including the use of auxiliary materials, water, natural gas, production waste, which have been considered in proportion to the production of the cables considered. The scheme below shows the main steps inside each plant, where plants 1 is Marlia, plants 2 is Lammari and plants 3 is Salanetti.

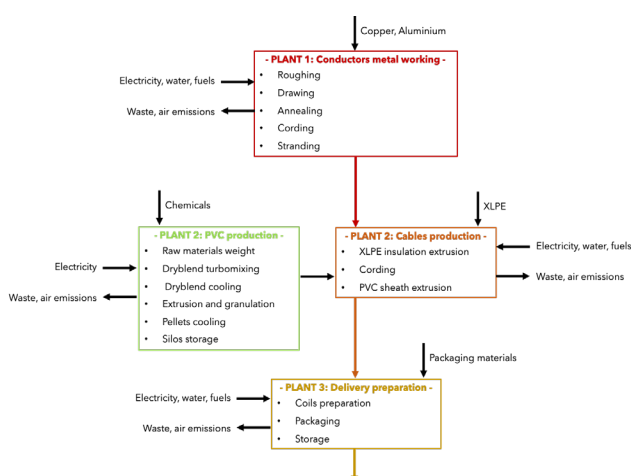

4.2 Distribution

Transport by truck to the cable's reference country, in this case Italy, was considered. We considered an average distance of 400km

4.3 Installation

The installation of the cables was not considered due to the possible different method, but the packaging waste are considered in this phase.

4.4 Use

For the use phase, the energy consumption during the use of the cable that is based on the dissipated energy calculated on the basis of the electrical resistance and the useful life of the product, as specified in point 3.3, with the energy mix of the reference country, in this case Italy.

4.5 End of life stage

The product is highly disassemblable at the end of its life cycle.

After shredding, metallic and plastic components can be mechanically separated. The end of life of the product has been established as follows following the % suggested by the PEP for recovery, recycling, incineration and landfill.

- Everything that is identified as SHEATH: 50% energy recovery, 50% in landfill.
- Everything that is identified as METAL: 60% recycling, 40% landfill (conservative hypothesis of copper, aluminium associated with this hypothesis for simplicity).

In addition, the entire cable is associated with a 50km transport by road with light vehicle and a manual disassembly process.

All the stages in the module are added in a unique result in chapter 5.

4.6 Benefits and burdens beyond the system

This considers the advantages of recycling beyond the boundaries of the system, representing the amount of virgin raw material replaced by recycled raw material, and therefore with a positive impact, but

outside the limits of

the system. To logically evaluate this module, the criteria of the EN 50693 standard are followed, applying the recyclability values recommended by the European Commission. In addition, it is considered a parameter that identifies the quality of the waste leaving as recyclable material on the market.

5. LCA and Environmental Parameters Declaration

Environmental impacts

N1VC7V-K 2X1.5

Estimated impact results are relative and do not indicate the final value of impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-Total	kg CO2 eq	1.104,60	6,41	0,38	795,80	202,06	-233,35
GWP-fossil	kg CO2 eq	1.099,61	6,41	0,28	792,34	202,00	-232,68
GWP-biogenic	kg CO2 eq	3,93	2,17E-04	0,10	3,41	0,03	-0,25
GWP-luluc	kg CO2 eq	1,07	1,56E-04	1,15E-05	0,05	0,03	-0,42
ODP	kg CFC11 eq	6,19E-05	1,30E-07	2,87E-09	1,66E-05	3,01E-07	-3,30E-06
AP	Equalizer of mole H+	50,00	0,02	6,89E-04	2,58	0,18	-2,52
EP-water sweet	kg P eq	0,16	5,34E-06	4,47E-07	0,01	1,25E-03	-0,03
EP-marine	kg N eq	2,15	9,24E-03	3,59E-04	0,40	0,05	-0,40
EP-terrestrial	Mole N eq	29,98	0,10	3,28E-03	4,56	0,51	-5,45
POCP	Kg NMVOC eq	9,58	0,04	1,08E-03	2,11	0,15	-1,35
ADP-Minerals and metals ²	kg Sb eq	0,68	2,10E-07	1,54E-08	1,15E-05	3,18E-06	-0,12
ADP-fossil ²	MJ	16.846,71	84,11	1,93	13.075,44	419,24	-3.105,86
WDP ²	m3	906,56	0,04	-0,21	584,63	9,27	-113,74

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **ADP-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 2X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	1,12E-04	5,38E-07	1,05E-08	1,02E-05	1,53E-06	-1,73E-05
IRP ¹	kBq U235 eq	49,98	0,01	3,45E-04	27,28	1,35	-9,49
ETP-fw ²	CTUe	44.565,35	3,24	1,75	608,09	389,52	-5.851,26
HTP-c ²	CTUh	7,12E-06	4,92E-10	9,75E-11	1,98E-07	2,52E-08	-3,52E-07
HTP-nc ²	CTUh	5,69E-04	5,30E-08	3,75E-09	2,02E-06	6,50E-07	2,20E-06
SQP ²	-	15.689,21	0,19	0,76	1.704,59	52,21	-2.453,89

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Utilization

N1VC7V-K 2X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	2.109,43	0,29	0,01	4.530,97	38,74	-645,84
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	2.164,55	0,29	0,01	4.530,97	38,74	-645,84
PENRE	MJ	15.137,40	84,11	1,93	13.075,44	419,24	-3.105,86
PENRM	MJ	1.709,31	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	16.846,71	84,11	1,93	13.075,44	419,24	-3.105,86
SM	Kg	0,17	0,00	0,00	0,00	0,00	11,39
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	21,93	2,16E-03	-4,66E-03	15,38	0,34	-4,90

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 2X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,04
NHWD	Kg	1,08	0,00	0,02	0,00	93,33	-10,35
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	31,39	0,28
MER	Kg	0,24	0,00	0,00	0,00	72,41	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	
Biogenic carbon content packaging- KgC	Kg C	12,9

Environmental impacts

N1VC7V-K 2X6

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	2.364,84	13,26	0,38	202,57	392,61	-584,73
GWP-fossil	kg CO2 eq	2.351,84	13,26	0,28	201,69	392,48	-583,03
GWP-biogenic	kg CO2 eq	10,30	4,50E-04	0,10	0,87	0,05	-0,63
GWP-luluc	kg CO2 eq	2,70	3,24E-04	1,15E-05	0,01	0,07	-1,07
ODP	kg CFC11 eq	1,15E-04	2,69E-07	2,87E-09	4,22E-06	6,26E-07	-7,52E-06
AP	Mole Equalizer H+	132,17	0,05	6,89E-04	0,66	0,36	-6,67
EP-fresh water	kg P eq	0,42	1,10E-05	4,47E-07	3,43E-03	2,64E-03	-0,07
EP-marine	kg N eq	5,41	0,02	3,59E-04	0,10	0,10	-1,05
EP-terrestrial	Mole N eq	76,44	0,21	3,28E-03	1,16	1,04	-14,45
POCP	Kg NMVOC eq	24,11	0,07	1,08E-03	0,54	0,30	-3,54
ADP-Minerals and metals ²	kg Sb eq	1,81	4,35E-07	1,54E-08	2,93E-06	6,26E-06	-0,32
ADP-fossil ²	MJ	35.043,21	173,97	1,93	3.328,29	881,57	-7.557,49
WDP ²	m3	2.287,22	0,07	-0,21	148,82	18,53	-301,30

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 2X6

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	2,87E-04	1,11E-06	1,05E-08	2,59E-06	3,21E-06	-4,61E-05
IRP ¹	kBq U235 eq	117,11	0,02	3,45E-04	6,94	2,86	-22,24
ETP-fw ²	CTUe	116.989,86	6,70	1,75	154,79	755,42	- 15.670,2 2
HTP-c ²	CTUh	1,89E-05	1,02E-09	9,75E-11	5,05E-08	4,94E-08	-9,35E-07
HTP-nc ²	CTUh	1,52E-03	1,10E-07	3,75E-09	5,15E-07	1,27E-06	6,01E-06
SQP ²	-	40.148,11	0,39	0,76	433,90	109,20	-6.534,30

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Utilization

N1VC7V-K 2X6

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	5.338,98	0,60	0,01	1.153,34	81,82	-1.649,71
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	5.394,10	0,60	0,01	1.153,34	81,82	-1.649,71
PENRE	MJ	31.912,67	173,97	1,93	3.328,29	881,57	-7.557,49
PENRM	MJ	3.130,53	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	35.043,21	173,97	1,93	3.328,29	881,57	-7.557,49
SM	Kg	0,17	0,00	0,00	0,00	0,00	30,56
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	55,32	4,46E-03	-4,66E-03	3,92	0,69	-12,85

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 2X6

Parametro	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,11
NHWD	Kg	1,10	0,00	0,02	0,00	194,64	-27,77
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	84,24	0,74
MER	Kg	0,24	0,00	0,00	0,00	138,48	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	
Biogenic carbon content packaging- KgC	Kg C	21,5

Environmental impacts

N1VC7V-K 2X95

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	22.474,96	98,54	0,38	21,05	2.194,15	-6.188,46
GWP-fossil	kg CO2 eq	22.327,80	98,53	0,28	20,95	2.193,25	-6.169,76
GWP-biogenic	kg CO2 eq	117,83	3,34E-03	0,10	0,09	0,36	-6,88
GWP-luluc	kg CO2 eq	29,32	2,40E-03	1,15E-05	1,32E-03	0,54	-11,82
ODP	kg CFC11 eq	6,62E-04	2,00E-06	2,87E-09	4,38E-07	4,39E-06	-6,67E-05
AP	Mole Equalizer H+	1.529,85	0,34	6,89E-04	0,07	2,55	-76,84
EP-fresh water	kg P eq	4,84	8,20E-05	4,47E-07	3,57E-04	0,02	-0,81
EP-marine	kg N eq	59,98	0,14	3,59E-04	0,01	0,64	-12,13
EP-terrestrial	Mole N eq	857,07	1,55	3,28E-03	0,12	6,96	-166,88
POCP	Kg NMVOC eq	267,70	0,55	1,08E-03	0,06	2,04	-40,30
ADP-Minerals and metals ²	kg Sb eq	21,25	3,23E-06	1,54E-08	3,05E-07	3,66E-05	-3,78
ADP-fossil ²	MJ	310.992,61	1.292,43	1,93	345,80	6.416,24	-76.100,01
WDP ²	m3	25.328,46	0,55	-0,21	15,46	114,89	-3.469,53

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc:** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **ADP-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 2X95

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	3,14E-03	8,26E-06	1,05E-08	2,69E-07	2,31E-05	-5,37E-04
IRP ¹	kBq U235 eq	1.134,26	0,18	3,45E-04	0,72	21,14	-208,61
ETP-fw ²	CTUe	1.333.297,37	49,81	1,75	16,08	4.189,95	- 183.228,02
HTP-c ²	CTUh	2,18E-04	7,56E-09	9,75E-11	5,24E-09	2,84E-07	-1,08E-05
HTP-nc ²	CTUh	0,02	8,15E-07	3,75E-09	5,35E-08	7,31E-06	7,22E-05
SQP ²	-	447.759,30	2,89	0,76	45,08	782,58	-75.799,86

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 2X95

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	59.456,77	4,49	0,01	119,83	602,86	-18.000,44
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	59.511,89	4,49	0,01	119,83	602,86	-18.000,44
PENRE	MJ	295.947,81	1.292,43	1,93	345,80	6.416,24	-76.100,01
PENRM	MJ	15.044,80	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	310.992,61	1.292,43	1,93	345,80	6.416,24	-76.100,01
SM	Kg	0,17	0,00	0,00	0,00	0,00	358,44
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	612,48	0,03	-4,66E-03	0,41	4,31	-145,81

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 2X95

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-1,32
NHWD	Kg	1,26	0,00	0,02	0,00	1.383,44	-325,63
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	987,89	8,68
MER	Kg	0,24	0,00	0,00	0,00	724,85	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	
Biogenic carbon content packaging- KgC	Kg C	6,7

Environmental impacts

N1VC7V-K 3x1.5

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	1.272,56	7,15	0,38	874,72	216,90	-283,82
GWP-fossil	kg CO2 eq	1.266,35	7,15	0,28	870,91	216,83	-283,00
GWP-biogenic	kg CO2 eq	4,91	2,42E-04	0,10	3,75	0,03	-0,31
GWP-luluc	kg CO2 eq	1,31	1,74E-04	1,15E-05	0,05	0,04	-0,51
ODP	kg CFC11 eq	6,82E-05	1,45E-07	2,87E-09	1,82E-05	3,34E-07	-3,83E-06
AP	Mole Equalizer H+	62,67	0,02	6,89E-04	2,84	0,19	-3,15
EP-fresh water	kg P eq	0,20	5,95E-06	4,47E-07	0,01	1,39E-03	-0,03
EP-marine	kg N eq	2,64	0,01	3,59E-04	0,44	0,05	-0,50
EP-terrestre	Talpa N eq	37,01	0,11	3,28E-03	5,01	0,56	-6,83
POCP	Kg NMVOC eq	11,76	0,04	1,08E-03	2,32	0,16	-1,68
ADP-Minerals and metals ²	kg Sb eq	0,85	2,35E-07	1,54E-08	1,27E-05	3,44E-06	-0,15
ADP-fossil ²	MJ	19.274,99	93,75	1,93	14.372,17	467,03	-3.720,50
WDP ²	m3	1.116,42	0,04	-0,21	642,61	10,09	-142,48

GWP - totale: potenziale di riscaldamento globale; **GWP - fossile:** Potenziale di riscaldamento globale dei combustibili fossili; **GWP - biogenico:** Potenziale biogenico di riscaldamento globale; **GWP - luluc** : Potenziale di riscaldamento globale dell'uso del suolo e del cambiamento di uso del suolo; **ODP:** Potenziale di riduzione dell'ozono stratosferico; **AP:** Potenziale di acidificazione, eccedenza accumulata; **EP-acqua dolce:** Potenziale di eutrofizzazione, frazione di nutrienti che raggiungono il comparto finale di acqua dolce; **EP-marine:** Potenziale di eutrofizzazione, frazione di nutrienti che raggiungono il compartimento finale dell'acqua di mare; **EP-terrestre:** potenziale di eutrofizzazione, surplus accumulato; **POCP:** Potenziale di formazione di ozono troposferico; **ADP-minerali e metalli** **Potenziale di esaurimento delle risorse abiotiche per le risorse non fossili;** **APD-fossile:** potenziale di esaurimento delle risorse abiotiche per le risorse fossili; **WDP:** Potenziale di privazione idrica (utente), consumo di deprivazione ponderato per l'acqua. **NR:** Non rilevante

Ulteriori impatti ambientali

N1VC7V-K 3X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	1,37E-04	5,99E-07	1,05E-08	1,12E-05	1,71E-06	-2,17E-05
IRP ¹	kBq U235 eq	59,69	0,01	3,45E-04	29,99	1,51	-11,15
ETP-fw ²	CTUe	55.570,52	3,61	1,75	668,40	417,76	-7.372,82
HTP-c ²	CTUh	8,91E-06	5,49E-10	9,75E-11	2,18E-07	2,72E-08	-4,41E-07
HTP-nc ²	CTUh	7,16E-04	5,91E-08	3,75E-09	2,23E-06	7,00E-07	2,80E-06
SQP ²	-	19.416,77	0,21	0,76	1.873,64	58,02	-3.082,49

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 3X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	2.598,98	0,33	0,01	4.980,33	43,25	-793,50
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	2.654,10	0,33	0,01	4.980,33	43,25	-793,50
PENRE	MJ	17.414,32	93,75	1,93	14.372,17	467,03	-3.720,50
PENRM	MJ	1.860,67	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	19.274,99	93,75	1,93	14.372,17	467,03	-3.720,50
SM	Kg	0,17	0,00	0,00	0,00	0,00	14,37
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	27,00	2,40E-03	-4,66E-03	16,91	0,37	-6,10

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 3X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,05
NHWD	Kg	1,08	0,00	0,02	0,00	103,56	-13,05
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	39,59	0,35
MER	Kg	0,24	0,00	0,00	0,00	77,17	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging - KgC	Kg C	14,76

Environmental impacts

N1VC7V-K 3X240

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	77.570,65	54,35	0,38	5,27	5.740,66	-22.284,51
GWP-fossil	kg CO2 eq	77.029,19	54,34	0,28	5,25	5.737,90	-22.216,48
GWP-biogenic	kg CO2 eq	434,65	1,84E-03	0,10	0,02	1,07	-24,96
GWP-luluc	kg CO2 eq	106,81	1,33E-03	1,15E-05	3,30E-04	1,68	-43,07
ODP	kg CFC11 eq	1,92E-03	1,10E-06	2,87E-09	1,10E-07	1,34E-05	-2,26E-04
AP	Equalizzatore della talpa H+	5.653,21	0,19	6,89E-04	0,02	7,72	-283,57
EP-acqua dolce	kg P eq	17,81	4,52E-05	4,47E-07	8,93E-05	0,06	-3,00
EP-marine	kg N eq	218,87	0,08	3,59E-04	2,64E-03	1,90	-44,73
EP-terrestrial	Talpa N eq	3.138,40	0,86	3,28E-03	0,03	20,54	-616,24
POCP	Kg NMVOC eq	977,20	0,30	1,08E-03	0,01	6,09	-148,20
ADP-Minerals and metals ²	kg Sb eq	78,80	1,78E-06	1,54E-08	7,63E-08	9,93E-05	-14,04
ADP-fossil ²	MJ	1.058.306,72	712,78	1,93	86,56	19.894,6 3	-269.755,37
WDP ²	m3	92.646,60	0,30	-0,21	3,87	324,21	-12.803,03

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 3X240

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	0,01	4,56E-06	1,05E-08	6,74E-08	7,11E-05	-1,99E-03
IRP ¹	kBq U235 eq	4.021,46	0,10	3,45E-04	0,18	66,08	-721,76
ETP-fw ²	CTUe	4.905.189,82	27,47	1,75	4,03	10.896,0 1	-678.951,41
HTP-c ²	CTUh	8,04E-04	4,17E-09	9,75E-11	1,31E-09	7,61E-07	-4,00E-05
HTP-nc ²	CTUh	0,07	4,49E-07	3,75E-09	1,34E-08	1,95E-05	2,69E-04
SQP ²	-	1.643.876,01	1,60	0,76	11,28	2.406,97	-280.273,96

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 3X240

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	217.565,37	2,47	0,01	29,99	1.881,10	-65.415,03
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	217.620,50	2,47	0,01	29,99	1.881,10	-65.415,03
PENRE	MJ	1.019.071,69	712,78	1,93	86,56	19.894,63	-269.755,37
PENRM	MJ	39.235,03	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	1.058.306,72	712,78	1,93	86,56	19.894,63	-269.755,37
SM	Kg	0,17	0,00	0,00	0,00	0,00	1.329,24
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	2.240,11	0,02	-4,66E-03	0,10	12,25	-535,91

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 3X240

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-4,89
NHWD	Kg	1,56	0,00	0,02	0,00	4.236,39	-1.207,57
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	3.663,54	32,19
MER	Kg	0,24	0,00	0,00	0,00	1.794,03	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unità	Profit per reported functional unit
Profit per reported functional unit- KgC	Kg C	
Biogenic carbon content packaging- KgC	Kg C	50,94

Environmental impacts

N1VC7V-K 4X1.5

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-Total	kg CO2 eq	1.420,97	8,11	0,38	874,72	241,54	-340,34
GWP-fossil	kg CO2 eq	1.413,43	8,11	0,28	870,91	241,47	-339,35
GWP-biogenic	kg CO2 eq	5,96	2,75E-04	0,10	3,75	0,03	-0,37
GWP-luluc	kg CO2 eq	1,58	1,98E-04	1,15E-05	0,05	0,04	-0,62
ODP	kg CFC11 eq	7,60E-05	1,64E-07	2,87E-09	1,82E-05	3,79E-07	-4,46E-06
AP	Mole Equalizer H+	76,17	0,03	6,89E-04	2,84	0,22	-3,84
EP-fresh water	kg P eq	0,25	6,75E-06	4,47E-07	0,01	1,59E-03	-0,04
EP-marine	kg N eq	3,15	0,01	3,59E-04	0,44	0,06	-0,61
EP-terrestrial	Mole N eq	44,39	0,13	3,28E-03	5,01	0,63	-8,32
POCP	Kg NMVOC eq	14,03	0,05	1,08E-03	2,32	0,18	-2,04
ADP-Minerals and metals ²	kg Sb eq	1,04	2,66E-07	1,54E-08	1,27E-05	3,84E-06	-0,19
ADP-fossil ²	MJ	21.505,42	106,32	1,93	14.372,17	532,47	-4.424,59
WDP ²	m3	1.337,06	0,05	-0,21	642,61	11,33	-173,50

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 4X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	1,65E-04	6,80E-07	1,05E-08	1,12E-05	1,94E-06	-2,65E-05
IRP ¹	kBq U235 eq	70,55	0,01	3,45E-04	29,99	1,73	-13,12
ETP-fw ²	CTUe	67.468,91	4,10	1,75	668,40	464,96	-9.005,27
HTP-c ²	CTUh	1,08E-05	6,22E-10	9,75E-11	2,18E-07	3,03E-08	-5,38E-07
HTP-nc ²	CTUh	8,75E-04	6,70E-08	3,75E-09	2,23E-06	7,81E-07	3,44E-06
SQP ²	-	23.456,12	0,24	0,76	1.873,64	66,04	-3.759,11

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 4X1.5

Parametro	Unità	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	3.112,86	0,37	0,01	4.980,33	49,37	-956,61
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	3.167,98	0,37	0,01	4.980,33	49,37	-956,61
PENRE	MJ	19.422,49	106,32	1,93	14.372,17	532,47	-4.424,59
PENRM	MJ	2.082,93	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	21.505,42	106,32	1,93	14.372,17	532,47	-4.424,59
SM	Kg	0,17	0,00	0,00	0,00	0,00	17,56
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	32,34	2,73E-03	-4,66E-03	16,91	0,42	-7,41

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 4X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,06
NHWD	Kg	1,08	0,00	0,02	0,00	117,78	-15,95
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	48,39	0,43
MER	Kg	0,24	0,00	0,00	0,00	85,53	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Biogenic carbon content	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging - KgC	Kg C	14,7

Environmental impacts

N1VC7V-K 4X6

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-Total	kg CO2 eq	3.645,87	18,25	0,38	217,04	475,38	-956,03
GWP-fossil	kg CO2 eq	3.623,74	18,25	0,28	216,09	475,21	-953,19
GWP-biogenic	kg CO2 eq	17,62	6,19E-04	0,10	0,93	0,07	-1,05
GWP-luluc	kg CO2 eq	4,50	4,45E-04	1,15E-05	0,01	0,10	-1,79
ODP	kg CFC11 eq	1,51E-04	3,70E-07	2,87E-09	4,52E-06	8,34E-07	-1,12E-05
AP	Mole Equalizer H+	227,29	0,06	6,89E-04	0,70	0,48	-11,44
EP-fresh water	kg P eq	0,72	1,52E-05	4,47E-07	3,68E-03	3,59E-03	-0,12
EP-marine	kg N eq	9,09	0,03	3,59E-04	0,11	0,13	-1,81
EP-terrestrial	Mole N eq	129,17	0,29	3,28E-03	1,24	1,36	-24,81
POCP	Kg NMVOC eq	40,51	0,10	1,08E-03	0,57	0,40	-6,03
ADP-Minerals and metals ²	kg Sb eq	3,14	5,99E-07	1,54E-08	3,14E-06	7,72E-06	-0,56
ADP-fossil ²	MJ	52.843,24	239,39	1,93	3.566,03	1.193,92	-12.026,63
WDP ²	m3	3.851,17	0,10	-0,21	159,44	23,40	-516,46

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc:** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 4X6

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	4,74E-04	1,53E-06	1,05E-08	2,78E-06	4,33E-06	-7,95E-05
IRP ¹	kBq U235 eq	185,76	0,03	3,45E-04	7,44	3,90	-34,09
ETP-fw ²	CTUe	199.314,14	9,23	1,75	165,84	911,97	-27.097,05
HTP-c ²	CTUh	3,23E-05	1,40E-09	9,75E-11	5,41E-08	6,05E-08	-1,61E-06
HTP-nc ²	CTUh	2,64E-03	1,51E-07	3,75E-09	5,52E-07	1,56E-06	1,06E-05
SQP ²	-	67.845,46	0,54	0,76	464,89	146,86	-11.247,86

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 4X6

Parametro	Unità	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	9.001,74	0,83	0,01	1.235,72	111,43	-2.743,21
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	9.056,86	0,83	0,01	1.235,72	111,43	-2.743,21
PENRE	MJ	48.979,97	239,39	1,93	3.566,03	1.193,92	-12.026,63
PENRM	MJ	3.863,28	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	52.843,24	239,39	1,93	3.566,03	1.193,92	-12.026,63
SM	Kg	0,17	0,00	0,00	0,00	0,00	52,94
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	93,14	6,14E-03	-4,66E-03	4,20	0,87	-21,84

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 4X6

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,19
NHWD	Kg	1,10	0,00	0,02	0,00	260,79	-48,10
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	145,91	1,28
MER	Kg	0,24	0,00	0,00	0,00	163,51	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Biogenic carbon content	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging - KgC	Kg C	14,7

Environmental impacts

N1VC7V-K 4X25

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	12.055,75	51,25	0,38	51,30	1.112,61	-3.291,14
GWP-fossil	kg CO2 eq	11.977,03	51,24	0,28	51,08	1.112,14	-3.281,17
GWP-biogenic	kg CO2 eq	63,02	1,74E-03	0,10	0,22	0,19	-3,66
GWP-luluc	kg CO2 eq	15,69	1,25E-03	1,15E-05	3,22E-03	0,28	-6,30
ODP	kg CFC11 eq	3,68E-04	1,04E-06	2,87E-09	1,07E-06	2,27E-06	-3,51E-05
AP	Mole Equalizer H+	817,95	0,17	6,89E-04	0,17	1,32	-41,04
EP-fresh water	kg P eq	2,59	4,27E-05	4,47E-07	8,70E-04	0,01	-0,44
EP-marine	kg N eq	32,10	0,07	3,59E-04	0,03	0,33	-6,48
EP-terrestrial	Talpa N eq	458,48	0,81	3,28E-03	0,29	3,59	-89,13
POCP	Kg NMVOC eq	143,24	0,29	1,08E-03	0,14	1,05	-21,51
ADP-Minerals and metals ²	kg Sb eq	11,36	1,68E-06	1,54E-08	7,43E-07	1,87E-05	-2,02
ADP-fossil ²	MJ	168.136,84	672,13	1,93	842,88	3.331,62	-40.363,86
WDP ²	m3	13.581,55	0,29	-0,21	37,69	58,85	-1.852,93

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 4X25

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	1,66E-03	4,30E-06	1,05E-08	6,57E-07	1,20E-05	-2,87E-04
IRP ¹	kBq U235 eq	610,69	0,09	3,45E-04	1,76	10,99	-110,20
ETP-fw ²	CTUe	711.714,88	25,90	1,75	39,20	2.122,97	-97.925,15
HTP-c ²	CTUh	1,16E-04	3,93E-09	9,75E-11	1,28E-08	1,45E-07	-5,79E-06
HTP-nc ²	CTUh	9,53E-03	4,24E-07	3,75E-09	1,30E-07	3,72E-06	3,86E-05
SQP ²	-	239.664,63	1,50	0,76	109,88	405,86	-40.495,66

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 4X25

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	31.845,07	2,33	0,01	292,08	313,33	-9.587,93
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	31.900,19	2,33	0,01	292,08	313,33	-9.587,93
PENRE	MJ	159.800,69	672,13	1,93	842,88	3.331,62	-40.363,86
PENRM	MJ	8.336,16	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	168.136,84	672,13	1,93	842,88	3.331,62	-40.363,86
SM	Kg	0,17	0,00	0,00	0,00	0,00	191,59
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	328,40	0,02	-4,66E-03	0,99	2,21	-77,82

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 4X25

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,71
NHWD	Kg	1,16	0,00	0,02	0,00	717,01	-174,05
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	528,05	4,64
MER	Kg	0,24	0,00	0,00	0,00	364,98	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	
Biogenic carbon content packaging- KgC	Kg C	19,6

Environmental impacts

N1VC7V-K 5X1.5

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	1.676,37	9,32	0,38	874,72	278,08	-403,17
GWP-fossil	kg CO2 eq	1.667,38	9,32	0,28	870,91	277,99	-402,00
GWP-biogenic	kg CO2 eq	7,10	3,16E-04	0,10	3,75	0,04	-0,44
GWP-luluc	kg CO2 eq	1,88	2,27E-04	1,15E-05	0,05	0,05	-0,74
ODP	kg CFC11 eq	9,08E-05	1,89E-07	2,87E-09	1,82E-05	4,40E-07	-5,24E-06
AP	Mole Equalizer H+	90,81	0,03	6,89E-04	2,84	0,26	-4,58
EP-fresh water	kg P eq	0,29	7,76E-06	4,47E-07	0,01	1,85E-03	-0,05
EP-marine	kg N eq	3,75	0,01	3,59E-04	0,44	0,07	-0,72
EP-terrestre	Talpa N eq	52,84	0,15	3,28E-03	5,01	0,74	-9,91
POCP	Kg NMVOC eq	16,68	0,05	1,08E-03	2,32	0,21	-2,43
ADP-Minerals and metals ²	kg Sb eq	1,24	3,06E-07	1,54E-08	1,27E-05	4,43E-06	-0,22
ADP-fossil ²	MJ	25.376,45	122,23	1,93	14.372,17	618,81	-5.225,51
WDP ²	m3	1.593,93	0,05	-0,21	642,61	13,08	-206,69

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 5X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	1,95E-04	7,82E-07	1,05E-08	1,12E-05	2,26E-06	-3,16E-05
IRP ¹	kBq U235 eq	84,33	0,02	3,45E-04	29,99	2,01	-15,43
ETP-fw ²	CTUe	80.380,84	4,71	1,75	668,40	535,18	-10.739,23
HTP-c ²	CTUh	1,29E-05	7,15E-10	9,75E-11	2,18E-07	3,49E-08	-6,41E-07
HTP-nc ²	CTUh	1,04E-03	7,71E-08	3,75E-09	2,23E-06	9,00E-07	4,11E-06
SQP ²	-	27.909,24	0,27	0,76	1.873,64	76,70	-4.480,41

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 5X1.5

Parametro	Unità	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	3.713,25	0,42	0,01	4.980,33	57,40	-1.135,44
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	3.768,38	0,42	0,01	4.980,33	57,40	-1.135,44
PENRE	MJ	22.931,10	122,23	1,93	14.372,17	618,81	-5.225,51
PENRM	MJ	2.445,35	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	25.376,45	122,23	1,93	14.372,17	618,81	-5.225,51
SM	Kg	0,17	0,00	0,00	0,00	0,00	20,94
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	38,56	3,13E-03	-4,66E-03	16,91	0,49	-8,82

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 5X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,08
NHWD	Kg	1,08	0,00	0,02	0,00	136,75	-19,03
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	57,72	0,51
MER	Kg	0,24	0,00	0,00	0,00	98,27	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Biogenic carbon content
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging- KgC	Kg C	14,7

Environmental impacts

N1VC7V-K 5X6

Estimated impact results are relative and do not indicate the final value of impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-Total	kg CO2 eq	4.402,40	18,23	0,38	217,04	561,57	-1.162,35
GWP-fossil	kg CO2 eq	4.375,42	18,23	0,28	216,09	561,37	-1.158,89
GWP-biogenic	kg CO2 eq	21,50	6,18E-04	0,10	0,93	0,08	-1,28
GWP-luluc	kg CO2 eq	5,49	4,45E-04	1,15E-05	0,01	0,12	-2,18
ODP	kg CFC11 eq	1,81E-04	3,69E-07	2,87E-09	4,52E-06	9,95E-07	-1,35E-05
AP	Equalizer of mole H+	277,44	0,06	6,89E-04	0,70	0,58	-13,96
EP-water sweet	kg P eq	0,88	1,52E-05	4,47E-07	3,68E-03	4,29E-03	-0,15
EP-marine	kg N eq	11,07	0,03	3,59E-04	0,11	0,15	-2,20
EP-terrestrial	Mole N eq	157,43	0,29	3,28E-03	1,24	1,62	-30,28
POCP	Kg NMVOC eq	49,34	0,10	1,08E-03	0,57	0,47	-7,36
ADP-Minerals and metals ²	kg Sb eq	3,84	5,98E-07	1,54E-08	3,14E-06	9,14E-06	-0,68
ADP-fossil ²	MJ	63.794,11	239,14	1,93	3.566,03	1.427,20	-14.589,52
WDP ²	m3	4.694,54	0,10	-0,21	159,44	27,77	-630,26

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 5X6

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	5,76E-04	1,53E-06	1,05E-08	2,78E-06	5,17E-06	-9,71E-05
IRP ¹	kBq U235 eq	225,92	0,03	3,45E-04	7,44	4,67	-41,22
ETP-fw ²	CTUe	243.104,40	9,22	1,75	165,84	1.076,97	-33.089,99
HTP-c ²	CTUh	3,94E-05	1,40E-09	9,75E-11	5,41E-08	7,15E-08	-1,96E-06
HTP-nc ²	CTUh	3,22E-03	1,51E-07	3,75E-09	5,52E-07	1,84E-06	1,29E-05
SQP ²	-	82.672,88	0,54	0,76	464,89	175,43	-13.730,72

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Utilization

N1VC7V-K 5X6

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	10.970,88	0,83	0,01	1.235,72	133,28	-3.339,72
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	11.026,00	0,83	0,01	1.235,72	133,28	-3.339,72
PENRE	MJ	59.178,47	239,14	1,93	3.566,03	1.427,20	-14.589,52
PENRM	MJ	4.615,64	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	63.794,11	239,14	1,93	3.566,03	1.427,20	-14.589,52
SM	Kg	0,17	0,00	0,00	0,00	0,00	64,66
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	113,53	6,13E-03	-4,66E-03	4,20	1,04	-26,64

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstocks; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Waste Categories

N1VC7V-K 5X6

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,24
NHWD	Kg	1,11	0,00	0,02	0,00	311,41	-58,74
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	178,21	1,57
MER	Kg	0,24	0,00	0,00	0,00	192,60	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Recycling Materials; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	
Biogenic carbon content packaging- KgC	Kg C	12,9

Environmental impacts

N1VC7V-K 5X25

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	14.649,63	51,23	0,38	51,30	1.312,17	-4.052,40
GWP-fossil	kg CO2 eq	14.552,39	51,22	0,28	51,08	1.311,61	-4.040,12
GWP-biogenic	kg CO2 eq	77,87	1,74E-03	0,10	0,22	0,22	-4,52
GWP-luluc	kg CO2 eq	19,37	1,25E-03	1,15E-05	3,22E-03	0,34	-7,77
ODP	kg CFC11 eq	4,32E-04	1,04E-06	2,87E-09	1,07E-06	2,73E-06	-4,28E-05
AP	Mole Equalizer H+	1.010,64	0,17	6,89E-04	0,17	1,58	-50,71
EP-fresh water	kg P eq	3,20	4,27E-05	4,47E-07	8,70E-04	0,01	-0,54
EP-marine	kg N eq	39,53	0,07	3,59E-04	0,03	0,40	-8,00
EP-terrestrial	Talpa N eq	565,20	0,81	3,28E-03	0,29	4,29	-110,16
POCP	Kg NMVOC eq	176,70	0,29	1,08E-03	0,14	1,26	-26,57
ADP-Minerals and metals ²	kg Sb eq	14,05	1,68E-06	1,54E-08	7,43E-07	2,21E-05	-2,50
ADP-fossil ²	MJ	204.906,98	671,87	1,93	842,88	4.016,38	-49.585,89
WDP ²	m3	16.792,55	0,29	-0,21	37,69	70,07	-2.289,80

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 5X25

Parametro	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	2,04E-03	4,30E-06	1,05E-08	6,57E-07	1,44E-05	-3,55E-04
IRP ¹	kBq U235 eq	749,88	0,09	3,45E-04	1,76	13,27	-134,91
ETP-fw ²	CTUe	878.545,74	25,89	1,75	39,20	2.501,89	-121.088,40
HTP-c ²	CTUh	1,44E-04	3,93E-09	9,75E-11	1,28E-08	1,71E-07	-7,15E-06
HTP-nc ²	CTUh	0,01	4,24E-07	3,75E-09	1,30E-07	4,39E-06	4,78E-05
SQP ²	-	295.747,44	1,50	0,76	109,88	488,75	-50.058,48

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 5X25

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	39.327,20	2,33	0,01	292,08	378,06	-11.821,64
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	39.382,32	2,33	0,01	292,08	378,06	-11.821,64
PENRE	MJ	194.122,60	671,87	1,93	842,88	4.016,38	-49.585,89
PENRM	MJ	10.784,38	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	204.906,98	671,87	1,93	842,88	4.016,38	-49.585,89
SM	Kg	0,17	0,00	0,00	0,00	0,00	236,94
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	405,34	0,02	-4,66E-03	0,99	2,63	-96,11

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstock; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Categories of waste

N1VC7V-K 5X25

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,87
NHWD	Kg	1,17	0,00	0,02	0,00	862,92	-215,25
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	653,03	5,74
MER	Kg	0,24	0,00	0,00	0,00	427,57	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Material for recycling; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging- KgC	Kg C	19,6

Environmental impacts

N1VC7V-K 7X1.5

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	2.109,59	11,48	0,38	874,72	334,80	-516,01
GWP-fossil	kg CO2 eq	2.098,01	11,48	0,28	870,91	334,69	-514,50
GWP-biogenic	kg CO2 eq	9,17	3,89E-04	0,10	3,75	0,05	-0,56
GWP-luluc	kg CO2 eq	2,41	2,80E-04	1,15E-05	0,05	0,06	-0,95
ODP	kg CFC11 eq	1,07E-04	2,33E-07	2,87E-09	1,82E-05	5,39E-07	-6,56E-06
AP	Mole Equalizer H+	117,58	0,04	6,89E-04	2,84	0,31	-5,92
EP-fresh water	kg P eq	0,38	9,56E-06	4,47E-07	0,01	2,28E-03	-0,06
EP-marine	kg N eq	4,82	0,02	3,59E-04	0,44	0,08	-0,94
EP-terrestrial	Talpa N eq	68,06	0,18	3,28E-03	5,01	0,90	-12,84
POCP	Kg NMVOC eq	21,47	0,06	1,08E-03	2,32	0,26	-3,14
ADP-Minerals and metals ²	kg Sb eq	1,61	3,77E-07	1,54E-08	1,27E-05	5,35E-06	-0,29
ADP-fossil ²	MJ	31.615,91	150,55	1,93	14.372,17	760,63	-6.646,14
WDP ²	m3	2.044,91	0,06	-0,21	642,61	15,87	-267,55

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 7X1.5

Parametro	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	2,51E-04	9,63E-07	1,05E-08	1,12E-05	2,77E-06	-4,10E-05
IRP ¹	kBq U235 eq	105,44	0,02	3,45E-04	29,99	2,47	-19,46
ETP-fw ²	CTUe	103.796,95	5,80	1,75	668,40	644,00	-13.931,83
HTP-c ²	CTUh	1,67E-05	8,81E-10	9,75E-11	2,18E-07	4,21E-08	-8,31E-07
HTP-nc ²	CTUh	1,35E-03	9,49E-08	3,75E-09	2,23E-06	1,09E-06	5,36E-06
SQP ²	-	35.795,47	0,34	0,76	1.873,64	94,15	-5.805,82

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 7X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	4.763,98	0,52	0,01	4.980,33	70,64	-1.459,03
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	4.819,10	0,52	0,01	4.980,33	70,64	-1.459,03
PENRE	MJ	28.744,84	150,55	1,93	14.372,17	760,63	-6.646,14
PENRM	MJ	2.871,07	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	31.615,91	150,55	1,93	14.372,17	760,63	-6.646,14
SM	Kg	0,17	0,00	0,00	0,00	0,00	27,18
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	49,46	3,86E-03	-4,66E-03	16,91	0,59	-11,40

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstock; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Categories of waste

N1VC7V-K 7X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,10
NHWD	Kg	1,09	0,00	0,02	0,00	167,74	-24,69
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	74,91	0,66
MER	Kg	0,24	0,00	0,00	0,00	117,80	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Material for recycling; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging- KgC	Kg C	11,0

Environmental impacts

N1VC7V-K 7X2.5

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	2.955,04	14,49	0,38	524,83	413,24	-747,31
GWP-fossil	kg CO2 eq	2.937,93	14,49	0,28	522,55	413,10	-745,10
GWP-biogenic	kg CO2 eq	13,60	4,91E-04	0,10	2,25	0,06	-0,82
GWP-luluc	kg CO2 eq	3,51	3,54E-04	1,15E-05	0,03	0,08	-1,39
ODP	kg CFC11 eq	1,33E-04	2,94E-07	2,87E-09	1,09E-05	6,99E-07	-9,03E-06
AP	Mole Equalizer H+	175,05	0,05	6,89E-04	1,70	0,41	-8,81
EP-fresh water	kg P eq	0,56	1,21E-05	4,47E-07	8,90E-03	2,99E-03	-0,09
EP-marine	kg N eq	7,08	0,02	3,59E-04	0,26	0,11	-1,39
EP-terrestrial	Talpa N eq	100,27	0,23	3,28E-03	3,01	1,15	-19,10
POCP	Kg NMVOC eq	31,53	0,08	1,08E-03	1,39	0,33	-4,66
ADP-Minerals and metals ²	kg Sb eq	2,41	4,75E-07	1,54E-08	7,60E-06	6,66E-06	-0,43
ADP-fossil ²	MJ	43.442,00	190,08	1,93	8.623,30	995,14	-9.483,47
WDP ²	m3	2.999,63	0,08	-0,21	385,57	20,02	-397,75

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 7X2.5

Parametro	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	3,68E-04	1,22E-06	1,05E-08	6,72E-06	3,61E-06	-6,11E-05
IRP ¹	kBq U235 eq	148,52	0,03	3,45E-04	17,99	3,24	-27,21
ETP-fw ²	CTUe	153.799,91	7,33	1,75	401,04	793,68	-20.812,08
HTP-c ²	CTUh	2,49E-05	1,11E-09	9,75E-11	1,31E-07	5,23E-08	-1,24E-06
HTP-nc ²	CTUh	2,02E-03	1,20E-07	3,75E-09	1,34E-06	1,35E-06	8,07E-06
SQP ²	-	52.617,16	0,43	0,76	1.124,19	122,72	-8.651,12

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 7X2.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	7.001,27	0,66	0,01	2.988,20	92,69	-2.132,83
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	7.056,39	0,66	0,01	2.988,20	92,69	-2.132,83
PENRE	MJ	39.971,05	190,08	1,93	8.623,30	995,14	-9.483,47
PENRM	MJ	3.470,95	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	43.442,00	190,08	1,93	8.623,30	995,14	-9.483,47
SM	Kg	0,17	0,00	0,00	0,00	0,00	40,64
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	72,55	4,87E-03	-4,66E-03	10,14	0,75	-16,86

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstock; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Categories of waste

N1VC7V-K 7X2.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,15
NHWD	Kg	1,10	0,00	0,02	0,00	218,22	-36,92
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	112,01	0,98
MER	Kg	0,24	0,00	0,00	0,00	143,54	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Material for recycling; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging- KgC	Kg C	4,9

Environmental impacts

N1VC7V-K 16X1.5

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	4.082,85	21,90	0,38	881,30	621,92	-1.034,35
GWP-fossil	kg CO2 eq	4.059,42	21,90	0,28	877,46	621,71	-1.031,31
GWP-biogenic	kg CO2 eq	18,59	7,43E-04	0,10	3,78	0,09	-1,13
GWP-luluc	kg CO2 eq	4,84	5,34E-04	1,15E-05	0,06	0,12	-1,91
ODP	kg CFC11 eq	2,01E-04	4,44E-07	2,87E-09	1,84E-05	1,02E-06	-1,28E-05
AP	Mole Equalizer H+	238,77	0,07	6,89E-04	2,86	0,60	-12,03
EP-fresh water	kg P eq	0,77	1,82E-05	4,47E-07	0,01	4,35E-03	-0,13
EP-marine	kg N eq	9,69	0,03	3,59E-04	0,44	0,16	-1,90
EP-terrestrial	Talpa N eq	137,18	0,35	3,28E-03	5,05	1,69	-26,08
POCP	Kg NMVOC eq	43,13	0,12	1,08E-03	2,33	0,49	-6,37
ADP-Minerals and metals ²	kg Sb eq	3,28	7,19E-07	1,54E-08	1,28E-05	9,97E-06	-0,58
ADP-fossil ²	MJ	60.776,15	287,30	1,93	14.480,23	1.451,59	-13.224,91
WDP ²	m3	4.115,82	0,12	-0,21	647,44	29,77	-543,36

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 16X1.5

Parametro	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	5,05E-04	1,84E-06	1,05E-08	1,13E-05	5,28E-06	-8,34E-05
IRP ¹	kBq U235 eq	209,29	0,04	3,45E-04	30,21	4,72	-38,35
ETP-fw ²	CTUe	210.426,15	11,07	1,75	673,42	1.195,45	-28.362,91
HTP-c ²	CTUh	3,39E-05	1,68E-09	9,75E-11	2,20E-07	7,85E-08	-1,69E-06
HTP-nc ²	CTUh	2,76E-03	1,81E-07	3,75E-09	2,24E-06	2,02E-06	1,10E-05
SQP ²	-	72.073,34	0,64	0,76	1.887,73	179,36	-11.804,65

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 16X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	9.596,06	1,00	0,01	5.017,77	134,99	-2.938,24
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	9.651,19	1,00	0,01	5.017,77	134,99	-2.938,24
PENRE	MJ	55.468,13	287,30	1,93	14.480,23	1.451,59	-13.224,91
PENRM	MJ	5.308,02	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	60.776,15	287,30	1,93	14.480,23	1.451,59	-13.224,91
SM	Kg	0,17	0,00	0,00	0,00	0,00	55,36
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	99,56	7,37E-03	-4,66E-03	17,04	1,11	-23,09

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstock; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Categories of waste

N1VC7V-K 16X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,20
NHWD	Kg	1,12	0,00	0,02	0,00	319,27	-50,29
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	152,58	1,34
MER	Kg	0,24	0,00	0,00	0,00	217,55	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Material for recycling; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging- KgC	Kg C	13,5

Environmental impacts

N1VC7V-K 16X2.5

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	5.877,79	29,68	0,38	530,09	788,80	-1.544,43
GWP-fossil	kg CO2 eq	5.842,15	29,67	0,28	527,79	788,52	-1.539,84
GWP-biogenic	kg CO2 eq	28,36	1,01E-03	0,10	2,27	0,12	-1,70
GWP-luluc	kg CO2 eq	7,27	7,24E-04	1,15E-05	0,03	0,16	-2,89
ODP	kg CFC11 eq	2,52E-04	6,01E-07	2,87E-09	1,10E-05	1,37E-06	-1,82E-05
AP	Mole Equalizer H+	365,70	0,10	6,89E-04	1,72	0,80	-18,41
EP-fresh water	kg P eq	1,17	2,47E-05	4,47E-07	8,99E-03	5,89E-03	-0,20
EP-marine	kg N eq	14,64	0,04	3,59E-04	0,27	0,21	-2,91
EP-terrestrial	Talpa N eq	207,96	0,47	3,28E-03	3,04	2,24	-39,94
POCP	Kg NMVOC eq	65,24	0,17	1,08E-03	1,40	0,65	-9,71
ADP-Minerals and metals ²	kg Sb eq	5,05	9,74E-07	1,54E-08	7,68E-06	1,28E-05	-0,90
ADP-fossil ²	MJ	85.845,00	389,22	1,93	8.709,75	1.959,69	-19.469,75
WDP ²	m3	6.215,78	0,17	-0,21	389,43	38,66	-831,34

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 16X2.5

Parametro	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	7,62E-04	2,49E-06	1,05E-08	6,79E-06	7,10E-06	-1,28E-04
IRP ¹	kBq U235 eq	302,49	0,05	3,45E-04	18,17	6,40	-55,35
ETP-fw ²	CTUe	320.804,87	15,00	1,75	405,06	1.513,70	-43.589,25
HTP-c ²	CTUh	5,20E-05	2,28E-09	9,75E-11	1,32E-07	1,00E-07	-2,59E-06
HTP-nc ²	CTUh	4,24E-03	2,45E-07	3,75E-09	1,35E-06	2,58E-06	1,70E-05
SQP ²	-	109.132,60	0,87	0,76	1.135,46	241,20	-18.099,76

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 16X2.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	14.510,34	1,35	0,01	3.018,15	182,81	-4.425,78
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	14.565,46	1,35	0,01	3.018,15	182,81	-4.425,78
PENRE	MJ	79.205,06	389,22	1,93	8.709,75	1.959,69	-19.469,75
PENRM	MJ	6.639,94	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	85.845,00	389,22	1,93	8.709,75	1.959,69	-19.469,75
SM	Kg	0,17	0,00	0,00	0,00	0,00	85,15
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	150,23	9,98E-03	-4,66E-03	10,25	1,44	-35,18

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstock; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Categories of waste

N1VC7V-K 16X2.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,31
NHWD	Kg	1,13	0,00	0,02	0,00	428,48	-77,36
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	234,69	2,06
MER	Kg	0,24	0,00	0,00	0,00	272,02	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Material for recycling; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging- KgC	Kg C	14,7

Environmental impacts

N1VC7V-K 27X1.5

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
GWP-total	kg CO2 eq	6.288,49	33,42	0,38	874,72	917,28	-1.623,27
GWP-fossil	kg CO2 eq	6.251,46	33,41	0,28	870,91	916,97	-1.618,47
GWP-biogenic	kg CO2 eq	29,41	1,13E-03	0,10	3,75	0,13	-1,78
GWP-luluc	kg CO2 eq	7,61	8,15E-04	1,15E-05	0,05	0,18	-3,02
ODP	kg CFC11 eq	2,95E-04	6,77E-07	2,87E-09	1,82E-05	1,54E-06	-1,97E-05
AP	Mole Equalizer H+	378,50	0,11	6,89E-04	2,84	0,90	-19,07
EP-fresh water	kg P eq	1,21	2,78E-05	4,47E-07	0,01	6,57E-03	-0,20
EP-marine	kg N eq	15,27	0,05	3,59E-04	0,44	0,24	-3,01
EP-terrestrial	Talpa N eq	216,46	0,53	3,28E-03	5,01	2,54	-41,35
POCP	Kg NMVOC eq	67,97	0,19	1,08E-03	2,32	0,74	-10,08
ADP-Minerals and metals ²	kg Sb eq	5,22	1,10E-06	1,54E-08	1,27E-05	1,48E-05	-0,93
ADP-fossil ²	MJ	92.942,25	438,27	1,93	14.372,17	2.190,81	-20.638,35
WDP ²	m3	6.480,00	0,19	-0,21	642,61	44,29	-861,14

GWP - total: global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc :** Global warming potential of land use and land use change; **ODP:** Stratospheric Ozone Depletion Potential; **AP:** Acidification potential, accumulated surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients that reach the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final seawater compartment; **EP-terrestrial:** eutrophication potential, accumulated surplus; **POCP:** Ground-level ozone formation potential; **ADP-minerals and metals** Potential for depletion of abiotic resources for non-fossil resources; **APD-fossil:** potential for depletion of abiotic resources for fossil resources; **WDP:** Water deprivation potential (user), weighted deprivation consumption for water. **NR:** Not relevant

Additional environmental impacts

N1VC7V-K 27X1.5

Parametro	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PM	Incidence of diseases	7,95E-04	2,80E-06	1,05E-08	1,12E-05	7,96E-06	-1,32E-04
IRP ¹	kBq U235 eq	323,86	0,06	3,45E-04	29,99	7,14	-59,38
ETP-fw ²	CTUe	332.917,74	16,89	1,75	668,40	1.762,14	-45.032,28
HTP-c ²	CTUh	5,38E-05	2,56E-09	9,75E-11	2,18E-07	1,16E-07	-2,68E-06
HTP-nc ²	CTUh	4,38E-03	2,76E-07	3,75E-09	2,23E-06	2,99E-06	1,74E-05
SQP ²	-	113.569,59	0,98	0,76	1.873,64	270,30	-18.724,76

PM: Potential incidence of diseases due to emissions of particulate matter (PM); IRP : Human potential exposure efficiency relative to U235; ETP-fw : Comparative potential of toxic unit for ecosystems - freshwater; HTP-c : Comparative potential of toxic unit for ecosystems - carcinogenic effects; HTP-nc : Comparative potential of toxic unit for ecosystems non-carcinogenic effects; SQP : Soil quality potential index; NR: Not relevant

Notice 1: This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, of the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some building materials is not measured with this parameter either.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited

Resource Usage

N1VC7V-K 27X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
PERE	MJ	15.112,14	1,52	0,01	4.980,33	203,97	-4.627,37
PERM	MJ	55,12	0,00	0,00	0,00	0,00	0,00
PERT	MJ	15.167,26	1,52	0,01	4.980,33	203,97	-4.627,37
PENRE	MJ	85.211,59	438,27	1,93	14.372,17	2.190,81	-20.638,35
PENRM	MJ	7.730,66	0,00	0,00	0,00	0,00	0,00
PENRT	MJ	92.942,25	438,27	1,93	14.372,17	2.190,81	-20.638,35
SM	Kg	0,17	0,00	0,00	0,00	0,00	87,93
RSF (RSF)	MJ	0,11	0,00	0,00	0,00	0,00	0,00
NRSF	MJ	0,00	0,00	0,00	0,00	0,00	0,00
FW	m3	156,73	0,01	-4,66E-03	16,91	1,65	-36,53

PERE: Use of renewable primary energy, excluding renewable primary energy resources used as feedstock; **PERM:** Use of renewable primary energy used as a feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Use of non-renewable primary energy, excluding non-renewable primary energy resources used as feedstocks; **PENRM:** Use of non-renewable primary energy used as a feedstock; **PENRT:** Total use of non-renewable primary energy; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** use of non-renewable secondary fuels; **FW:** Net use of piped water resources; **NR:** Not relevant

Categories of waste

N1VC7V-K 27X1.5

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
HWD	Kg	0,04	0,00	0,00	0,00	0,00	-0,32
NHWD	Kg	1,15	0,00	0,02	0,00	480,79	-79,88
RWD	Kg	3,84E-07	0,00	0,00	0,00	0,00	0,00

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Output flows

Parameter	Unit	Manufacturing	Distribution	Installation	Use	End of life stage	Benefits
CRU	Kg	0,06	0,00	0,00	0,00	0,00	0,00
MFR	Kg	3,11	0,00	0,12	0,00	242,33	2,13
MER	Kg	0,24	0,00	0,00	0,00	319,23	0,00
USA	MJ	0,00	0,00	0,00	0,00	0,00	0,00

CRU: Components for reuse; **MFRs:** Material for recycling; **MER:** Materials for energy recovery; **EE:** Exported energy; **NR:** Not relevant

Biogenic Carbon Content Information

Biogenic carbon content	Unit	Profit per reported functional unit
Biogenic carbon content product - KgC	Kg C	0
Biogenic carbon content packaging- KgC	Kg C	14,1

References

- (1) General Instructions of GlobalEPD Programme 3rd revision (09-10-2023)
 - (2) EN ISO 14025:2010 Environmental labels. Type III environmental claims. Principles and procedures (ISO 14025:2006).
 - (3) Standard EN 50693:2019 Product category rules for life cycle assessments of electronic and electrical products and systems
 - (4) EN ISO 14040:2006/A1:2020 standard. Environmental management. Life cycle analysis. Principles and framework. 2006.
 - (5) EN ISO 14044:2006/A2:2020 standard. Environmental management. Life cycle analysis. Requirements and guidelines. 2006
 - (6) Functional analysis WebTool manual, version 4, 1.3.1, date 17/09/2025.
 - (7) PCR PEP Ecopassport V4 e PSR-0001 wire and cables.
-

AENOR



GlobalEPD

A VERIFIED ENVIRONMENTAL DECLARATION