

GlobalEPD

A VERIFIED ENVIRONMENTAL DECLARATION



Declaration
Environmental
Product

EN ISO 14025:2010

EN 15804:2012+A2:2020

AENOR

Copper contact wire

EN 1977

Oxygen-Free

Date of first issue:	14 April 2023
Date of modification:	20 December 2024
Date of expiration:	13 April 2028

The declared validity is subject to registration and publication at www.aenor.com

Registration code: GlobalEPD EN15804-031 rev1



Cunext Copper Industries



The holder of this Declaration is responsible for its content, as well as for keeping the supporting documentation that justifies the data and statements included during the period of validity



Holder of the Declaration

Cunext Copper Industries
Avda. de la Fábrica, S/N,
14005 Córdoba,
Spain

Tel. (+34) 957 499 300
Email Rosario_Giron@kunext.com
Web kunext.com



LCA study

Ingeniería de Gestión Sinergy S.L.
Plaza Nueva, 8C. 4.
41001 Seville,
Spain

Tel. (+34) 954 577 998
Email sinergy@sinergy.es
Web sinergy.es



GlobalEPD Programme Manager

AENOR CONFÍA, S.A.U.
C / Génova 6
28004 Madrid,
Spain

Tel. (+34) 902 102 201
Email aenordap@aenor.com
Web www.aenor.com

AENOR is a founding member of ECO Platform, the European Association of Environmental Product Declaration Verification Programmes

RCP EN 15804:2012+A2:2020

Independent verification of the declaration and data in accordance with
EN ISO 14025:2010

Internal

External

Verification body

AENOR

Product certification body accredited by ENAC with accreditation No. 1/C-PR468

1. General information

1.1. The organisation


Grupo Cunext is a leader in the transformation of copper and aluminium of the highest quality, with sustainability, continuous innovation and the development of products that bring greater value to the market at the core of its operations.

Its facilities are located in Spain, in the provinces of Córdoba, Madrid, Barcelona, Zaragoza and Vitoria. It also has an international presence in Italy and the United States.

The copper and aluminium products manufactured by the Cunext Group are always at the top of the quality range, with the company positioning itself as a leading supplier in its sector in Southern Europe and North Africa; being a leading supplier of contact wire, wire and drawn products, ropes and extruded products.

The Cunext Group's facilities have various certifications that endorse the commitment to sustainability adopted in the management of all its processes:

- UNE-EN-ISO 9001:2015. Registration No. ER-0128/1994
- UNE-EN-ISO 14001:2015. Registration No. CA-1998/0084
- European Regulation 1221/2009 (EMAS), Registration No. E-AN-0000006
- UNE-EN-ISO 45001:2018. Registration No. SST-0129/2006
- UNE-EN-ISO 50001:2018. Registration No. GE-2022/0064

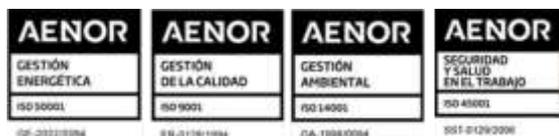

1.2. Scope of the Declaration

This environmental product declaration describes environmental information relating to the life cycle of ALOF copper contact wire produced at the Cunext Copper Industries plant in Córdoba, in the Spanish geographical and technological environment during the year 2021.

Copper contact wire is an intermediate product that is transformed during downstream production processes, mainly into cables and electrical products.

The range of the EPD is cradle-to-gate with options, with modules A1-A3, C and D.

1.3. Life cycle and compliance.

This EPD has been developed and verified in accordance with UNE-EN ISO 14025:2010 and UNE-EN 15804:2012+A2:2020, and includes the following life cycle stages:

Product stage	A1	Supply of raw materials	X
	A2	Transport to the factory	X
	A3	Manufacture	X
Construction	A4	Transport to construction site	MNA
	A5	Installation / construction	MNA
Stage of use	B1	Application	MNA
	B2	Maintenance	MNA
	B3	Repair	MNA
	B4	Replacement	MNA
	B5	Reinstatement	MNA
	B6	In-service energy use	MNA
	B7	In-service water use	MNA
End of life	C1	Deconstruction / demolition	X
	C2	Transport	X
	C3	Waste treatment	X
	C4	Removal	X
	D	Potential for reuse, recovery and/or recycling	X
X = Module included in the LCA; NR = Module not relevant; MNE = Module not evaluated			

Table 1. Information modules considered

This EPD may not be comparable with those developed in other Programmes or according to different reference documents, in particular it may not be comparable with EPDs not developed according to UNE-EN 15804+A2. Similarly, these EPDs may not be comparable if the origin of the data is different (e.g. databases), or not all relevant information modules are included, or they are not based on the same scenarios.

The comparison of construction products must be made on the same function, applying the same functional unit and at the level of the building (or architectural or engineering work), i.e. including the behaviour of the product throughout its life cycle, as well as the specifications of section 6.7.2 of UNE-EN ISO 14025.

1.4. Differences from previous versions of this EPD

This EPD has been modified to include ENAC accreditation

2. The product

2.1. Identification of the product

Oxygen Free Contact Wire (ALOF) is produced exclusively from high-grade electrolytic copper, with 99.99% copper, to ensure highly demanding electrical properties. The molten copper is kept isolated from the atmosphere by means of a graphite layer to prevent oxidation and reduce its oxygen content.

This type of contact wire is suitable for applications requiring high conductivity coupled with exceptional ductility. It is also used in applications where the release of oxygen may cause unwanted chemical reactions with surrounding materials.

The composition and typical characteristics of contact wire are in accordance with EN 1977.

UN CPC code: 4151.

2.2. Features of the product

The manufacturer declares the following information on the technical specifications of the product:

Characteristic	Value	Unit
Diameter	8	mm
Conductivity	> 101	% IACS
Elongation	> 30	%

Table 2. Product characteristics

2.3. Product composition

The composition declared by the manufacturer is as follows:

Substance	Contents	Unit
Copper	99.99	%
Oxygen	< 3	ppm

Table 3. Product composition

The product is presented in rolls of up to 5,000 kg, strapped on wooden pallets and protected by plastic film. The strapping is made of 100% post-consumer recycled polyethylene terephthalate (PET). The film is composed of low density polyethylene (LDPE) with an 80% post-consumer recycled content.

Packaging Material	Contents	Unit
PET Strap	0.12	kg
LDPE film	0.10	kg

Table 4. Packaging material per tonne of product

No substances listed in the Candidate List of Substances of Very High Concern (SVHC) for authorisation, or subject to other regulations, have been used in the manufacture.



3. Information on the LCA

3.1. Life cycle assessment

The Life Cycle Assessment Report that supports this EPD has been developed by Sinergy, based on specific data provided by the Cunext Group for the ALOF contact wire manufacturing process at the Cunext Copper Industries plant in Córdoba, corresponding to the year 2021

As a generic data source, the GaBi V10.6.2.9 software has been used together with the Professional DB 2022 database.

The LCA life cycle assessment has a cradle-to-gate scope with options, including modules A1-A3, C1 to C4 and D.

The LCA includes the stages of mining and processing of the ore, the production of the electrolytic copper, and its use as a raw material in Cunext Copper Industries' smelting and rolling processes for the manufacture of contact wire, as well as its end-of-life.

3.2. Declared unit

The declared unit is defined as **1 tonne** of Oxygen-Free copper contact wire.

3.3. Allocation and cut-off criteria

Where possible, allocation has been avoided. For processes shared with the production of other types of contact wire, where it has not been possible to avoid allocation, allocation rules have been applied based on the mass of the products.

In the quantification of material and energy flows, cut-off criteria in accordance with EN 15804 +A2 have been used. Thus, matter flows of less than 1% of the cumulative mass of inputs and outputs can be excluded, unless their environmental relevance is significant. Similarly, energy flows of less than 1% of the cumulative energy inputs and outputs can be excluded, unless their environmental relevance is significant.

In any case, the sum of the excluded flows does not exceed 5% of the mass, energy or overall environmental impact. The cut-off criterion has not been applied to omit available data with relevant impact.

The data used for the LCA are representative of the copper contact wire production technology at the Cunext Copper Industries plant, as well as the processes included in the scope of the LCA.

Specific data on contact wire production at the Cunext Copper Industries plant covers the full year 2021.

As a generic data source, the GaBi V10.6.2.9 software has been used together with the Professional DB 2022 database. Generic data are representative of a period within the last 10 years.

The data are representative of the production technologies of the reference product, ALOF copper contact wire, at the Cunext Copper Industries plant where it is produced, as well as of the technologies involved in the different stages of the life cycle analysed.

The geographical scope of the data is representative of the operational reality of the different phases of the life cycle analysed.

Following the data quality criteria of the product category rules of the environmental footprint, and considering that the processes are representative of the declared geographical area, that the technological aspects are very similar with no need to modify technical aspects significantly and that the data are less than 3 years old, the level of data quality is considered to be good.

4. System limits, scenarios and additional technical information.

4.1. Pre-manufacturing processes

Module A1 includes the extraction and processing of raw materials.

Copper ore is found in nature in the form of copper sulphides, or in the form of copper oxides, which determines two main process typologies for the production of copper cathodes:

In the hydrometallurgical route, ores with high copper oxide content are extracted and processed for subsequent treatment in the stages of leaching, solvent extraction and cathode production by electrowinning.

Following the pyrometallurgical route, ores with high copper sulphide content are extracted and processed to obtain copper concentrate. The concentrate is transformed through smelting, conversion, refining and casting stages to obtain copper anodes, which are treated in an electrolysis process to produce copper cathodes.

Module A2 includes the raw material transport processes. The primary copper that constitutes the raw material for ALOF contact wire comes from both national and international sources (America, Africa and Europe) and is transported by sea and road to Cunext's facilities.

4.2. Manufacture of the product

Module A3 includes the manufacturing processes, all the way to the factory gate.

Oxygen-free contact wire is produced in the vertical casting section. The cathodes are fed into the furnace and melted in a crucible which is heated by electrical heating elements. The molten copper is kept isolated from the atmosphere to prevent oxidation and to reduce its oxygen content by means of a graphite layer.

The copper is extracted from the top of the furnace through water-cooled supercoolers where it solidifies in the form of contact wire.

The contact wire is then coiled into 5-tonne coils.

4.3. End-of-life stage


For modules C1-C4: the following assumptions and scenarios have been considered.

- In module C1 (deconstruction) the impact of the removal of cables is considered negligible in the context of demolition or dismantling work on the building or civil works.
- For module C2, it is taken into account that copper is transported to a recycling centre, travelling a distance of 1,000 km by road (conservative assumption).
- For module C3, treatment of packaging materials by incineration has been considered.
- It has been taken into account that all the copper in the contact wire is recycled, so there is no impact from copper waste disposal in module C4.

4.4. Benefits and burdens beyond the system

For module D: the following assumptions and scenarios have been taken into account.

- It has been taken into account that no copper waste disposal takes place, and that all copper is sent for recycling. Recycled copper replaces copper produced from virgin raw materials.
- All packaging is sent for incineration with energy recovery.
- The net impacts related to the recycling potential have been calculated by adding the impacts related to the copper recycling processes, and subtracting the impacts of the material it replaces as raw material.
- The net impacts related to the energy recovery potential have been calculated by adding the impacts related to the incineration processes of packaging plastics and subtracting the impacts of the generation of such energy in the national electricity mix

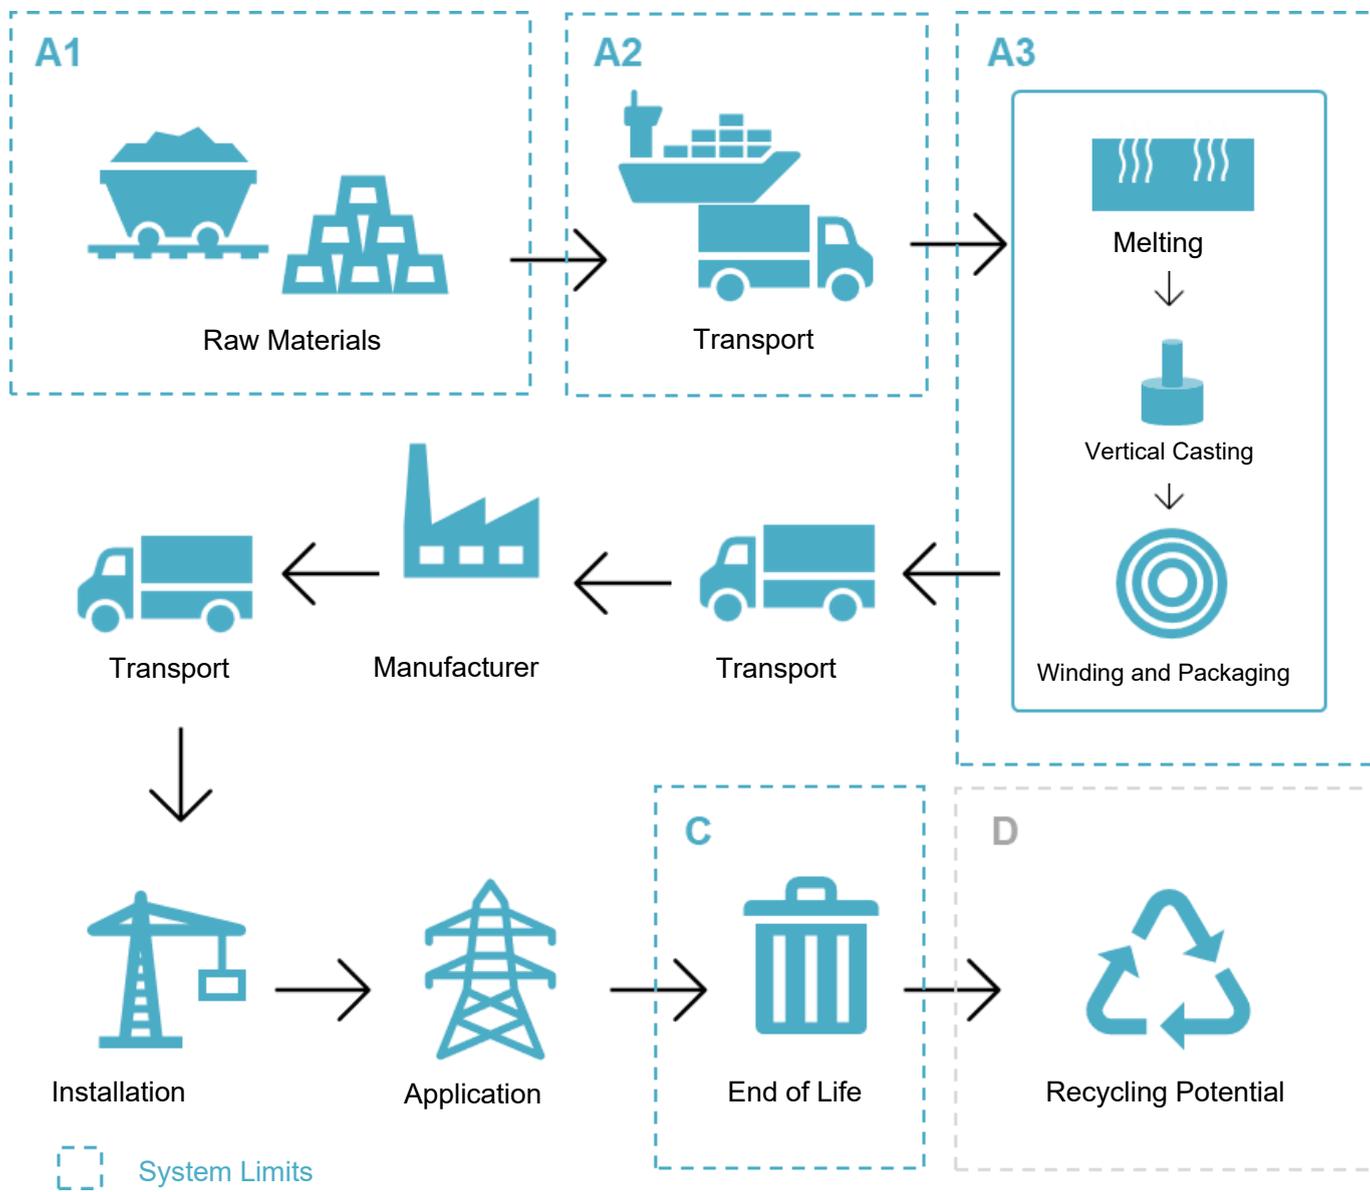

5. LCA and LCI environmental parameter declarations

Environmental impacts.

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks.

Parameter	Units	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-total	kg CO2 eq	4.40E+03	1.85E+01	5.74E+01	4.48E+03	0.0E+00	6.64E+00	5.11E-01	0.0E+00	-2.88E+03
GWP-fossil	kg CO2 eq	4.37E+03	1.85E+01	6.21E+01	4.45E+03	0.0E+00	6.66E+00	5.11E-01	0.0E+00	-2.88E+03
GWP-biogenic	kg CO2 eq	2.56E+01	-1.82E-01	-4.79E+00	2.06E+01	0.0E+00	-6.53E-02	2.25E-05	0.0E+00	1.38E+01
GWP-luluc	kg CO2 eq	7.61E-01	1.25E-01	4.58E-02	9.32E-01	0.0E+00	4.50E-02	7.04E-07	0.0E+00	-1.21E+01
ODP	kg CFC11 eq	6.75E-08	1.83E-12	7.93E-11	6.76E-08	0.0E+00	6.56E-13	2.96E-14	0.0E+00	-1.03E-08
AP	mol H+ eq	6.96E+01	2.14E-02	2.97E-01	6.99E+01	0.0E+00	7.49E-03	4.93E-05	0.0E+00	-5.95E+01
EP-freshwater	kg PO4 eq	1.99E-02	6.64E-05	4.36E-02	6.35E-02	0.0E+00	2.38E-05	6.89E-09	0.0E+00	-6.80E-03
EP-marine	kg N eq	6.76E+00	7.03E-03	8.20E-02	6.85E+00	0.0E+00	2.42E-03	1.38E-05	0.0E+00	-2.92E+00
EP-terrestrial	mol N eq	7.48E+01	8.39E-02	9.59E-01	7.58E+01	0.0E+00	2.89E-02	2.35E-04	0.0E+00	-2.98E+01
POCP	kg NMVOC eq	2.24E+01	1.85E-02	2.28E-01	2.27E+01	0.0E+00	6.45E-03	3.88E-05	0.0E+00	-1.04E+01
ADP-minerals&metals 2	kg Sb eq	2.62E+00	1.87E-06	2.62E-02	2.65E+00	0.0E+00	6.73E-07	7.17E-10	0.0E+00	-2.76E+00
ADP-fossil 2	MJ	5.15E+04	2.44E+02	5.76E+02	5.23E+04	0.0E+00	8.76E+01	8.10E-02	0.0E+00	-2.73E+04
WDP 2	m ³	3.72E+03	2.08E-01	8.43E+01	3.80E+03	0.0E+00	7.47E-02	4.55E-02	0.0E+00	-2.16E+03

GWP - total: Global warming potential; **GWP - fossil:** Global warming potential of fossil fuels; **GWP - biogenic:** Biogenic global warming potential; **GWP - luluc:** Global warming potential of land use and land use change; **ODP:** Stratospheric ozone depletion potential; **AP:** Acidification potential, cumulative surplus; **EP-freshwater:** Eutrophication potential, fraction of nutrients reaching the final freshwater compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching the final marine water compartment; **EP-terrestrial:** Eutrophication potential, cumulative surplus; **POCP:** Tropospheric ozone formation potential; **ADP- minerals&metals 2** Abiotic resource depletion potential for non-fossil resources; **ADP-fossil:** Abiotic resource depletion potential for fossil resources; **WDP:** Water deprivation potential (user), weighted water deprivation consumption. **NR:** Not relevant

Additional environmental impacts

Parameter	Units	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	Incidence of illnesses	1.33E-03	1.45E-07	4.38E-06	1.34E-03	0.0E+00	5.14E-08	2.64E-10	0.0E+00	-4.71E-04
IRP ₁	kBq U235 eq	1.49E+02	6.87E-02	2.54E+00	1.52E+02	0.0E+00	2.47E-02	8.07E-04	0.0E+00	-3.26E+00
ETP-fw ₂	CTUe	3.06E+04	1.73E+02	5.37E+03	3.62E+04	0.0E+00	6.21E+01	3.61E-02	0.0E+00	-3.29E+04
HTP-c ₂	CTUh	1.02E-05	3.56E-09	2.86E-08	1.03E-05	0.0E+00	1.28E-09	2.75E-12	0.0E+00	-1.89E-06
HTP-nc ₂	CTUh	5.91E-04	1.93E-07	1.22E-06	5.92E-04	0.0E+00	6.93E-08	9.30E-11	0.0E+00	-6.41E-05
SQP ₂	-	3.24E+03	1.03E+02	1.34E+03	4.68E+03	0.0E+00	3.71E+01	2.45E-02	0.0E+00	-4.19E+04

PM: Potential incidence of illness due to emissions of particulate matter (PM); **IRP** : Exposure efficiency of human potential relative to U235; **ETP-fw** : Comparative ecosystem toxic unit potential - freshwater; **HTP-c**: Comparative ecosystem toxic unit potential - carcinogenic effects; **HTP-nc**: Comparative ecosystem toxic unit potential - non-carcinogenic effects; **SQP**: Soil quality potential index; **NR**: Not relevant

Notice 1: This impact category deals mainly with the potential impacts of low doses of ionising radiation on human health from the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents and occupational exposure due to the disposal of radioactive waste in underground facilities. The ionising radiation potential of soil, due to radon or some building materials, is also not measured with this parameter.

Notice 2: The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited.

Use of resources

Parameter	Units	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	MJ	6.15E+03	1.69E+01	1.15E+02	6.28E+03	0.0E+00	6.07E+00	1.90E-02	0.0E+00	-9.06E+03
PERM	MJ	0.00E+00	0.00E+00	1.85E+01	1.85E+01	0.0E+00	0.00E+00	0.00E+00	0.0E+00	0.00E+00
PERT	MJ	6.15E+03	1.69E+01	1.33E+02	6.30E+03	0.0E+00	6.07E+00	1.90E-02	0.0E+00	-9.06E+03
PENRE	MJ	5.18E+04	2.45E+02	3.79E+02	5.24E+04	0.0E+00	8.80E+01	8.11E-02	0.0E+00	-2.73E+04
PENRM	MJ	2.39E-08	0.00E+00	1.98E+02	1.98E+02	0.0E+00	0.00E+00	5.96E-16	0.0E+00	0.00E+00
PENRT	MJ	5.18E+04	2.45E+02	5.77E+02	5.26E+04	0.0E+00	8.80E+01	8.11E-02	0.0E+00	-2.73E+04
FW	m ₃	8.48E+01	1.95E-02	8.50E-01	8.57E+01	0.0E+00	7.02E-03	1.07E-03	0.0E+00	-3.57E+01

PERE: Renewable primary energy use excluding renewable primary energy resources used as feedstock; **PERM:** Use of renewable primary energy used as feedstock; **PERT:** Total use of renewable primary energy; **PENRE:** Non-renewable primary energy use, excluding non-renewable primary energy resources used as feedstock; **PENRM:** Use of non-renewable primary energy used as feedstock; **PENRT:** Total non-renewable primary energy use; **SM:** Use of secondary materials; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of flowing water resources; **NR:** Not relevant.

Waste categories

Parameter	Units	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	kg	3.04E-03	1.30E-09	2.18E-08	3.04E-03	0.0E+00	4.66E-10	7.63E-12	0.0E+00	-6.27E-06
NHWD	kg	1.33E+02	3.99E-02	3.68E+00	1.37E+02	0.0E+00	1.43E-02	2.42E-03	0.0E+00	2.12E+03
RWD	kg	1.32E+00	4.55E-04	6.93E-03	1.33E+00	0.0E+00	1.63E-04	4.91E-06	0.0E+00	3.94E-03

HWD: Hazardous waste disposed of; **NHWD:** Non-hazardous waste disposed of; **RWD:** Radioactive waste disposed of; **NR:** Not relevant

Outflows

Parameter	Units	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
CRU	kg	0.0E+00	0.0E+00	0.0E+00						
MFR	kg	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	1.00E+03	0.0E+00	0.0E+00
MER	kg	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	2.23E-01	0.0E+00	0.0E+00
EE	MJ	0.0E+00	0.0E+00	-7.33E-01						

CRU: Components for re-use; MFR: Materials for recycling; MER: Materials for energy recovery; EE: Energy exported; NR: Not relevant

Information on biogenic carbon content

Biogenic carbon content	Units	Result per declared functional unit
Product biogenic carbon content — KgC	kg C	0.0E+00
Biogenic carbon content packaging — KgC	kg C	0.0E+00

References

- [1] General Rules of the GlobalEPD Programme, 2nd revision. AENOR. February 2016
- [2] UNE-EN ISO 14025:2010 Environmental labels. Type III environmental declarations. Principles and procedures (ISO 14025:2006).
- [3] UNE-EN 15804:2012+A2:2020 standard Sustainability in construction. Environmental product declarations. Basic product category rules for construction products
- [4] UNE-EN ISO 14040 standard. Environmental Management. Life Cycle Assessment. Principles and frame of reference. 2006.
- [5] UNE-EN ISO 14044 standard. Environmental Management. Life Cycle Assessment. Requirements and guidelines. 2006
- [6] UNE-EN 1977:2013. Copper and copper alloys. Copper contact wire.
- [7] Copper contact wire LCA Report. Cunext. March 2023. V01.
- [8] International Copper Association (ICA) <https://copperalliance.org/>
- [9] European Copper Institute. <https://copperalliance.org/regional-hubs/europe/clean-and-circular-economy/>

Table of Contents

1. General Information	3
2. The product	4
3. LCA information	5
4. System limits, scenarios and additional technical information	6
5. Declaration of environmental parameters of the LCA and LCI.....	8
References	10

AENOR



A verified environmental declaration

GlobalEPD