



AENOR



ENVIRONMENTAL PRODUCT DECLARATION

PORTLAND CEMENT CLINKER

LA ROBLA FACTORY

Independent verification of the declaration and data,
according to:

EN ISO 14025:2010

EN 15804:2012+A2:2019

Issue date: 30 June 2025

Renewal date: 29 June 2030

Expiration date: 30 June 2030

The declared validity is subject to registration and publication on
www.aenor.com

Registration code: GlobalEPD EN15804-146

The owner of the EPD shall be liable for the underlying life cycle assessment data and evidences.



EPD owner

Cementos Tudela Veguín, S.A.
Fábrica de La Robla

Argüelles, 25. 33003 - Oviedo (Asturias)
ctv@sc.masaveu.com
www.cementostudelaveguin.com



LCA author

Centro de Investigación Elías Masaveu, S.A.

Argüelles, 25, 33033 - Oviedo (Asturias)
www.ciemsa.es



Programme operator

AENOR CONFÍA, S.A.U.

Génova, 6, 28004 - Madrid (Spain)
Tel.: (+34) 902 102 201
aenordap@aenor.com
www.aenor.com

AENOR is a founding member of ECO Platform, the European Association of Environmental Product Declaration Verification Programmes.

Product Category Rule:

The European Standard EN 15804:2012+A2:2019 serves as the basis for PCRs.

Independent verification of the declaration and data, in accordance with the
Standard UNE EN ISO 14025:2010

☐ Internal ☒ External

Third Party verified:



Product certification body is accredited by ENAC with accreditation N°. 1/C-PR468

CONTENTS

1	General information	4
2	Product Information	6
3	LCA Information	8
4	System boundaries, scenarios and additional technical information	9
5	Declaration of environmental LCA and LCI parameters	12
	References	14

1. GENERAL INFORMATION

1.1. The Organization

Cementos Tudela Veguín, S.A. is one of the companies of Masaveu Industria, which operates four plants located in Narón, Tudela Veguín, Aboño and La Robla.

La Robla plant, which is the focus of this EPD, has the following production capacities (in tonnes/year):

- Gray clinker: 1,000,000
- Gray cement: 1,200,000

1.2. Scope of the Environmental Product Declaration

This EPD covers all product stages from cradle to gate (A1-A3) for the year 2024. The system boundaries include all processes from raw material extraction to the production of clinker ready for export at the factory gate.

1.3. Lifecycle and compliance

This EPD has been developed and independently verified in accordance with UNE-EN ISO 14025:2010 and EN 15804:2012+A2:2020.

This Environmental Product Declaration includes the following life cycle stages:

SYSTEM BOUNDARIES. LIFE CYCLE STAGES

PRODUCT STAGE	A1	Raw materials supply	X
	A2	Transport	X
	A3	Manufacturing	X
CONSTRUCTION	A4	Transport	MNA
	A5	Construction installation process	MNA
STAGE OF USE	B1	Use	MNA
	B2	Maintenance	MNA
	B3	Repair	MNA
	B4	Replacement	MNA
	B5	Refurbishment	MNA
	B6	Operation energy use	MNA
	B7	Operational water use	MNA
END OF SERVICE LIFE	C1	De-construction/demolition	MNA
	C2	Transport	MNA
	C3	Waste processing	MNA
	C4	Disposal	MNA
	D	Reuse - Recovery - Recycling potential	MNA

X = Module included in the LCA; NR = Module not relevant; MNA = Module not assessed

This EPD may not be comparable with those developed in other programmes or in accordance with different reference documents, specifically it may not be comparable with EPDs not prepared according to the EN 15804+A2 Standard.

Likewise, this EPD may not be comparable if the data source is different (for example, databases), not all relevant information modules are included, or they are not based on the same scenarios.

The comparison of construction products must be made on the same function, applying the same functional unit and at the level of the building (or architectural or engineering work), i.e. including the behaviour of the product throughout its life cycle, as well as the specifications of section 6.7.2 of UNE-EN ISO 14025.

2. PRODUCT INFORMATION

2.1. Product identification

Clinker is an intermediate product in the manufacture of Portland cement. According to the European Standard EN 197-1, Portland cement clinker (K) is defined as a nodular material produced by heating a carefully prepared mixture of raw materials in a kiln to temperatures above 1,400°C, at which the major components react chemically to form new compounds. This material is then cooled and ground, alone with gypsum or with other components, to produce cement.

Clinker typically consists primarily of calcium silicates and minor amounts of other compounds formed during the high-temperature.

CPC code is 37410.



Portland Cement Clinker

2.2. Technical characteristics

Clinker, as an intermediate product, does not exhibit specific technical characteristics or performance properties on its own. Its relevance lies in its role as the principal constituent in the production of cement. The technical properties and performance of clinker are thus intrinsically linked to the final cement product in which it is incorporated, in accordance with the requirements defined in standards such as EN 197-1.

2.3. Product composition

Portland cement clinker is a hydraulic material that must consist of at least two-thirds by mass of calcium silicates ($[3\text{CaO}\cdot\text{SiO}_2]$ and $[2\text{CaO}\cdot\text{SiO}_2]$), with the remainder made up of clinker phases containing aluminium, iron, and other compounds. The mass ratio of CaO to SiO_2 shall not be less than 2.0, and the magnesium oxide (MgO) content shall not exceed 5.0% by mass.

Clinker typically consists primarily of calcium silicates (alite $[\text{C}_3\text{S}]$ and belite $[\text{C}_2\text{S}]$) and minor amounts of calcium aluminates (C_3A) and calcium aluminoferrites (C_4AF), formed during the high-temperature sintering process. It is characterized by the following typical molar ratios:

- **Silica ratio (SR)** = $\text{SiO}_2 / (\text{Al}_2\text{O}_3 + \text{Fe}_2\text{O}_3)$: typically between 2.0 and 3.0
- **Alumina ratio (AR)** = $\text{Al}_2\text{O}_3 / \text{Fe}_2\text{O}_3$: typically between 1.3 and 2.5

These compositional requirements and ratios ensure the appropriate formation of the main clinker phases and influence the hydraulic reactivity and performance of the resulting cement.

None of the components of the final product are included in the Candidate List of Substances of Very High Concern for Authorization.

3. LCA INFORMATION

3.1. Life cycle analysis

The Life Cycle Assessment (LCA) covers the cradle-to-gate boundary, including modules A1 to A3 (product stage), with reference to the year 2024. The LCA is detailed in its corresponding report, which is complemented by a series of annexes describing specific aspects of the production process.

3.2. Declared unit

The declared unit is **1 tonne (1,000 kg)** of Portland cement clinker .

3.3. Reference service life (RSL)

Cement, and therefore clinker, does not possess a standalone identity and cannot be individually distinguished or separated at the construction site. Therefore, its reference service life is linked to the service life of the structural elements in which is integrated.

3.4. Allocation criteria

When allocation could not be avoided, **mass allocation** was applied. This approach has been used for energy consumption, waste, and emissions to water.

For waste, the '**polluter pays**' principle has been followed. As stated in **Annex D of UNE-EN 16908:2019**, the entity generating the waste is responsible for declaring both the use of the waste and the associated environmental impact in the module where the waste is used.

3.5. Cut-off rules

More than 99% of the materials and energy consumption have been included.

3.6. Representativeness, quality and selection of data

The data used in this EPD are representative of clinker production for the reference year 2024. Site-specific data were collected directly from the manufacturing plant, ensuring high temporal and technological representativeness. The geographical representativeness corresponds to the location of the production site.

Data quality has been evaluated in terms of completeness, consistency, and reliability. All relevant inputs and outputs have been considered, and the data selection ensures conformity with the requirements of EN 15804 and the applicable PCR. Cut-off criteria were applied according to standard rules, and no significant data were excluded.

3.7. Other calculation rules and assumptions

3.7.1. Biogenic carbon content

The declaration of biogenic carbon content is not required, as the biogenic fraction is significantly below the 5% threshold relative to the total product mass, in accordance with the provisions of EN 15804:2012+A2:2019, considering the intrinsic characteristics of the product.

4. SYSTEM BOUNDARIES, SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION

This EPD includes only modules A1-A3, product stage, according to the modular scheme of the EN 15804+A2 standard, and presents the results in an aggregated form.

The life cycle assessment encompasses the following subprocesses of the clinker manufacturing chain:

A1. Raw material supply

The principal raw materials used for clinker production—mainly limestone—are extracted from quarries owned by the company. Depending on availability and formulation targets, externally sourced and alternative raw materials may also be incorporated into the raw mix.

A2. Transport

External raw materials and fuels arrive by truck and are incorporated into the production process.

A3. Manufacturing

PREHOMOGENIZATION

The flow of raw materials, after a crushing process, is stored in the prehomogenization warehouse, where it is positioned in uniform layers ensuring that the mixture has an adequate composition and its variability is reduced.

GRINDING OF RAW MATERIALS

The raw materials are ground to obtain a product of uniform composition and to reduce its size in order to facilitate calcination in the kiln. This grinding is carried out using a mill.

CALCINATION

The kiln is fed through a cyclone preheater, which heats the ground raw material with exhaust gases from the kiln and with a contribution of fossil and/or alternative fuels.

CLINKERIZATION

The ground raw material advances through the rotary kiln, where temperatures, above 1,400 °C are reached, giving rise to the clinker sintering process. To reach these temperatures, it is necessary, as in calcination, to consume fuels that, again, can be fossil and/or alternative.


COOLING

Upon leaving the kiln, the clinker is introduced into the cooler, which injects cold air to reduce its temperature and set the desired mineralogical composition.

PRODUCT STORAGE


Cement is stored in silos for future shipment.

PRODUCT STAGE

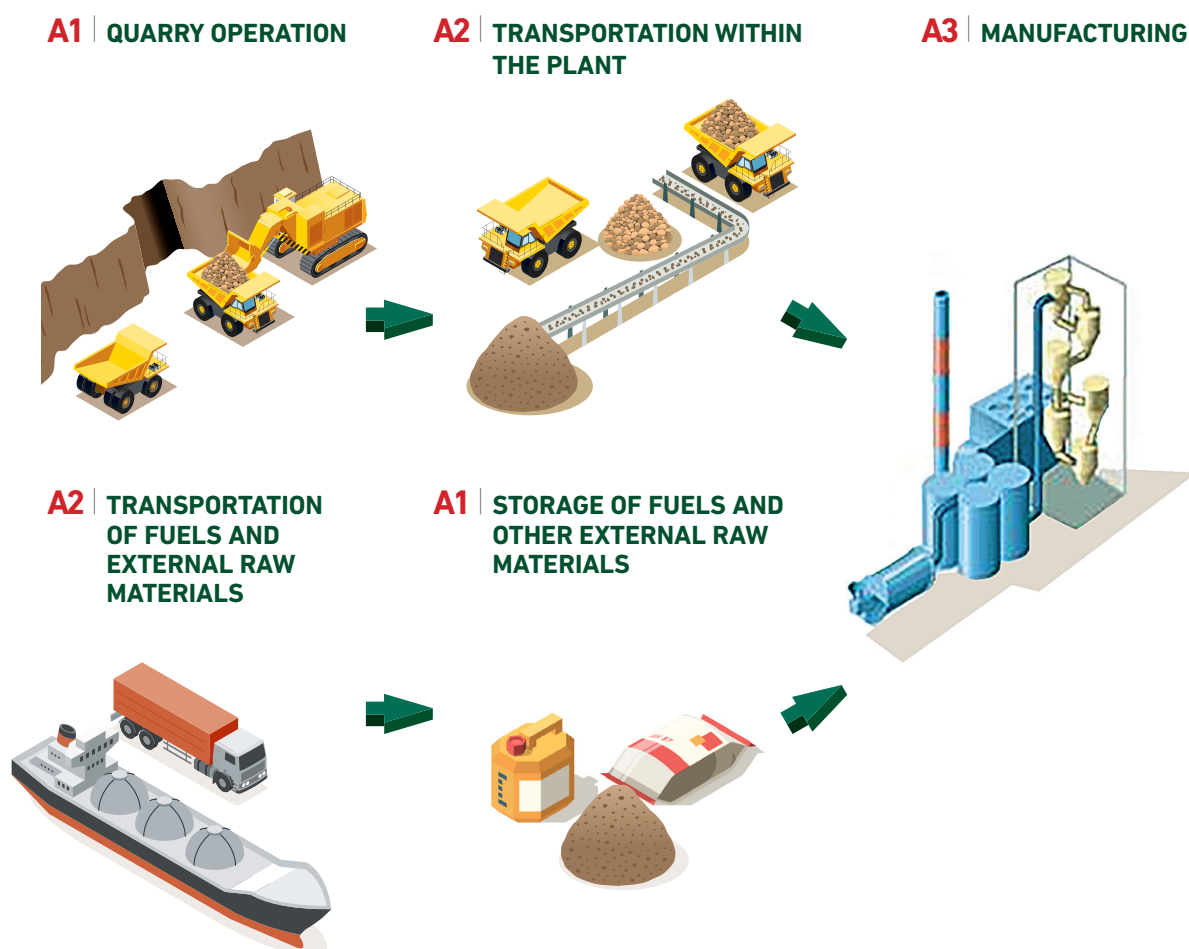

- A1** RAW MATERIAL SUPPLY
- A2** TRANSPORT
- A3** MANUFACTURING

A3 | STEPS IN CLINKER MANUFACTURING

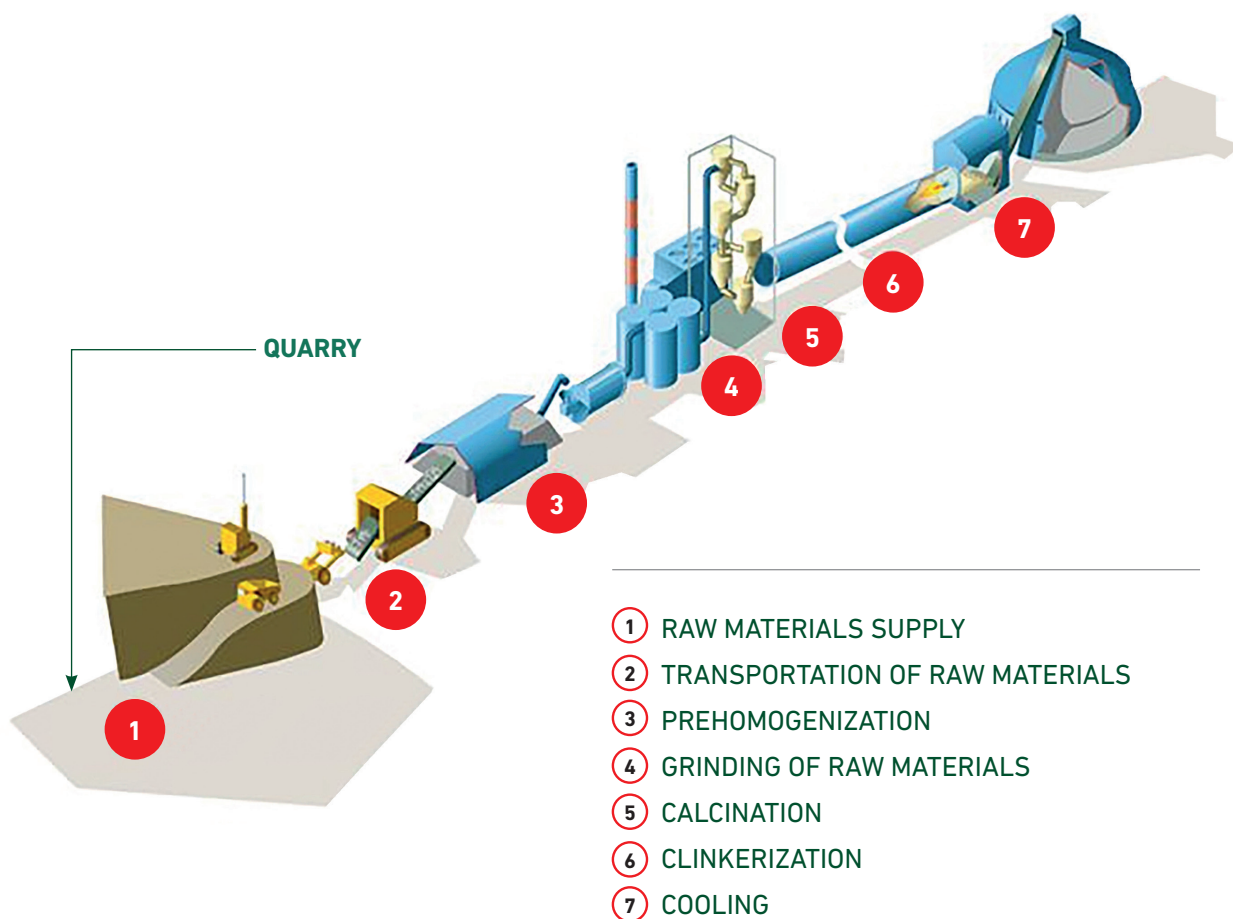

5. DECLARATION OF ENVIRONMENTAL LCA AND LCI PARAMETERS

ENVIRONMENTAL IMPACTS

IMPACT CATEGORY	UNITS	A1-A3
GWP- total	kg CO ₂ -equivalent	7.00E+02
GWP- fossil	kg CO ₂ -equivalent	6.98E+02
GWP- biogenic	kg CO ₂ -equivalent	1.48E+00
GWP- lu&luc	kg CO ₂ -equivalent	1.30E-02
ODP	kg CFC ₁₁ -equivalent	2.93E-06
AP	mol H ⁺ _{equivalent}	4.47E-01
EP- freshwater	kg P _{equivalent}	1.55E-03
EP- marine	kg N _{equivalent}	4.03E-01
EP- terrestrial	mol N _{equivalent}	1.72E+00
POCP	kg NMVOC _{equivalent}	1.07E+00
ADP - minerals & metals ⁽¹⁾	kg Sb _{equivalent}	2.85E-05
ADP - fossil ⁽¹⁾	MJ	2.71E+03
WDP ⁽¹⁾	m ³	3.80E+01

The value of GWP-gross, which includes the greenhouse emissions from the incineration of secondary fuels at clinker production is 7,97E+02 kg CO₂-equivalent

GWP - total: Global warming potential total

GWP - fossil: Global warming potential fossil

GWP - biogenic: Global warming potential biogenic

GWP - lu&luc: Global warming potential of land use and land use change

ODP: Depletion potential of the stratospheric ozone layer

AP: Acidification potential, accumulated exceedance

EP - freshwater: Eutrophication potential, fraction of nutrients reaching freshwater end compartment

EP - marine: Eutrophication potential, fraction of nutrients reaching marine end compartment

EP - terrestrial: Eutrophication potential, accumulated exceedance

POCP: Formation potential of tropospheric ozone

ADP - minerals & metals: Abiotic depletion potential for non-fossil resources

ADP - fossil: Abiotic depletion potential for fossil resources

WDP: Water (user) deprivation potential, deprivation weighted water consumption

The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks.

(1) The results of this environmental impact indicator shall be used with caution, since the uncertainties of the results are high and there is limited experience with the indicator.

ADDITIONAL ENVIRONMENTAL IMPACTS

IMPACT CATEGORY	UNITS	A1-A3
PM	Disease incidence	6.89E-06
IRP ⁽²⁾	kBq U235 _{equivalent}	9.96E+00
ETP-fw ⁽¹⁾	CTUe	7.53E+02
HTP-c ⁽¹⁾	CTUh	1.46E-08
HTP-nc ⁽¹⁾	CTUh	1.54E-06
SQP ⁽¹⁾	Pt	5.46E+01

PM: Potential for disease incidence due to particulate matter emissions

IRP: Human potential exposure efficiency relative to U235

ETP-fw: Comparative potential toxic unit for humans - freshwater

HTP-c: Comparative potential toxic unit for humans - carcinogenic effects

HTP-nc: Comparative potential toxic unit for humans - non-carcinogenic effects

SQP: Soil quality potential index

PARAMETERS DESCRIBING RESOURCE USE

PARAMETER	UNITS	A1-A3
PERE	MJ	4.14E+01
PERM	MJ	0.00E+00
PERT	MJ	4.14E+01
PENRE	MJ	2.71E+03
PENRM	MJ	0.00E+00
PENRT	MJ	2.71E+03
SM	kg	6.36E+02
FW	m ³	0.00E+00

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials

PERM: Use of renewable primary energy used as raw material

PERT: Total use of primary renewable energy

PENRE: Use of non-renewable primary energy, excluding non-renewable primary energy resources used as raw materials

PENRM: Use of non-renewable primary energy used as raw material

PENRT: Total use of primary non-renewable energy

SM: Use of secondary materials

FW: Net use of running water resources

(1) The results of this environmental impact indicator shall be used with caution, since the uncertainties of the results are high and there is limited experience with the indicator.

(2) This impact category deals mainly with the eventual impacts of low doses of ionizing radiation on human health, from the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The potential for ionizing radiation of the soil, due to radon or some construction materials, is not measured in this parameter either.

WASTE CATEGORIES

PARAMETER	UNITS	A1-A3
HWD	kg	1.42E-02
NHWD	kg	1.59E+00
RWD	kg	6.37E-03

HWD: Hazardous waste disposed
NHWD: Non-hazardous waste disposed
RWD: Radioactive waste disposed

OUTPUT FLOWS

PARAMETER	UNITS	A1-A3
CRU	kg	0.00E+00
MFR	kg	1.62E-02
MER	kg	0.00E+00
EE	MJ	0.00E+00

CRU: Components for re-use
MFR: Materials for recycling
MER: Materials for energy recovery
EE: Exported energy

BIOGENIC CARBON CONTENT

PARAMETER	UNITS	A1-A3
Biogenic carbon content of product	kg C	0.00E+00

REFERENCES

- LCA Report Portland cement clinker. Version V1.2. July 2025.
- General Rules of the GlobalEPD Program, 3rd revision. AENOR. October 2023.
- UNE-EN ISO 14025:2010 Environmental labels. Type III environmental declarations. Principles and procedures (ISO 14025:2006).
- EN 15804:2012+A2:2019 Sustainability in construction. Environmental product declarations. Basic product category rules for construction products.
- UNE-EN ISO 14040 Environmental Management. Life cycle analysis. Principles and frame of reference. 2006.
- UNE-EN ISO 14044 Environmental Management. Life cycle analysis. Requirements and guidelines. 2006.
- UNE-EN 197-1: 2011 Cement. Part 1.
- UNE-EN 15171:1:2006 Granulated ground blast furnace slag for use in concrete, mortars and pastes. Part 1: Definitions, specifications and conformance criteria.
- UNE-EN 16908:2019+A1:2022 Construction cements and limes. Environmental product declarations. Product category rules complementary to Standard EN 15804.
- Commission Delegated Regulation (EU) 2021/21 39 of 4 June 2021. Technical selection criteria to determine the conditions under which an economic activity is considered to contribute substantially to the mitigation of climate change or to adaptation to it.

MASAVEU ● INDUSTRIA



Global**EPD**
A VERIFIED ENVIRONMENTAL DECLARATION



AENOR

M
CEMENTOS
TUDELA VEGUÍN

Argüelles, 25, 33003 Oviedo, Asturias
T. 985 98 11 00

www.cementostudelaveguin.com