

Hot-rolled reinforcing bars and coils

from the electric arc furnace of Megasa Siderúrgica plant (Narón)

EN ISO 14025:2010

EN 15804:2012+A2:2019/AC:2021

UNE 36904-1:2018

Issue date:
2025-12-19

The declared validity is subject to registration and publication at www.aenor.com

Registration code:
GlobalEPD 001-028-rev1

Revision date:
2026-01-30

Expiry date:
2030-12-18



GlobalEPD
A VERIFIED ENVIRONMENTAL DECLARATION

ECO PLATFORM
EPD
VERIFIED

AENOR

INDEX

1 General information p.4

- 1.1. The organisation p.4
- 1.2. Scope of the Declaration p.4
- 1.3. Life cycle and compliance p.4
- 1.4. Differences from previous versions of this EPD p.5

2 The product p.6

- 2.1. Product identification p.6
- 2.2. Product composition p.6
- 2.3. Packaging p.7
- 2.4. Regulations applicable to the product p.7

3 Information on LCA p.8

- 3.1. Life cycle analysis p.8
- 3.2. Scope of the study p.8
- 3.3. Declared unit p.8
- 3.4. Allocation criteria p.8
- 3.5. Cut-off rule p.8
- 3.6. Manufacturing process diagram p.9
- 3.7. Representativeness, quality and selection of data p.10

4 System limitations, scenarios and additional technical information p.11

5 Declaration of LCA and LCI environmental parameters p.15

6 Additional environmental information p.19

- 6.1. Other indicators p.19
- 6.2. Indoor air emissions p.19
- 6.3. Emissions to soil and water p.19
- 6.4. Biogenic carbon content p.19
- 6.5. Electricity mix used p.19

7 References p.22

The holder of this Declaration is responsible for its content, as well as for keeping the supporting documentation that justifies the data and statements included in it for the duration of its validity.

AENOR is a founding member of ECO Platform, the European Association of Environmental Product Declaration Verification Programmes.



Holder of the Declaration

Megasa Siderúrgica S.L.
Carretera de Castilla, 802-820 - 15570
Narón Spain

 +34 981 399 000
 info@megasa.com
 www.megasa.com



LCA study

Abaleo S.L.
D. José Luis Canga Cabañas.
c/ Poza de la Sal, 8; 3º A.
28031 Madrid, Spain

 (+34) 639 901 043
 jl.canga@abaleo.es /
info@abaleo.es
 www.abaleo.es



GlobalEPD Programme Administrator

AENOR CONFÍA, S.A.U.
C/ Génova 6
28004 Madrid
Spain

 (+34) 902 102 201
 aenordap@aenor.com
 www.aenor.com

AENOR is a founding member of ECO Platform, the European Association of Environmental Product Declaration Verification Programmes.

Independent verification of the declaration and data, in accordance with Standard EN ISO 14025:2010

Internal External

Verification body:



Product certification body accredited by ENAC with accreditation No. 1/C-PR468

1

GENERAL INFORMATION

1.1. The organisation

GRUPO MEGASA is a family-owned company specialising in the production and distribution of long steel products. The group has more than a thousand employees, spread across its various production plants and distribution units in the Iberian Peninsula and France.

With an installed capacity of over three million tonnes, MEGA-SA uses electric arc furnaces to produce a wide range of long steel products: reinforcing bars and coils, wire rod, welded mesh, and merchant bars and coils.

Megasa Siderúrgica, S.L., founded in 1953, is located in Narón, in the north-west of the province of A Coruña (Spain), in a strategic geographical position just 9 km from the port of Ferrol. It produces reinforcing bar and coils in a wide range of grades.



1.2. Scope of the Declaration

This environmental product declaration describes the environmental information relating to the cradle-to-gate life cycle with options, modules C1-C4 and module D (A1-A3 + A4 + C + D) of reinforcing bars and coils from an electric arc furnace manufactured by Megasa Siderúrgica, S.L.

1.3. Life cycle and compliance

This EPD has been developed and verified in accordance with Standards UNE-EN ISO 14025:2010 and EN 15804:2012+A2:2019/AC:2021 and UNE 36904-1:2018.

Steel industry. Environmental product declarations. Product category rules. Steel products for structures. Part 1: Basic products.

› Megasa Siderúrgica, S.L.

Carretera de Castilla, 802-820 - 15570 Narón (Spain).

Registration/version UNE 36904-1

Date of issue 2018

Administrator AENOR

The function performed by the product system studied is the production of steel for use as a structural element in the construction sector.

System boundaries. Information modules considered			
Product stage	A1	Supply of raw materials	X
	A2	Transport to factory	X
	A3	Manufacturing	X
Construction	A4	Transport to site	X
	A5	Installation/construction	ND
Stage of use	B1	Use	ND
	B2	Maintenance	ND
	B3	Repair	ND
	B4	Replacement	ND
	B5	Rehabilitation	ND
	B6	Energy use in service	ND
	B7	Water consumption during operation	ND
End of life	C1	Deconstruction/demolition	X
	C2	Transport	X
	C3	Waste treatment	X
	C4	Disposal	X
	D	Potential for reuse, recovery and/or recycling	X

X = Module included in the LCA; **ND** = Module not declared

This EPD may not compare with those developed in other programmes or in accordance with different reference documents; specifically, it may not compare with declarations not developed and verified in accordance with Standard EN 15804.

Similarly, EPDs may not compare if the source of the data is different (e.g. databases), not all relevant information modules are included, or they are not based on the same scenarios.

The comparison of construction products must be made on the same function, applying the same declared unit and at the level of the building (or architectural or engineering work), i.e. including the behaviour of the product throughout its life cycle, as well as the specifications of section 6.7.2 of Standard EN ISO 14025.

1.4. Differences from previous versions of this EPD

Revision 1 of this EPD has been issued to change the format and to correct some errors in the text.

2

THE PRODUCT

2.1. Product identification

This LCA applies to hot-rolled reinforcing bars and coils for construction produced in an electric arc furnace.

MEGASA SIDERÚRGICA manufactures high-ductility steel and special-ductility steel, the latter being specially designed for structures subject to seismic stress, providing greater safety against brittle fractures.

Reinforcing steel, together with concrete, constitutes reinforced concrete, which is the most widely used construction element in Spain and many other countries.

This product is supplied in diameters from 8 to 32 mm in bars and 6 to 16 mm in coils. The intended use of the product is as a structural element in the construction sector.

CPC code: 4124 – Bars and wire rod, hot-rolled, of iron or steel.

2.2. Product composition

The following average composition of the product studied is declared:

Material	% by weight
Post-consumer scrap	82.71%
Pre-consumer scrap	17.29%

During the product's life cycle, no hazardous substances listed in the "Candidate List of Substances of Very High Concern (SVHC) for authorisation" are used in a percentage greater than 0.1% of the product's weight.

2.3. Packaging

The primary packaging used to ship the product (distribution packaging) has been included in the study:

Material	kg/unit declared	Material	kg/unit declared
Labels	9.37E-04	Metal hooks	2.83E-03
Wooden bars	5.92E-02	Plastic packaging	3.58E-04
Binding wire	1.43E+00		

2.4. Regulations applicable to the product

The chemical composition and other properties are established in the various applicable product standards:

Regulations - Rebar	
UNE 36068	Weldable reinforcing steel for structural use in reinforced concrete reinforcement
UNE 36065	Weldable reinforcing steel with special ductility characteristics for reinforced concrete reinforcement
BS 4449	Steel for the reinforcement of concrete. Weldable reinforcing steel. Bar, coil and decoiled product. Specification
EN 10080	Steel for the reinforcement of concrete. Weldable reinforcing steel. General
EN 1992-1-1	Eurocode 2 part 3.2 and appendix C
DIN 488	Reinforcing steel – Reinforcing steel bars.
NF A35-080	Steels for reinforced concrete – Weldable steels – Part 1: Bars and coils
LNEC E449	A400NR steel bars for reinforced concrete reinforcement
LNEC E450	A500NR steel bars for reinforced concrete reinforcement
LNEC E455	A400NR steel rods with special ductility for reinforced concrete reinforcement
LNEC E460	A500NR special ductility steel bars for reinforced concrete reinforcement
ASTM A615/615M	Standard specification for deformed and plain carbon steel bars for concrete reinforcement
ASTM A706/706M	Standard specification for deformed and plain low-alloy steel bars for concrete reinforcement
BRL0501 + NEN 6008	Steel for reinforcement of concrete
EN 10080 + SS 212540	Product specification for SS-EN 10080:2005 – Steel for reinforcement of concrete – Weldable reinforcing steel. Technical delivery conditions for bars, coils, welded fabrics, and lattice girders
NS 3576-1	Steels for Reinforcement of Concrete – Dimensions and Properties – Part 1: reinforcing Steel B500NA, NB, NC
SFS 1300	Reinforcing steel. Minimum requirements for weldable reinforcing steel and welded fabrics
NBN A 24-30	Steel products. Steel for reinforcement
PN-H-93220	Steel for concrete reinforcement. Weldable reinforcing steel B500SP – reinforcing bars and wires
NM 01.4.097	Steel products – Reinforcement for reinforced concrete – Weldable bars and wires [MOROCCO]
G30.18-21	Carbon steel bars for concrete reinforcement
NMX-B-506-CANACERO	Steel Industry – reinforcing steel rods for concrete reinforcement – specifications and test methods
NMX-B-A457-CANACERO	Steel Industry – Low-alloy reinforcing steel rods for concrete reinforcement – specifications and test methods
IS 4466 (Part 3)	Steel for the Reinforcement of Concrete: reinforcing Bars
NTP 341.031	Concrete. Carbon steel bars with ribs and plain bars for reinforced concrete. Specifications [PERU]
AS/NZS 4671	Steel for the Reinforcement of Concrete
DS/INF 165	Reinforcing steel for concrete structures - Identification and classification according to EN 10080 and EN 10138
EN 10080 + EN 1992-1-1/A1 part 3.2 Appendix C	Eurocode 2 – Design of concrete structures Part 1-1: General rules and rules for Buildings – Annex C, requirements for materials

3 INFORMATION ON LCA

3.1. Life cycle analysis

The life cycle assessment report for the EPD of Megasa Group steel products, dated December 2025, was carried out by the company Abaleo S.L.

The LCA study follows the recommendations and requirements of international standards:

ISO 14040:2006

ISO 14044:2006

UNE 36904-1:2018

EN 15804:2012+A2:2019/AC:2021.



3.2. Scope of the study

The scope of this EPD is the production of the cradle-to-door with options and modules C and D (A1-A3 + A4 + C + D) of reinforcing steel manufactured by Megasa Siderúrgica.

The specific data on the production process comes from the Narón plant where the product is manufactured and corresponds to production data for the year 2024, which is considered representative.

The product is manufactured in Spain and distributed worldwide, although the LCA calculation has been carried out for Europe. The LCA does not include the following:

- All equipment with a useful life of more than 3 years.
- The construction of plant buildings or other capital assets.
- Staff business travel nor staff commute to and from work.
- Research and development activities.
- Long-term emissions.

3.3. Declared unit

The declared unit is one tonne (1,000 kg) of product, plus its distribution packaging.

3.4. Allocation criteria

In accordance with the criteria of the reference standard, the allocation of inputs and outputs from the system has been applied on the basis of economic values, as the difference between the income from the product and the co-products is very high. This allocation criterion has been applied to the plant's general consumption (consumption of raw materials and energy), emissions, transport and waste.

The quantities of the different materials used and produced in the manufacturing process come from measurements taken at the steel plant itself.


3.5. Cut-off rule

The LCA includes the gross weight/volume of all materials used in the manufacturing process, so that at least 99% of the environmental impacts are obtained.

No energy consumption has been excluded.

3.6. Manufacturing process diagram

PRODUCT STAGE

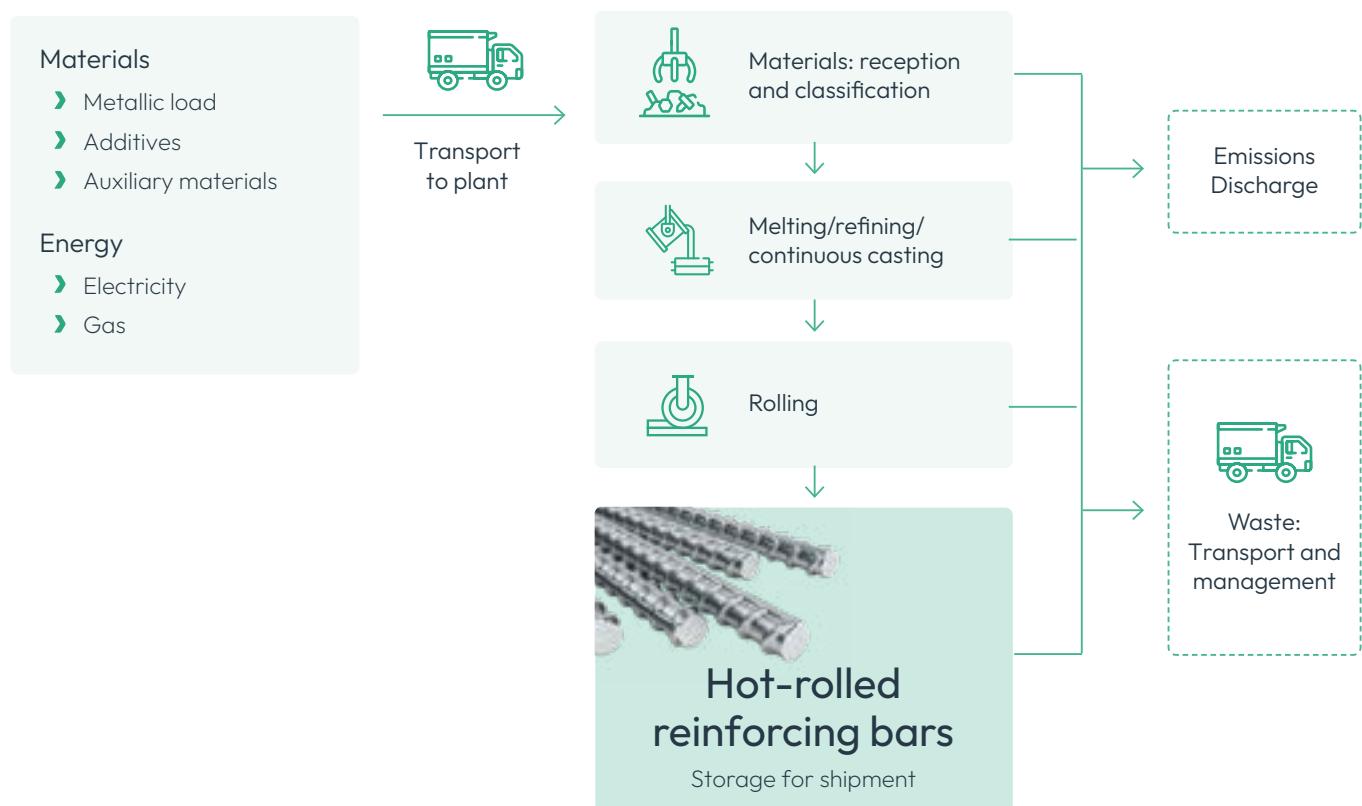

CONSTRUCTION STAGE

USE STAGE

END-OF-LIFE STAGE

The factory produces steel using the electric arc furnace route. The steelworks mainly melt scrap metal, adjusting the chemical composition to obtain the required steel specifications. The resulting material is solidified into billets of different sections and lengths, which constitute the intermediate product used as raw material in the hot rolling process.

At this stage, the billets are reheated to the appropriate temperature and rolled through successive roller mills, where the section is progressively reduced and the material elongated until achieving the dimensions and characteristics of the final product. After cooling, the steel is presented in the form of bars or coils, ready for shipment or further processing.

3.7. Representativeness, quality and selection of data

To model the manufacturing process of the product under study, specific production data from the Narón plant for the year 2024 – a period with representative production data – has been used.


The plant is authorised as a ferrous metal waste treatment facility for recovery operations, using the scrap metal it receives directly as secondary raw material in the production process without any treatment prior to melting in the electric furnace; therefore, the scrap metal used as raw material is considered to be burden free, as is its transport to the steelworks, the impact of which corresponds to the previous product system.

Internal scrap metal consumption has not been considered in the calculation of the secondary material indicator used. Where necessary, the Ecoinvent 3.11 database (March 2025) has been used, which is the latest version available at the time of the LCA.

SimaPro 10.2.0.0 software – the most up-to-date version available at the time of the study – was used for the inventory data, to model the LCA and to calculate the environmental impact categories required by the reference standard.

The semi-quantitative data quality assessment criteria proposed by the European Union in its Environmental Footprint Guide for Products and Organisations were applied to assess the quality of the primary data used in the LCA. The following results were obtained:

- Technological representativeness (TeR) – 1.99
- Geographical representativeness (GeR) – 2.23
- Temporal representativeness (TiR) – 1.86
- Accuracy (A) – 1.00.

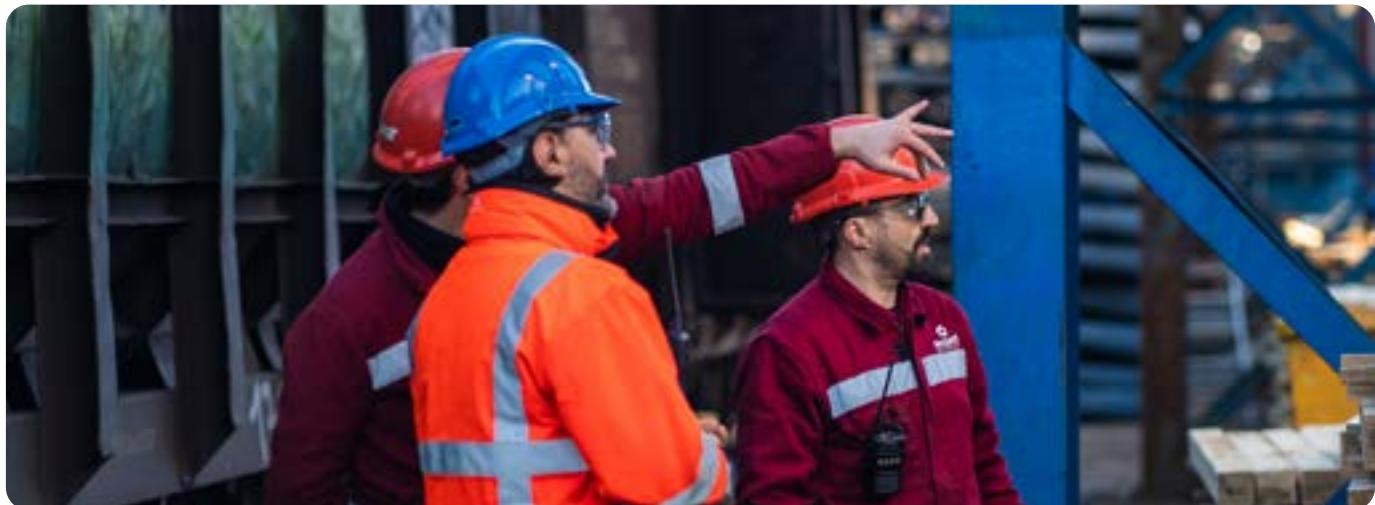

According to the above data, the Data Quality Rating (DQR) takes the following value 1.79, indicating that the data quality is very good.

To better understand the data quality assessment carried out, it should be noted that the rating for each criterion ranges from 1 to 5 (the lower the rating, the higher the quality) and that the following table is used to obtain the final rating:


Overall data quality rating (DQR)	Overall data quality level
≤ 1.6	Excellent quality
1.6 to 2.0	Very good quality
2.0 to 3.0	Good quality
3 to 4.0	Reasonable quality
> 4	Insufficient quality

4

SYSTEM LIMITATIONS

Scenarios and additional technical information

The product system studied in the LCA of the reinforcing bars and coils produced by GRUPO MEGASA is a cradle to gate system with options. The following production phases have been studied:

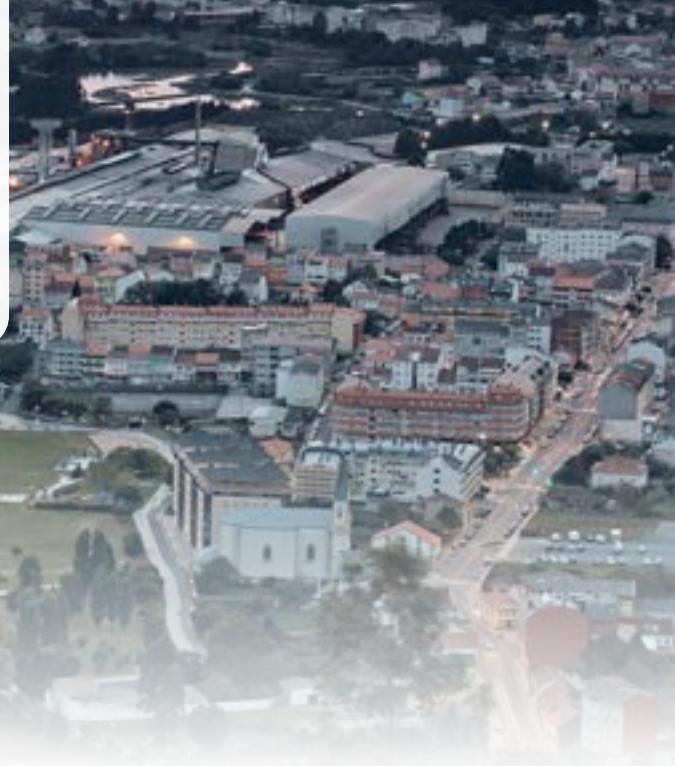

Module A1:

Raw material production

This module covers the raw material production process, which includes:

- The extraction of resources and production of raw materials.
- Transport to raw material treatment/production centres.
- Energy and fuel consumption during the production of raw materials.
- The consumption of other resources (such as water) during the production of raw materials.

➤ The generation of waste and emissions to air and discharges to water and soil during the production of raw materials.

➤ The generation of electricity used in the manufacturing process.

Module A2:

Transport

Transport by truck and ship of raw and auxiliary materials from the production sites (suppliers) to the steelworks has been considered. The transport distances have been provided by the plant managers, who are aware of the location of their suppliers' facilities.

Internal plant transport is also included.

Module A3: Manufacturing

This stage considers the consumption of auxiliary materials for production (auxiliary materials and general plant consumption); the production of packaging necessary for product distribution to customers; emissions to air and water; and the transport and treatment by waste managers of waste generated during this stage of the life cycle.

The transport distances for waste have been provided by plant managers, who are aware of the location of their waste managers' facilities.



Module A4: Transport to the place of use

Finished product transport from the plant where the steel is manufactured to the customer has been considered, using data from 2024, distinguishing the means of transport used: EURO 6 lorry (18-32 tonnes) or container ship.



Parameter	Value (per unit declared)
Litres of diesel	EURO5 Lorry(GVW:15.9ton) 0.044 l/tkm
	Ship 0.003 l/tkm
Average distance	EURO5 Lorry(GVW:15.9ton) 315.22 km
	Ship 4,066.19 km
Occupancy rate (including empty return journeys)	50%
Apparent density of transported goods	7,850 kg/m ³
Useful capacity factor	1

Module C1: Deconstruction/demolition

The LCA assumes that 100% of the steel product manufactured has been used as reinforcement in construction, i.e. integrated into other structures.

A generic process from the Ecoinvent 3.11 database has been used to represent the demolition process.

Module C2: Transport to the waste treatment/ recovery site

It is considered that, at the end of its useful life, the product studied is transported to the waste management point by EURO 5 lorry (18-32 tonnes) and container ship.

The average transport of scrap metal received at the steel plant, authorised as a waste treatment facility for recovery operations (R4 - recycling or recovery of metals and metal compounds), has been considered.

Life Cycle Information UNE-EN 15804															Additional information		
A1 to A3			A4 to A5		B1 to B7							C1 to C4				D	
Product stage			Construction process stage		Use stage							End-of-life stage				Benefits and burdens beyond the system	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	MNE	MNE	MNE	MNE	MNE	MNE	MNE	MNE	X	X	X	X	X	
Supply of raw materials	Transport	Manufacturing	Transport	Construction/installation process	Scenario	Use	Maintenance	Repair	Replacement	Refurbishment	Energy use in service	Water consumption during operation	Deconstruction, demolition	Transport	Waste treatment	Waste disposal	Potential for reuse, recovery and recycling
Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	

X: Module evaluated. / **MNE:** Module not declared.

Module C3 and C4: Waste treatment, and Waste disposal

To determine the percentages of recycling and landfill and incineration of the products studied, the criteria of Part C of Annex 2 V2.1 (May 2020) of the Circular Footprint Formula of the European Union's Environmental Footprint methodology are applied (COMMISSION RECOMMENDATION (EU) 2021/2279 of 15 December 2021 on the use of environmental footprint methods to measure and communicate the environmental performance of products and organisations throughout their life cycle).



Parameter	Value (per declared unit)
Demolition	0.626 MJ
Recovery system, specified by type	0 kg - reuse 950 kg - recycling
Disposal, specified by type	27.5 kg - final disposal (landfill) 22.5 kg - incineration
Assumptions for scenario development	Waste transport to the waste managers Lorry: 93.45 km Ship: 519.84 km

Module D: Benefits and burdens beyond the system

This module declares the benefits and burdens resulting from the net flow of fuels or secondary materials leaving the product system, excluding flows classified as co-products.

It is assumed that metals reach their final waste state after a sorting and shredding process. Treatment, as well as the net benefits and burdens of reuse or recycling potentials (only for the net amount of scrap), are grouped in this module.

The potential environmental benefits are presented for the net steel scrap produced at the end of the product's life, calculated as follows: Net scrap = Amount of steel recycled at the end of life - Scrap from previous product life cycles. A reduction coefficient of 10% is applied for material loss in avoided product recovery.

5 DECLARATION OF LCA AND LCI ENVIRONMENTAL PARAMETERS

The results of the end-of-life stages (modules C1-C4) must be considered when using the results of the product stage (modules A1-A3). The estimated impact results are relative and do not indicate the final value of the impact categories, nor do they refer to threshold values, safety margins or risks. The EN 15804 characterisation factors are based on EF 3.1.

Mandatory impact category indicators according to EN 15804							
Parameter	A1-A3	A4	C1	C2	C3	C4	D
GWP-total	3.46E+02	8.62E+01	5.92E+01	1.93E+01	4.81E+00	2.66E-01	1.13E+00
GWP-fossil	3.46E+02	8.62E+01	5.92E+01	1.93E+01	4.79E+00	2.66E-01	8.29E-01
GWP-biogenic	2.51E-01	3.27E-03	2.97E-03	7.05E-04	7.47E-03	3.19E-04	2.98E-01
GWP-luluc	2.53E-01	2.08E-03	2.44E-03	3.96E-04	9.66E-03	8.49E-06	3.22E-04
ODP	6.32E-06	1.63E-06	9.02E-07	3.96E-07	7.29E-08	5.37E-09	8.79E-09
AP	1.28E+00	1.27E+00	5.47E-01	1.91E-01	3.02E-02	1.96E-03	2.56E-03
EP-freshwater	8.76E-03	6.05E-05	5.58E-05	1.28E-05	3.18E-04	9.00E-07	1.61E-05
EP-marine	2.88E-01	3.15E-01	2.58E-01	5.24E-02	9.07E-03	9.04E-04	1.93E-03
EP-terrestrial	2.91E+00	3.49E+00	2.83E+00	5.80E-01	9.99E-02	9.92E-03	1.07E-02
POFP	1.12E+00	1.01E+00	8.44E-01	1.75E-01	3.03E-02	3.03E-03	3.38E-03
ADP-minerals&-metals ²	7.93E-05	1.56E-06	2.08E-06	4.15E-07	2.67E-07	8.82E-09	1.88E-08
ADP-fossil ²	6.62E+03	1.11E+03	7.75E+02	2.51E+02	9.64E+01	3.52E+00	6.82E+00
WDP ²	1.03E+02	3.65E-01	5.78E-01	8.17E-02	6.94E-01	4.31E-03	1.99E-02

- GWP-total (kg CO₂ eq): Global warming potential.
- GWP-fossil (kg CO₂ eq): Global warming potential of fossil fuels.
- GWP - biogenic (kg CO₂ eq): Biogenic global warming potential.
- GWP - luluc (kg CO₂ eq): Global warming potential of land use and land use change.
- EP-marine (kg N eq): Eutrophication potential, fraction of nutrients reaching the final marine water compartment.
- EP-terrestrial (mol N eq): Eutrophication potential, cumulative surplus.
- POFP (kg NMVOC eq): Tropospheric ozone formation potential.
- ODP (kg CFC-11 eq): Ozone depletion potential.
- AP (mol H+ eq): Acidification potential, cumulative surplus.
- EP-freshwater (kg P eq): Eutrophication potential, fraction of nutrients reaching the final freshwater compartment.
- ADP-minerals&metals (kg Sb eq): Abiotic depletion potential for non-fossil resources.
- APD-fossil (MJ, v.c.n): Abiotic depletion potential for fossil resources.
- WDP (m³): Water deprivation potential (user), weighted water deprivation consumption.

Additional mandatory and voluntary impact category indicators							
Parameter	A1-A3	A4	C1	C2	C3	C4	D
GWP-GHG*	3.46E+02	8.62E+01	5.92E+01	1.93E+01	4.81E+00	2.66E-01	1.13E+00
PM	1.37E-05	3.74E-06	1.58E-05	1.07E-06	4.66E-07	7.28E-08	4.41E-08
IRP ¹	5.38E+01	9.64E-02	6.44E-02	2.29E-02	6.73E-01	3.74E-04	2.23E-02
ETP-fw ²	6.04E+02	3.77E+01	2.22E+01	8.72E+00	6.68E+00	5.16E+00	5.70E+00
HTP-c ²	6.13E-07	8.59E-09	3.16E-09	1.69E-09	4.26E-10	3.65E-10	3.43E-10
HTP-nc ²	1.25E-05	3.94E-07	5.82E-08	1.05E-07	1.80E-08	1.48E-09	8.39E-09
SQP ²	5.24E+02	1.42E+00	1.32E+00	3.21E-01	8.65E+00	3.42E+00	6.54E-01

- GWP-GHG. Global warming potential excluding biogenic carbon.
- PM (disease incidence). Potential for disease incidence due to particulate matter emissions.
- IRP (kBq U235 eq). Human exposure efficiency relative to U235.
- ETP-fw (CTUe). Comparative toxic unit potential for ecosystems - freshwater.

- HTP-c (CTUh). Comparative toxic unit potential for ecosystems - carcinogenic effects.
- HTP-nc (CTUh). Comparative toxic unit potential for ecosystems - non-carcinogenic effects.
- SQP (Pt). Soil quality potential index.

Note 1. This impact category deals mainly with the potential impacts of low doses of ionising radiation on human health from the nuclear fuel cycle. It does not consider the effects of possible nuclear accidents or occupational exposure due to the disposal of radioactive waste in underground facilities. The ionising radiation potential of soil due to radon or certain building materials is also not measured in this parameter.

Note 2. The results of this environmental impact indicator should be used with caution as the uncertainties in the results are high and experience with this parameter is limited.

*This indicator accounts for all greenhouse gases except the absorption and emissions of biogenic carbon dioxide and biogenic carbon stored in the product. Therefore, the indicator is identical to the total GWP, except that the conversion factor for biogenic CO₂ is set to zero.

Indicators for resource use							
Parameter	A1-A3	A4	C1	C2	C3	C4	D
PERE	1.29E+03	2.44E+00	1.66E+00	5.82E-01	1.65E+01	1.18E-02	5.48E-01
PERM	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	1.29E+03	2.44E+00	1.66E+00	5.82E-01	1.65E+01	1.18E-02	5.48E-01
PENRE	6.62E+03	1.11E+03	7.75E+02	2.51E+02	9.69E+01	3.54E+00	6.82E+00
PENRM	5.14E-01	0.00E+00	0.00E+00	0.00E+00	-4.88E-01	-2.57E-02	0.00E+00
PENRT	6.62E+03	1.11E+03	7.75E+02	2.51E+02	9.64E+01	3.52E+00	6.82E+00
SM	8.52E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	2.01E+00	2.10E-02	2.35E-02	4.82E-03	4.54E-02	1.67E-04	1.43E-03

- PERE (MJ, v.c.n.). Use of renewable primary energy excluding renewable primary energy resources used as raw materials.
- PERM (MJ, v.c.n.). Use of renewable primary energy used as raw materials.
- PERT (MJ, v.c.n.). Total use of renewable primary energy.
- PENRE (MJ, v.c.n.). Use of non-renewable primary energy, excluding non-renewable primary energy resources used as raw materials.
- PENRM (MJ, v.c.n.). Use of non-renewable primary energy used as raw materials.
- PENRT (MJ, v.c.n.). Total use of non-renewable primary energy;.
- SM (kg). Use of secondary materials.
- RSF (MJ, v.c.n.). Use of renewable secondary fuels
- NRSF (MJ, v.c.n.). Use of non-renewable secondary fuels.
- FW (m3). Net use of fresh water resources.

The balance of biogenic CO₂ and the energy used as raw material for packaging has been calculated in modules A1-A3.

Waste categories							
Parameter	A1-A3	A4	C1	C2	C3	C4	D
HWD	1.87E-02	6.51E-03	5.32E-03	1.56E-03	2.88E-04	2.30E-05	3.45E-05
NHWD	1.24E+01	2.98E-02	2.77E-02	7.51E-03	4.95E-02	4.23E+01	6.30E-01
RWD	3.44E-02	5.75E-05	3.61E-05	1.40E-05	5.53E-04	2.34E-07	1.83E-05

- HWD (kg). Hazardous waste disposed of.
- RWD (kg). Radioactive waste disposed of.
- NHWD (kg). Non-hazardous waste disposed of.

Output flows							
Parameter	A1-A3	A4	C1	C2	C3	C4	D
CRU	0.00E+00						
MFR	1.10E+01	0.00E+00	0.00E+00	0.00E+00	9.50E+02	0.00E+00	0.00E+00
MER	4.38E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.25E+00	0.00E+00
EEE	5.57E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET	7.50E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

- CRU (kg). Components for reuse.
- EEE (MJ). Electrical energy exported.
- MFR (kg). Materials for recycling.
- EET (MJ). Thermal energy exported.
- MER (kg). Materials for energy recovery.

6

ADDITIONAL ENVIRONMENTAL INFORMATION



6.1. Other indicators

The manufacture of the reinforcing steel studied generates the following co-products for sale to third parties:

Parameter	Kg (per declared unit)
Flakes/Mill scale	1.42E+01
Scrap soil	1.19E+01

6.2. Indoor air emissions

The manufacturer declares that the steel studied does not generate emissions to indoor air during its useful life.

6.3. Emissions to soil and water

The manufacturer declares that the steel studied does not generate significant emissions to soil or water during its useful life.

6.4. Biogenic carbon content

The manufacturer declares that the products studied do not contain materials with biological content.

The packaging with biogenic carbon content used for the distribution of the products is shown in the following table:

Parameter	kg biogenic carbon (per declared unit)
Product	0
Packaging	2.65E-02

6.5. Electricity mix used

The residual electricity mix of the supplier has been used, obtained from the CNMC annual report for 2024.

In addition, the plant has energy with Guarantees of Origin: 36.14% from wind power.

Mix - GWP - gCO2 eq/kWh	
Average Mix	181.35

REFERENCES

1

UNE 36904-1:2018. Steel industry. Environmental product declarations. Product category rules. Steel products for structures. Part 1: Basic products.

2

EN 15804:2012+A2:2019/AC:2021. Sustainability in construction. Environmental product declarations. Basic product category rules for construction products.

3

General Instructions for the GlobalEPD Programme, 3rd revision. AENOR. October 2023.

4

EN ISO 14025:2010 Environmental labels. Type III environmental claims. Principles and procedures (ISO 14025:2006).

5

EN ISO 14040:2006/A1:2021. Environmental management. Life cycle assessment. Principles and framework. Amendment 1. (ISO 14040:2006/Amd 1:2020).

6

EN ISO 14044:2006/A1:2021. Environmental management. Life cycle assessment. Requirements and guidelines. Amendment 2. (ISO 14044:2006/Amd 2:2020).

7

Life Cycle Assessment Report for Environmental Product Declarations for Megasa Group steel products, prepared by Abaleo S.L., December 2025. Version 2.

8

Environmental impact assessment databases and methodologies applied using SimaPro 10.2.0.0.



MEGASA

A verified environmental declaration



GlobalEPD
A VERIFIED ENVIRONMENTAL DECLARATION

ECO-PLATFORM
EPD
VERIFIED

AENOR